



Manufactured By:
 134 Ferry St.
 South Grafton, Ma 01560
 www.huesonwire.com

Issue Date: 5/11/2020

Issue: 1

Construction

Description: 2/C 18 16/30 TC PVC/PVC		Diam. (In)
Component:	2 Conductors	
Conductor:	18 AWG 16/30 Tinned Copper to ASTM B-174	
Insulation:	0.01" Premium Grade PVC	0.067" +/- .003" 0.067"
Color Code:	Black, Red 0.067"	
Cable Assembly:	Bunch Cable 2 Conductors 0.134"	
Separator	Tissue Paper Separator 0.138"	
Jacket:	0.035" Flexible PVC, Oil, Moisture UV Resistant, VW-1 0.205"	
Jacket Color:	Black	0.205" +/- 0.010" 0.205"

Print: E174416 RU AWM 2661 105C 300V VW-1 --- cRU I/II A 105C 300V FT1 18/2

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>
UL	AWM-2661	105C	300	VW-1
Canadian cRU	2661	105C	300	FT-1

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65:


IQ-190529

Manufactured By:



Issue Date: 5/11/2020
Issue: 1

Drawing/Rotation:

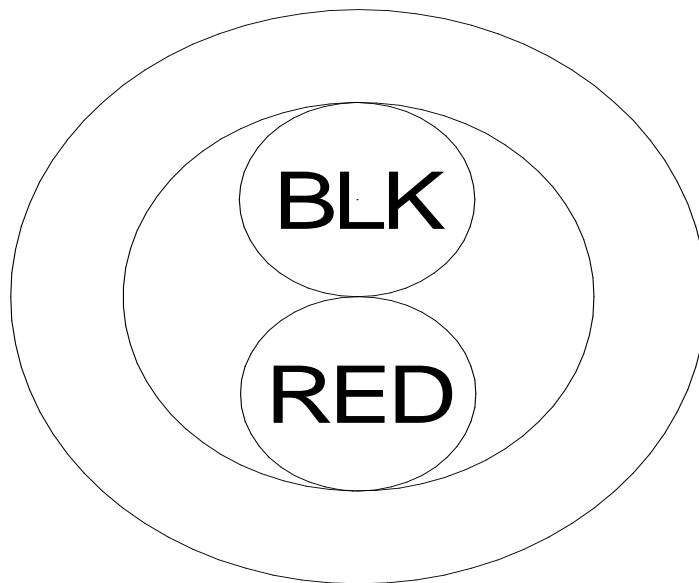

IQ-190529