



DESC: 18/3 SJEOW 105°C 300V

DWG NO: 1803E004

SCALE: 10x


DATE: 11/14/00 DR. BY: D. OLSON

NWI P/N: FSJE183-81K

BULK PART NO: BNMIE183-801

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

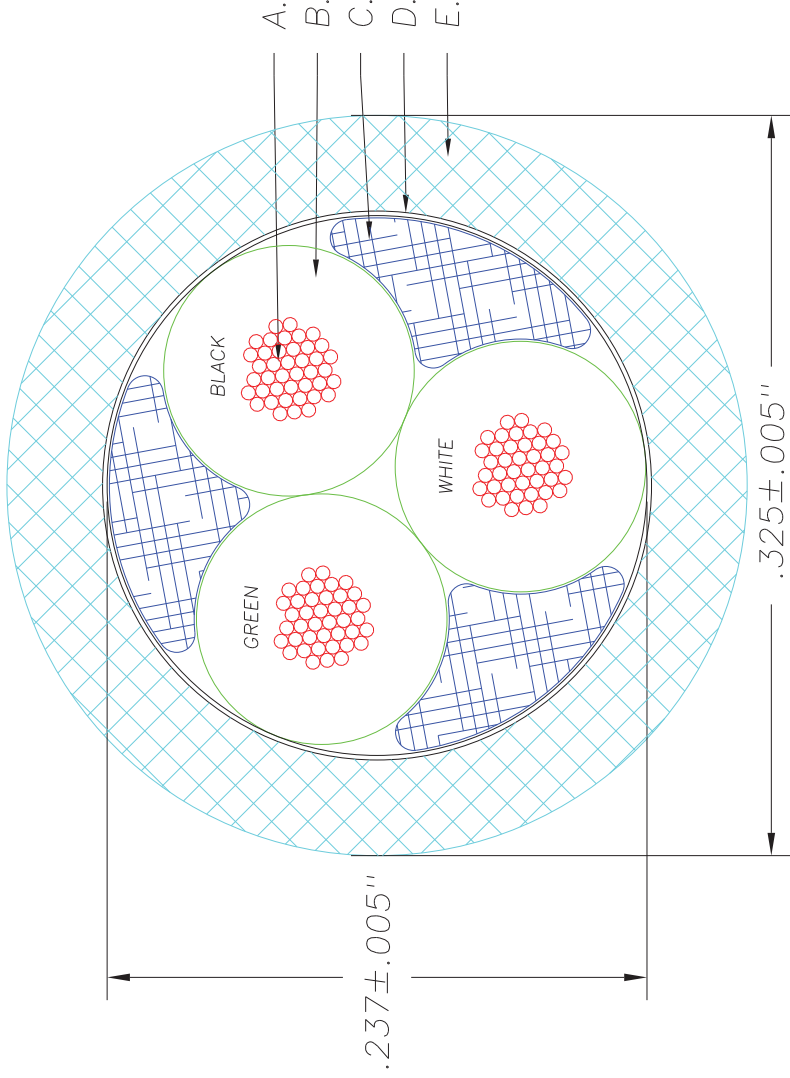

ITEM

SPECS.

A.

18 AWG 41X34 BARE BUNCHED STRANDING
O.D. .049±.003"

B.

30 MILS ENDUROFLEX INSULATION 300V
27 MILS MIN. ENDUROFLEX INSULATION
O.D. .110±.002"

C.

FLAME RETARDENT POLY FILLER

D.

TISSUE PAPER SEPARATOR

E.

30 MILS PRESSURED ENDUROFLEX JACKET 300V
24 MILS MIN. ENDUROFLEX

JACKET COLOR: BLACK

CABLE IS UL AND CSA APPROVED

CHG TO POLY FILLER

B

07/10/13

GM

INITIAL RELEASE

A

11/14/00

D.O

REVISION RECORD

REV DATE

APPROVAL

APPROVAL