


DGC DATA GUIDE CABLE

SPECIALTY & CUSTOM CABLES

232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataguidecable.com

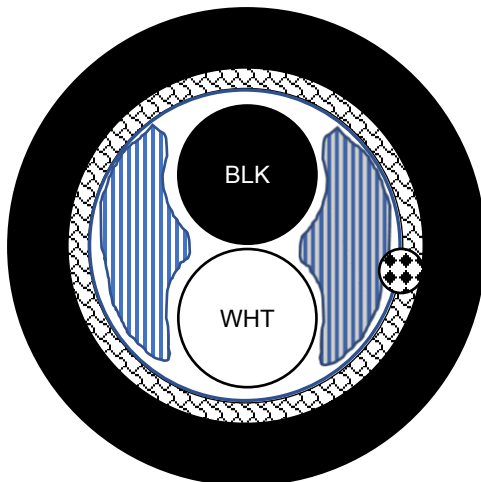

1PR 16 FOIL SHIELDED CABLE

LISTING / AGENCY APPROVAL

COMPONENT A

CONDUCTORS (2 total):

16 AWG 7/.0192 TC Insulated with .035" Nominal Wall of Low Molecular Weight PE to a Nominal O.D. of 0.128"

COLORS:

BLACK, WHITE

CABLE ASSEMBLY:

Binder: Aluminum/Polyester, 25% Overlap
 Drain: 18 AWG, 7/.0152 TC Under Tape Shield
 Filler: Fibrillated Polypropylene
 3.75" Nominal Left Hand Direction Lay

BRAID SHIELD:

34 AWG 7 Strand TC Braid, 87% Coverage

FINAL JACKET:

Material: PVC
 Color: BLACK
 Wall Thickness: 0.073"
 Finished Cable Diameter: .430"
 Manufacturer Identification Thread Pulled in Under Jacket

Temperature Range: -40C to +80C
 Max Operating Voltage: 2000 RMS

RoHS

REVISION HISTORY

0	2/3/2020	WJD	FIRST ISSUE
---	----------	-----	-------------

Customer Number	LW 610-63
D.G. Part Number	20A27-7
Prepared By: MKL	
Reviewed By: WJD	

CUSTOMER APPROVAL (AS APPLICABLE)

Title: May Arellano - Purchaser

Date: 2-5-2020