


UL 2517 26AWG/3Pr Individual Shielded Cable



PRODUCT DATA SHEET

External interconnection of electronic equipment or internal wiring of electronic equipment or appliances.

Design Number 10214
Part Number 32122631
Customer Number N/A

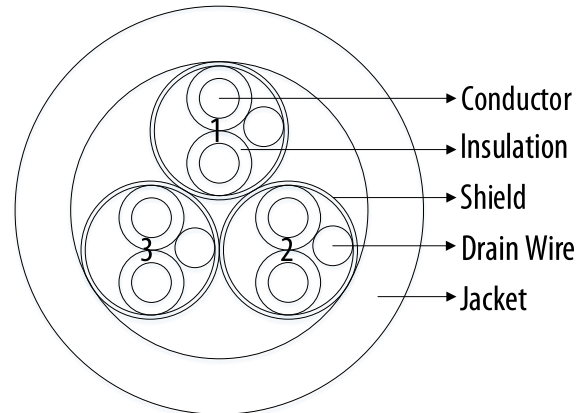

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 26AWG(7/34)
Insulation: Polyvinyl Chloride
Insulation Avg. Thickness: 0.010"(Nom.)
Insulation Diameter: 0.039"(Nom.)
Drain Wire: 26AWG(7/34), stranded tinned copper
Individual Shield: Al-mylar (Al face in)
Jacket Material: Flexible Polyvinyl Chloride
Jacket Avg. Thickness: 0.032"(Nom.)
Overall Diameter: 0.206"(Nom.)
Jacket Color: Black

Print Legend:

E477982 UH AWM-2517 105C 300V VW-1 --- c AWM I/II
A/B 105C 300V FT1

Color Code: 1. White, Black 2. Red, Green 3. Yellow, Blue

PHYSICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 300V
Flame Test: UL VW-1 and CSA FT1

SAFETY CHARACTERISTICS

Approvals: UL 758, UL 1581 and AWM UL 2517
RoHS EU Directive 2011/65/EU (1&2&3)
REACH Regulation 205 compliant
California Prop 65 compliant

Application: ASCENT cables are made with flexible polymers insulating jackets that are oil, moisture, and UV resistant.

All trademarks are property of their respective owners. All specifications are subject to change.

| Revision History | | |
|------------------|-------------------|-----------------|
| 00 | 2020/03/18 | Initial release |
| | | |
| Created L. Jian | Approved A. Huang | |

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

