

UL CMR/2464 22AWG/4C, Foil Shielded Cable

PRODUCT DATA SHEET

Cable is suitable for installation under NEC (NFPA 70) article 800 guidelines.

Cable is suitable for installation in Canada under Section 60 of CEC, Part I.

Internal wiring or external interconnection of electronic equipment.

Design Number 10330
Part Number 32130969
Customer Number N/A

CONSTRUCTION

Conductor: Stranded tinned copper

Conductor Size: 22AWG(7/30)

Insulation: Polyvinyl Chloride

Insulation Thickness: 0.010"(Nom.)

Insulation Diameter: 0.050"(Nom.)

Cable Lay Length: 2.25"(Nom.)

Tape: Al-mylar (Aluminum side facing out), 100% coverage

Drain Wire: Stranded tinned copper, 22AWG 7 Strands

Jacket Material: Polyvinyl Chloride


Jacket Thickness: 0.032"(Nom.)

Overall Diameter: 0.187"(Nom.)

Jacket Color: Gray(-18)

Print Legend (Footage Markers):

ASCENT E478021 22AWG 4C SHIELDED 75C C(UL)US TYPE CMR SUN RES
FT4 OR AWM 2464 300V 80C "ROHS COMPLIANT"

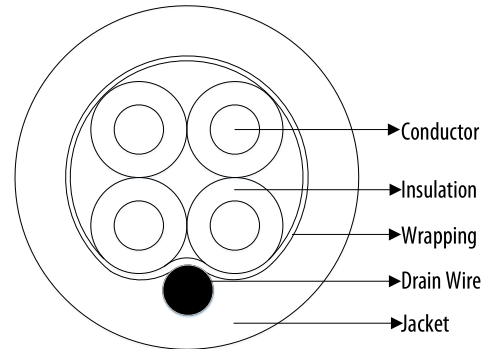

Color Code: Black, White, Red, Green

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 80°C

Operating Voltage: 300V

Weight: 25 Lbs/Mft

Flame Test: Cable meets (UL) 1685 FT4

SAFETY CHARACTERISTICS

Approvals: UL AWM Style 2464 per UL standard 758

C(UL)US listed as CMR per UL standard 444 and per CSA C22.2 No. 214-17

RoHS Compliant: European Directive 2015/863/EU

REACH Compliant: Regulation (EC) No 1907/2006 (197)

Application: Internal wiring or external interconnection of electronic equipment

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/06/22	Initial Release
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK

Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA

Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

