

# 18/3 Type SJT Black



PRODUCT DATA SHEET

SJT Cord is a hard usage service cord designed for use with heavy tools, equipment, portable lights, and power extensions. It is also used with large appliances and lighting installations.


**Design Number** 10261  
**Part Number** 32131482  
**Customer Number** N/A

## CONSTRUCTION

**Conductor:** Stranded bare copper  
**Conductor Size:** 18AWG(41/34)  
**Insulation:** Polyvinyl chloride (PVC)  
**Insulation Avg. Thickness:** 0.030" (Nom.)  
**Insulation Diameter:** 0.110" (Nom.)  
**Filler:** PP  
**Separator:** Paper  
**Jacket Material:** Polyvinyl chloride (PVC)  
**Jacket Avg. Thickness:** 0.030" (Nom.)  
**Overall Diameter:** 0.311" (Nom.)  
**Jacket Color:** Black

### Print Legend:

ASCENT E486041 IH (UL) SJT VW-1 105°C 300V 3/C 0.823 mm<sup>2</sup> (AWG 18) c(UL) SJT FT2 105°C 300V 3/C 18 AWG (0.823 mm<sup>2</sup>)

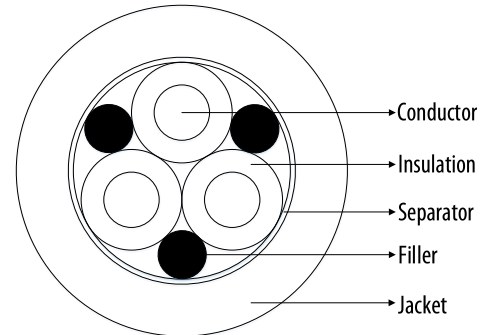

**Color Code:** 1. Black 2. White 3. Green/yellow

## ELECTRICAL CHARACTERISTICS

**Operating Temperature (°C):** 105°C  
**Operating Voltage:** 300V  
**Conductor Resistance @ 25°C:** 22.8 Ω/km Max  
**Flame Test :** UL VW-1 and CSA FT2

## SAFETY CHARACTERISTICS

**RoHS Compliance:** European Directive 2015/863/EU  
**Approvals:** UL, the basic standard is UL 62 "Flexible Cords and Cables"  
c(UL) approved to meet CSA standard C22.2, flexible cords

**Application:** Generally in connections in damp and wet areas as refrigerators, washing machines, and spin-dryers.

*All trademarks are property of their respective owners. All specifications are subject to change.*

Revision History		
00	2020/07/18	Initial release
Created L.Jian		Approved A. Huang

**Bristol** | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK  
**Frankfurt** | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf  
**Milwaukee** | 5001 South Towne Dr. New Berlin, WI 53151 USA  
**Suzhou** | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

