

18/2 Type SJT 105C Black



PRODUCT DATA SHEET

SJT Cord is a hard usage service cord designed for use with heavy tools, equipment, portable lights, and power extensions. It is also used with large appliances and lighting installations.


Design Number 10262
Part Number 32131483
Customer Number N/A

CONSTRUCTION

Conductor: Stranded bare copper
Conductor Size: 18AWG(41/34)
Insulation: Polyvinyl chloride (PVC)
Insulation Avg. Thickness: 0.030" (Nom.)
Insulation Diameter: 0.110" (Nom.)
Filler: PP
Separator: Paper
Jacket Material: Polyvinyl chloride (PVC)
Jacket Avg. Thickness: 0.030" (Nom.)
Overall Diameter: 0.291" (Nom.)
Jacket Color: Black

Print Legend:

ASCENT E486041 IH (UL) SJT VW-1 105°C 300V 2/C 0.823 mm²(AWG 18) c(UL)
SJT FT2 105°C 300V 2/C 18AWG (0.823 mm²)

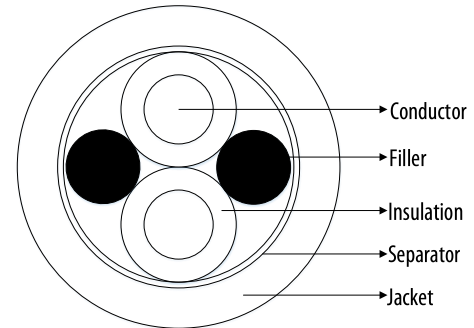

Color Code: 1. Black 2. White

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 300V
Conductor Resistance @ 25°C: 22.8 Ω/km Max
Flame Test : UL VW-1 and CSA FT2

SAFETY CHARACTERISTICS

RoHS Compliance: European Directive 2015/863/EU
Approvals: UL, the basic standard is UL 62 "Flexible Cords and Cables"
c(UL) approved to meet CSA standard C22.2, flexible cords

Application: Generally in connections in damp and wet areas as refrigerators, washing machines, and spin-dryers.

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/03/23	Initial release
Created L.Jian		Approved A. Huang

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

