REV.	DESCRIPTION	DATE
0	Initial release.	6/18/2018

General Properties 4 AWG 133/25 BC EXRAD FX Battery Cable

General Composition of Cable See Below

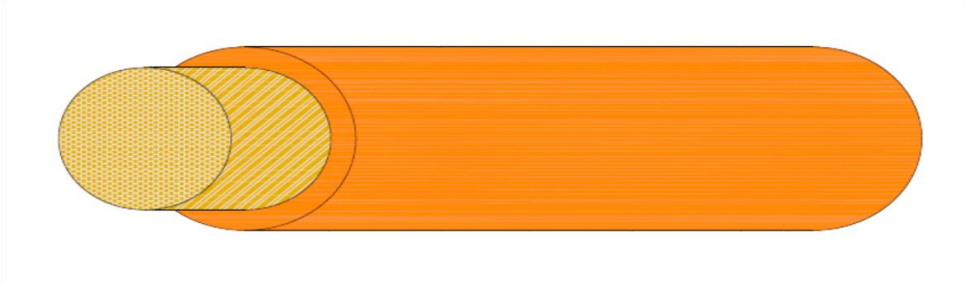

(Dimensions based upon 15-07467-xxx)

Part Number (preassigned)	Color Code
15-08424-002	Red
15-08424-001	Black
15-08424-003	Orange

Packaging:
2000ft/24" wood spool
Min length 250ft, up to 3 lengths per spool

Physical Data

	Description					Dimensions (Nom.) inches	mm
1.	Conductor:	4 AWG 133/25 BC			.238" min, .245" Max	0.242	6.15
2.	Insulation.	EXRAD FX	wall thickness:	30 mil nom.	.292" Min, .312" Max	0.302	7.67

Custom Print Legend BATTERY CABLE STX XXX AWG SAE J1127 60V DC 150°C (DRY) OIL & GASOLINE RESISTANT CCC XXXXX
Print Spacing: every 12 inches XXX=Awg Size XXXXX=Lot Code Info

Electrical Data
Min. Conductor Area (CMA): 37360
Voltage Rating: 60V per SAE J1127

General Data
Use: Battery Cable
Temperature Range: -40º C to +150º C

Bend Radius:

inches	mm
1.2	31

CHAMPLAIN CABLE

TITLE

4 AWG 133/25 EXRAD FX-Custom Print Legend-Mercury Marine

UNLESS OTHERWISE SPECIFIED, DIMENSIONS AND TOLERANCES ARE IN INCHES

DRN. Steve Blum — DATE 6/18/2018
CKD. Sue Tatro — DATE 6/18/2018

DO NOT SCALE THIS DRAWING

SIZE A — PART NUMBER 15-08424-XXX — DOCUMENT NUMBER 17229

The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.

CSF-020