


Diagram

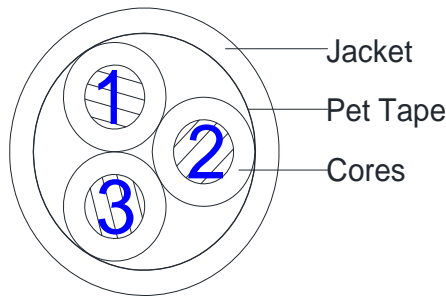

Description

Cable Part Code*	TC4CLCU03
Cable Type	4C14AWG NYLON/PVC TC 600V
Reference Standards	UL 1277 TC-ER, UL 83

Conductor

Conductor Material	Stranded Bare Copper
Conductor Size	14AWG
Conductor Stranding Standard	IEC 60228-Class 2

Insulation

No. of Cores/Pair/Triad/Quad	4 Cores
Insulation Material	PVC + NYLON
Nom. Insulation Diameter(mm)	2.9
Insulation Color Code	Black color cores with number coding 1~2 & Yellow/Green

Outer Jacket/Sheath Material

Outer Jacket Material	PVC
Nom. Outer Jacket Thickness(mm)	1.14
Nom. Overall Diameter(mm)	9.5

Physical/Mechanical Properties

Wet Temperature Range	75°C
Dry Temperature Range	90°C
UV Resistance	Yes
Flame Retardant	FT4

Electrical Properties

Voltage Rating (V)	600V
Max. Conductor Resistance @20°C (Ω/km)	8.62

*Ordering stock code will be created at the time of placing the order and the stock code will include cable part code, outer jacket color & putup length.

Temporary code

SZ-TC4CLCU03

© 2020 Belden, Inc
All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein. All sales of Belden products are subject to Belden's standard terms and conditions of sale.