


| Rev | ECN No. | Change content | Date |
|-----|---------|----------------|-----------|
| A0 | NA | First issue | 2021/3/25 |

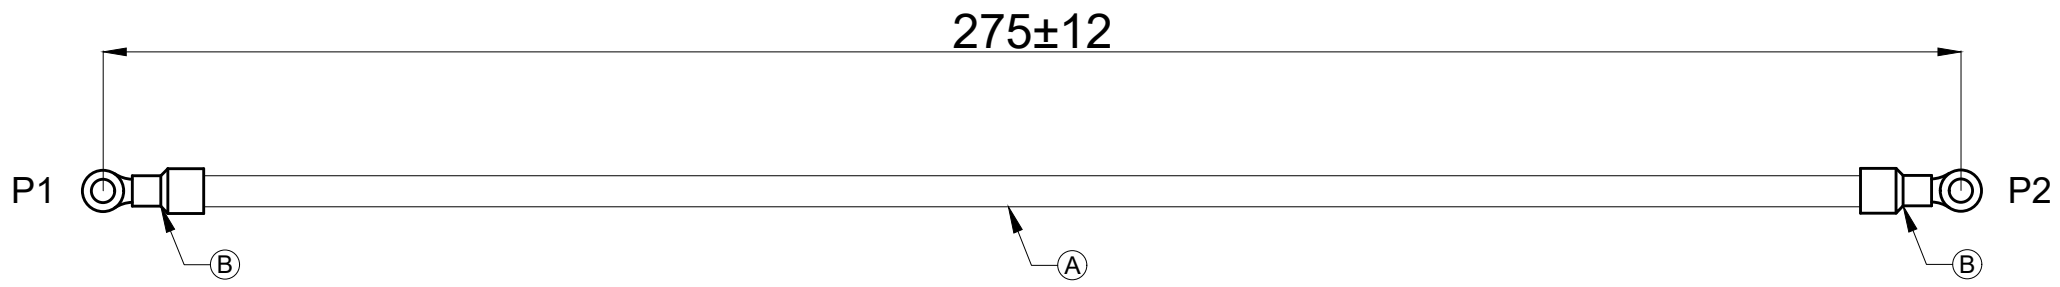

技术要求:
 1、拉拔力:
 端子压接拉力: 16AWG 133.5 N 最小 .
 2、所有的材料需符合RoHS规范要求。

| B | 60300002046 | 端子 | PANDUIT PV14-6RNB-3K | PCS | 1 | |
|-----------------|-----------------|----------------|------------------------------|--------------|-------------|---------------------|
| A | 601001002297 | 电缆 | IEWC 1015/16T26-24E | PCS | 1 | |
| No | Material number | Number | Specifications | Unit | Q'ty | Note |
| Tolerance table | | Product name | / | Product code | R17306-00 | |
| L≤200 | | Specifications | GROUND, WIRE,S/A, BOX TO BOX | Part number | 80000011595 | |
| 200<L≤1000 | | Project name | | Drawing no. | 10490 | |
| 1000<L≤2000 | | Approved by | Checked by | Drawing by | Scale: NA | Size:A4 Page: 1 / 1 |
| 2000<L≤5000 | | | | | | |
| L>5000 | | | | | | |

| | | | | | |
|--------------|----------|---------------------|-----------|----------|--------------|
| PV14-6RNB-3K | 7±0.5 | IEWC 1015/16T26-24E | 265±5 | 7±0.5 | PV14-6RNB-3K |
| P1 端子 | 剥绝缘 (mm) | 线规 | 裁线长度 (mm) | 剥绝缘 (mm) | P2 端子 |

