

Hueson Wire 134 Ferry St. South Grafton, MA 01560 www.huesonwire.com

Issue Date: 7/29/2021

Construction Issue: 1

Description:	4/C 16 19/3	30 BC PVC/PVC Trailer Cable	Diam. (In)		
Component:	4 Conductors				
Conductor:	16 AWG 19/.0117" Bare Copper to ASTM B-8				
Insulation:	0.023"	Premium Grade PVC	0.103 "		
Color Code:	Red, Brown, Yellow, Green				
Cable Assembly:	Bunch Cab	ole 4 Conductors	0.248 "		
Binder:	Non-Woven Polyester Tape				
Jacket:	0.032"	Flexible PVC, Oil, Moisture UV Resistant, VW-1	0.316 "		
Jacket Color:	Black	Pressure Extruded 0.316 +/- 0.05"	0.316 '		
Put-ups:		Preferred Spool Size:			

Print: No Print

Specifications:

Inners designed to meet SAE J1128 Type GPT

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2&3)
- REACH Regulation 210:
- California Prop 65:



This product may contain chemicals known to the state of California to cause cancer. For more information go to www.P65Warnings.ca.gov

IQ-21091




Hueson Wire 134 Ferry St. South Grafton, MA 01560 www.huesonwire.com

Issue Date: 7/29/2021

Issue: 1

Drawing/Rotation:

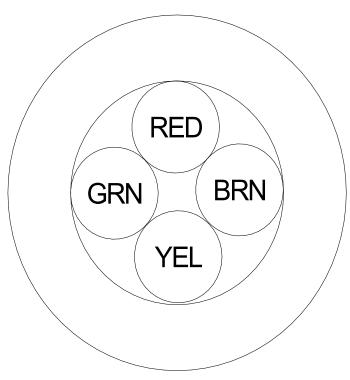

- The design of this cable core is non-concentric which could lead to convolutions on the outside of the finished cable and be problematic if molding.
- If Level 2 Roundness is an absolute requirement of this cable please discuss with the HWC Engineering Team to see if additional fillers can be added and/or a heavier jacket thickness.

Custome	er Approval			
Drawn By:	Dylan P	Signature:		
Date:	7/29/21			

Subject to HWC Tems & Conditons

IQ-21091