



Hueson Wire
 134 Ferry St.
 South Grafton, Ma 01560
 www.huesonwire.com

Issue Date:

Issue: 1


Construction

Description: 4/C Composite 2/C 14 AWG + 2/C 20 AWG PVC/PVC			Diam. (In)
Components:	4 Conductors		
Conductor #1:	14 AWG 19/27 Bare Copper	2 Conductors	0.071 "
Insulation:	0.015" Premium Grade PVC		0.101 "
Color Code:	Red, Black	0.101 +/- .003"	0.101 "
Conductor #2:	20 AWG 19/32 Bare Copper	2 Conductors	0.037 "
Insulation:	0.01" Premium Grade PVC		0.057 "
Color Code:	Green, Yellow	0.057 +/- .003"	0.057 "
Cable Assembly:	Bunch Cable 4 Conductors		0.191 "
Fillers	Fibrillated polypropylene or solid fillers for roundness (Optional)		0.191 "
Separator:	Non-Woven Polyester Wrapping		0.195 "
Jacket:	0.035 Flexible PVC, Oil, Moisture UV , VW-1	0.265 +/- .010"	0.265 "
Jacket Color:	Black		0.265 "
Put-ups:	1,000FT	Preferred Spool Size: 14" X 10"	

Print: No Print

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2&3)
- REACH Regulation 210:
- California Prop 65: IQ-21185


 This product may contain chemicals known to the state of California to cause cancer. For more information go to www.P65Warnings.ca.gov



Hueson Wire
134 Ferry St.
South Grafton, Ma 01560
www.huesonwire.com

Issue Date:
Issue: 1

Drawing/Rotation:

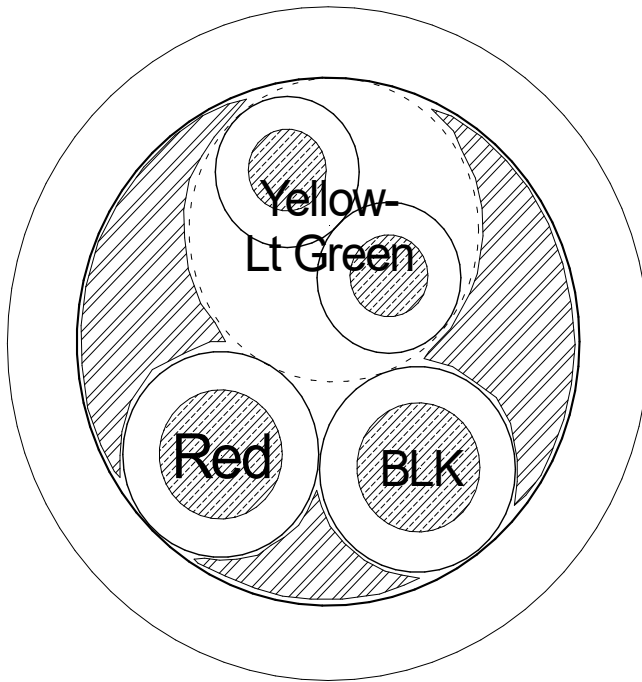

- The design of this cable core is non-concentric which could lead to convolutions on the outside of the finished cable and be problematic if molding.
- If Level 2 Roundness is an absolute requirement of this cable please discuss with the HWC Engineering Team to see if additional fillers can be added and/or a heavier jacket thickness

Customer Approval

Sales I.D.: Dylan P

Signature: _____

Date: 7/29/21

Subject to HWC Terms & Conditions

IQ-21185