


<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
7/12/2007	A	17740	SPECIFICATION CREATED

PRODUCT SPECIFICATION

Parent Number: F18381-

Description: 18 16/30 TC AWM 3215 AWM I A/B Braidless
Silicone

DIAMETER: 0.173
TOLERANCE ±: 0.003

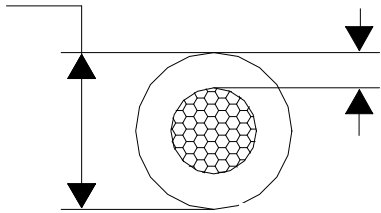

MIN AVG WALL: 0.060
MINIMUM WALL: 0.054

Stranding: 16/30 Tinned Copper

Style: UL: AWM 3215 CSA: AWM I A/B

Insulation: Silicone Rubber

Print Legend: 18 AWG (0.823mm²) E96824 (PLANT ID CODE) (AWM LOGO) AWM 3215 150C 600V - - - 156016 CSA AWM I A/B150C 600V FT2

Voltage: 600V

Temperature: 150C

Notes:

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____



Copperfield[®]
 1115 W. North Street
 Bremen, IN 46506
 Phone: 1-574-546-5115