

UL 4476 3*4mm² Silicone Rubber Cable



PRODUCT DATA SHEET

UL 4476 Multi-core Silicone Wire is suitable for fields that require high temperature endurance.


Design Number 10643
Part Number 32167894
Customer Number N/A

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 4mm²(56/0.30mm)
Insulation Material: Silicone Rubber
Insulation Thickness: 0.76mm(Nom.)
Insulation Diameter: 4.1mm(Nom.)
Assembly: Three cores cabled together
Jacket Material: Silicone Rubber
Jacket Thickness: 1.35mm(Nom.)
Overall Diameter: 11.5±0.3mm
Jacket Color: Black

Print Legend:

ASCENT E477982 CF  AWM 4476 3X4mm² 150°C 600V c  AWM
I A/B 150°C 600V FT2

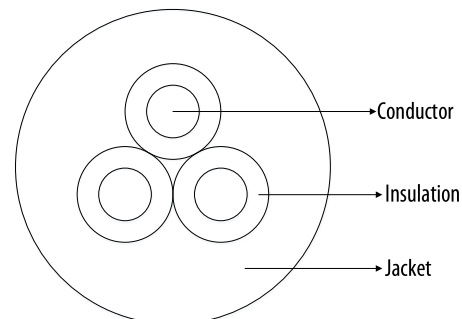

Color Code: Yellow/green, Brown, Blue

PHYSICAL CHARACTERISTICS

Operating Temperature (°C): -50°C to +150°C
Operating Voltage: 600V
Flame Test: FT2
UV Resistance
Waterproof and Moisture-proof

SAFETY CHARACTERISTICS

Approvals: AWM UL 4476
RoHS Compliant

Application: ranges from household appliances, lighting devices, to industrial machines, and high-temperature furnaces

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2022/07/28	Initial release
Created L. Jian	Approved A. Huang	

UK HQ | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

