


18/2C, PVC/PVC Cable



PRODUCT DATA SHEET

Electronic control cable with flame retardant insulation and jacket.

Design Number 10668
Part Number 32168510
Customer Number N/A

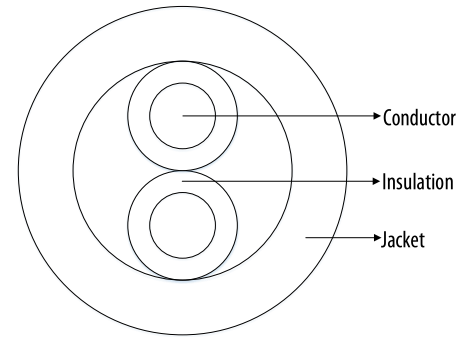

Color Code: 1. Red 2. Black

CONSTRUCTION

Conductor: Stranded bare copper, Class K
Conductor Size: 18AWG, 16 strands
Insulation: Polyvinyl Chloride
Insulation Thickness: 0.011"(Nom.)
Insulation Diameter: 0.068"(Nom.)
Cable Lay Length: 2.00"(Nom.)
Jacket Material: Tube Extruded Polyvinyl Chloride
Jacket Avg. Thickness: 0.032"(Nom.)
Overall Diameter: 0.206"(Nom.)
Jacket Color: Black

Print Legend: No

PHYSICAL CHARACTERISTICS

Operating Temperature (°C): -40°C to +85°C
Weight: 24 Lbs/Mft

SAFETY CHARACTERISTICS

Cable meets RoHS 2002/95/EC Directive, RoHS 2 2011/65/EU Directive, RoHS 3 2015/863/EU Directive
Cable is REACH compliant per Regulation (EC) No 1907/2006 (223) Updated January 17, 2022

Application: Electronic control suitable for controls, displays, sensors, and communication.

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2022/09/27	Initial release
Created L. Jian		Approved A. Huang

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany
Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK
Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

