


Wiremax
 705 Wamba Avenue
 P.O. Box 3336
 Toledo, OH 43607
 Toll Free: 800.843.9473 • Phone: 419.531.9500 • Fax: 419.531.9503
 Email: info@wiremax.com/a • Website: www.wiremax.com

Wiremax Products > Underwriters Laboratories (UL) 3239 Wire > Item # WUT-2520-0

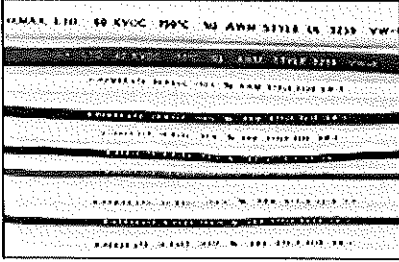

[larger image](#)

Item # WUT-2520-0, Black 0.038 Inch (in) Conductor Diameter Underwriters Laboratories (UL) 3239 Wire

Outstanding Features:

- High Voltage 5 KVDC thru 60 KVDC
- High flexibility
- 24 AWG thru 10 AWG conductors
- Ozone and corona resistant
- Meets VW-1 flame test

[Specifications](#) · [Applications](#) · [Note](#)

Specifications

| | |
|----------------------------------|----------|
| Direct Current (DC) Voltage | 25 kV |
| Conductor/Stranding Construction | 10/30 |
| Color | Black |
| Conductor Size | 20 |
| Conductor Diameter | 0.038 in |
| Nominal Diameter | 0.164 in |
| UL-AWM File Number | E174208 |
| Temperature | 150 °C |
| Manufacturer | Wiremax |

Applications

- Heaters
- Furnaces
- Ovens
- Dryers
- Motors
- Lighting Fixtures
- Signs
- Power Supplies
- CRT Displays
- Corona Treating Equipment
- Misc. Electronic Equipment

Note

Standard Construction for UL 3239. Different conductor constructions and plating available for use up to 200°C.