


GeneralCable  
UL STYLE 3271 #3AWG

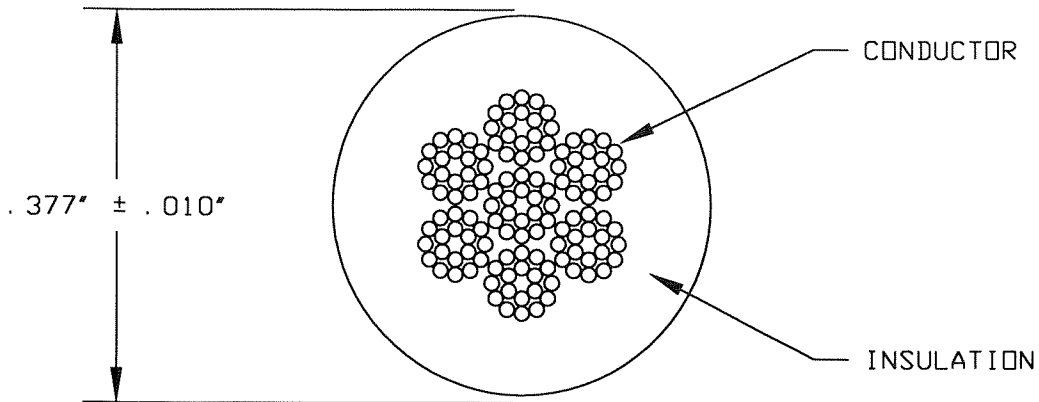

MATERIAL

CONDUCTOR: #3AWG 125/24 ROPE (7X18/24) TINNED COPPER  
INSULATION: XLPE -.046" NOMINAL WALL  
DIAMETER: .377" NOMINAL

REQUIREMENTS

CONDUCTOR DCR: 0.229 OHMS/1000' MAX @ 25°C  
CONDUCTOR DIAMETER: 0.285 NOMINAL (0.289" MAXIMUM)  
UL: STYLE 3271 125°C  
CSA: AWM 125°C  
VOLTAGE RATING: 600V  
WEIGHT: 202 LBS/1000 FT

GeneralCable PART NUMBER

376580.00

PRINT

\*125C 600V 3AWG STYLE 3271 RJ AWM VW-1 GENERAL CABLE (R)  
BRAND REX BRAND (WC) CSA AWM IA 125C 600V FT1\*

APPLICABLE SPECIFICATIONS

UL: STANDARD 758  
CSA: CSA STANDARD C22.2 NO. 210.2

REVISIONS	0	11/05/04	FIRST ISSUE	<p>GeneralCable</p> <p>1600 West Main Street, Willimantic, CT 06226-1128</p> <p><u>The Power of One</u></p>
	A	02/09/07	UPDATE	
REFERENCES	GeneralCable PART 376580.00			DRAWING NO:
	XPO346125-166-BLACK			12-1612
				DRAWN BY: W. DRABEK   APPROVED BY: M. LAJEUNESSE
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable