


REV.	DESCRIPTION	DATE
0	Initial Draft	1/27/2017

General Properties EXAR 150 UL3271 12 AWG Solid Bare Copper

Application Appliance Wiring

General Composition of Cable See Below

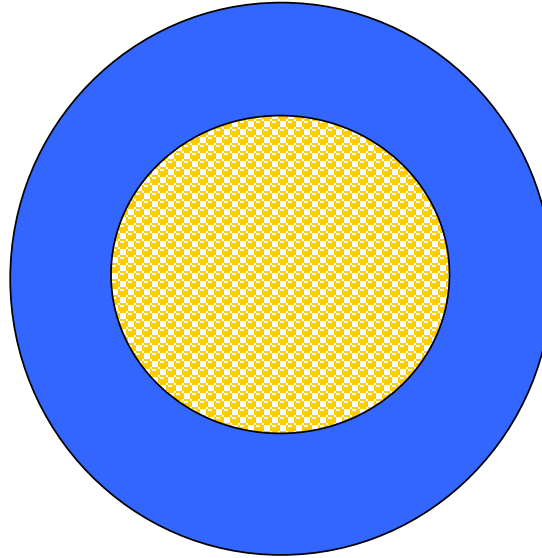

Colors
TBD

Physical Data

Description		Dimensions (Nom.)	
1. Conductor:	12 AWG Solid Bare Copper	inches	mm
2. Insulation:	Exar 150A wall thickness: 30 mil (.030" min wall average.)	0.0808	2.05
	0.8 mm	0.1450	3.68
* PRINT -----	CHAMPLAIN (*) AWM STYLE 3271 125C 600V VW-1 12 awg XXXXX (*)=Underwriters Symbol, XXXXX=Lot Code Info		

Electrical Data

CMA: CMA-6432 Min, 6659 Max.
Voltage Rating: 600 Volts
Temperature Rating:

General Data

Concentricity: 80% min.
Flame Resistance: VW1

Bend Radius: inches mm
0.7 18



TITLE	12AWG Solid BC, Exar 150 UL3271 Lead Wire	
-------	---	--

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS AND TOLERANCES
ARE IN INCHES

DO NOT SCALE THIS DRAWING

DRN.	Steve Blum	DATE	1/27/2017
CKD.		DATE	
SIZE	PART NUMBER	DOCUMENT NUMBER	
A	15-08133-XXX	15902	