


# PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
7/27/2011	F	#13831	SPECIFICATION UPDATED

**Parent Number:** F14043-

**Description:** 14 41/30 TC AWM 3321 or 3505 or 3289  
CL1503 or AWM I A

**DIAMETER:** 0.136  
**TOLERANCE ± :** 0.003

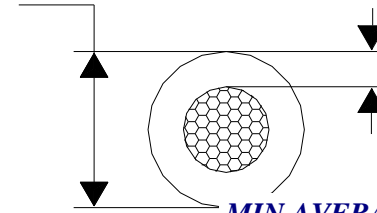

**MIN AVERAGE WALL:** 0.030

**MINIMUM WALL:** 0.027

**Stranding:** 41/30 TC LHL

**Style:** UL: AWM 3321 or 3505 or 3289 CSA: CL1503 or AWM I A

**Insulation:** XLPE

**Print Legend:** 14 AWG (2.08mm<sup>2</sup>) E96824 (PLANT ID CODE) (AWM LOGO) AWM 3289/3321/3505 150C OR 3271 125C 600V AC 750V DC -- 156016 CSA  
CL1503 150C 600V OR AWM I A 150C 600V FT1 -- MADE IN USA

**Voltage:** UL=600Vac 750Vdc

**Temperature:** 150C

**Notes:** 1. Min Temp Rating: -40C

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

**Customer Approval:**

**Customer Part Nbr(s):** \_\_\_\_\_

**Approved By:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Title:** \_\_\_\_\_ **Company Name:** \_\_\_\_\_

**COLEMAN CABLE, INC**

1530 Shields Drive  
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

