


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
7/27/2011	C	#13831	SPECIFICATION UPDATED

Parent Number: F14114-

Description: 14 19/.0147 TC AWM 3321 or 3505 or 3289
CL1503 or AWM I A

DIAMETER: 0.136
TOLERANCE ± : 0.003

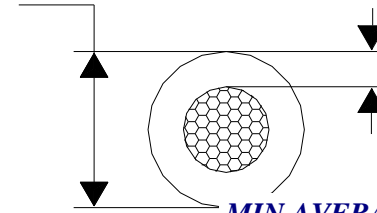

MIN AVERAGE WALL: 0.030

MINIMUM WALL: 0.027

Stranding: 19/.0147 TC LHL

Style: UL: AWM 3321 or 3505 or 3289 CSA: CL1503 or AWM I A

Insulation: XLPE

Print Legend: 14 AWG (2.08mm²) E96824 (PLANT ID CODE) (AWM LOGO) AWM 3289/3321/3505 150C OR 3271 125C 600V AC 750V DC -- 156016 CSA
CL1503 150C 600V OR AWM I A 150C 600V FT1 -- MADE IN USA

Voltage: UL=600Vac 750Vdc, CSA=600V

Temperature: 150C

Notes:

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com



PRODUCT SPECIFICATION


<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
7/9/2009	G	20977	SPECIFICATION UPDATED

Parent Number: F18043-

Description: 18 16/30 BC MTW or AWM
1011/1015/1230/1335 or 1032 TEW or AWM I
A/B

DIAMETER: 0.106

TOLERANCE ±: 0.003

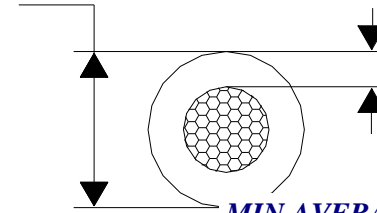

MIN AVERAGE WALL: 0.030

MINIMUM WALL: 0.027

Stranding: 16/30 BC LHL

Style: UL: MTW or AWM 1011/1015/1230/1335 or 1032 CSA: TEW
or AWM I A/B

Insulation: PVC

Print Legend: 18 AWG (0.823mm²) E137733 (PLANT ID CODE) (UL) MTW OR AWM 1011/1015/1230/1335 600V OR 1032 1000V MOISTURE RESISTANT VW-1 -- 156016 CSA TEW 105C 600V FT1 OR AWM I A/B 105C 600V FT1

Voltage: 600V, 1032=1000V

Temperature: 1011=80C, 1015=105C, MTW/1032=90C, 1230: DRY=105C WET=60C, 1335: DRY=90C WET=60C

Notes:

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

