


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
7/17/2013	A		SPECIFICATION CREATED

Parent Number: F4T073-

Description: 4/0 19x108/30 BC AWM 3321 or 3499

DIAMETER: 0.790
TOLERANCE ±: 0.015

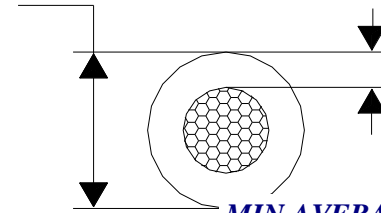

MIN AVERAGE WALL: 0.125

MINIMUM WALL: 0.112

Stranding: 19X108/30 BC Unilay

Style: UL: AWM 3321/3499

Insulation: POE (EPDM)

Print Legend: 4/0 AWG (107.2mm²) E96824 (PLANT ID CODE) (AWM LOGO) STYLE AWM 3321 150C 600V OR AWM 3499 150C 7500V EP VW-1 -- MADE IN USA

Voltage: 600V, 3499 = 7500V

Temperature: 150C (Min Temperature: -40C)

Notes: 1. Heat Seal Poly Separator is used between the copper conductor and insulation.

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

