


PRODUCT SPECIFICATION

| <i>DATE</i> | <i>REV</i> | <i>ECN</i> | <i>DESCRIPTION</i> |
|-------------|------------|------------|-----------------------|
| 9/27/2005 | A | 9919 | SPECIFICATION CREATED |

Parent Number: F06039-

Description: 6 7x12/25 TC AWM 3340 or 3374 CL 1503 or AWM I A/B

DIAMETER: 0.339
TOLERANCE ±: 0.010

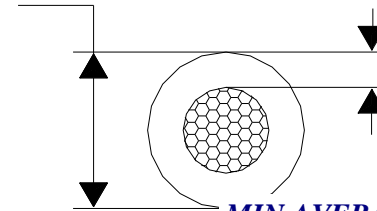

MIN AVERAGE WALL: 0.060

MINIMUM WALL: 0.054

Stranding: 7x12/25 TC Unilay

Style: UL: AWM 3340 or 3374 CSA: CL 1503 or AWM I A/B

Insulation: POE (EPDM)

Print Legend: 6 AWG (13.30mm²) E96824 (PLANT ID CODE) (AWM LOGO) AWM STYLE 3340 OR 3374 125C(FLEX)/150C(NO-FLEX) 600V EP -- 156016 CSA CL1503 150C 600V FT2 OR AWM I A/B 125C 600V FT2 -- MADE IN USA

Voltage: 600V

Temperature: 125C (FLEX)/150C (NO-FLEX)

Notes:

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

