


# PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
9/13/2007	A	18446	SPECIFICATION CREATED

**Parent Number:** F04090-

**Description:** 4 7x60/30 BC AWM 3556 or 3321 CL 1503 or  
AWM I A/B Mylar Separator

**DIAMETER:** 0.392  
**TOLERANCE ±:** 0.010

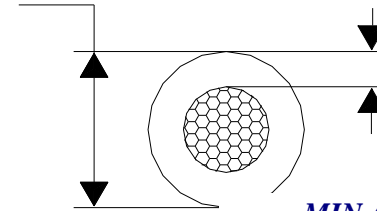

**MIN AVG WALL:** 0.060  
**MINIMUM WALL:** 0.054

**Stranding:** 7x60/30 BC Unilay

**Style:** UL: AWM 3556 or 3321 CSA: CL 1503 or AWM I A/B

**Insulation:** POE

**Print Legend:** 4 AWG (21.15mm<sup>2</sup>) E96824 (PLANT ID CODE) (AWM LOGO) AWM STYLE 3556 OR 3321 150C 600V EP -- 156016 CSA CL1503 150C 600V OR  
AWM I A/B 150C 600V FT2 -- MADE IN USA

**Voltage:** 600V

**Temperature:** 150C

- Notes:**
1. Mylar used as separator between copper conductor & insulation.
  2. Free-Kote applied over insulation

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

**Customer Approval:**

**Customer Part Nbr(s):** \_\_\_\_\_

**Approved By:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Title:** \_\_\_\_\_ **Company Name:** \_\_\_\_\_

**COLEMAN CABLE, INC**

1530 Shields Drive  
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

