




DESC: 24/1 AWM 3693 125C 600V	DWG NO: FAWM241-012	ITEM	SPECS:
SCALE: 50X	DATE: 1/6/12	DR. BY: DPL	NWI P/N: FAWM241-012
CUSTOMER: IEWC	CUSTOMER P/N: 3693/24119-9	A.	24 GAUGE 19x.005TC UNILAY
		B.	20 MILS XLPE INSULATION 125C 600V 18 MILS MIN. WHITE XLPE INSULATION UL RECOGNIZED
			ROHS COMPLIANT MATERIALS USED

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

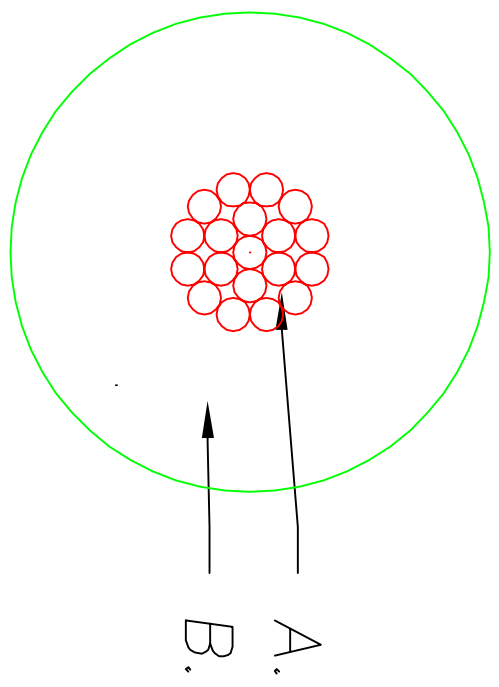

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

LEGEND: NO LEGEND PRINTED ON CABLE ITSELF
RU AWM E54661 STYLE 3693 125C 600V WILL BE PRINTED ON REEL TAG

INITIAL RELEASE	A	1/6/12	DPL		
REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R