SEI IDENTIFICATION SOLUTIONS

MP Cable Sleeves & Sleeving

Standard Grade PVC Cable Sleeves and Sleeving



Product Data

Application Method - Push on / Stretch on

Manufactured from OSM grade PVC, MP Cable Sleeves and Sleeving are economical to use. MP Cable Sleeves and Sleeving are manufactured to meet Military and British Standards.

Self Extinguishing

Economical

Excellent Colour Fastness

Outstanding Electrical Insulation

Available in 11 Colours



MP Cable Sleeves and Sleeving are easy to use and particularly suitable where overall cable diameters have to be kept to a minimum.

APPROVALS & STANDARDS

Certified and issued to: BS 3858 (1965) Type 3 BS 3858 (1992) Type 3 BS 6746 C International RCC Markers DEF STAN 59-15, Type D1a

| PROPERTY | VALUE | | |
|----------------------------|-----------------------------|--|--|
| Temperature Range | -65°C to +70°C | | |
| Colour Fastness | Standard 6 minimum | | |
| Flammability | Self Extinguishing (fitted) | | |
| Chemical Resistance | Good | | |
| Resistance to Mould Growth | BS2011 pt 2.1J | | |
| Insulation Resistance | 10 ¹⁰ ohm cm | | |
| Dielectric Strength | 20kV/mm | | |
| Tensile Strength | 15MPa | | |
| Elongation At Break | 220% | | |





 Siegrist Orel Limited. Hornet Close,
 t
 :
 +44 (0) 1843 865241

 Pysons Road Industrial Estate
 f
 :
 +44 (0) 1843 867180

 Broadstairs Kent CT10 2LQ
 e
 :
 info@siegrist-orel.com


©2015 SEI Identification Solutions Ltd. All rights reserved. The SEI Identification Solutions logo is a registered trademark of SEI Identification Solutions Limited. Other products and brand names may be trademarks of their respective owners. The information on this datasheet is believed to be correct at the time of publishing. Specifications given in this publication are subject to change without notice.

SEI IDENTIFICATION SOLUTIONS

MP Cable Sleeves & Sleeving

Standard Grade PVC Cable Sleeves and Sleeving






MP Cable Sleeves and Sleeving are push fitted or slipped over wires for cable identification.

Approval Standards

Certified and issued to: BS 3858 (1965) Type 3 BS 3858 (1992) Type 3 BS 6746 C International RCC Markers DEF STAN 59-15, Type D1a

| PRODUCT REFERENCE | NOMINAL BORE ID (MM) | NOMINAL WALL THICK (MM) | LENGTH (NESS | COLOUR CODE | FORM |
|----------------------|----------------------------|-------------------------------|-----------------|----------------|-----------------------|
| MP05 | 0.5 | 0.3 | Any length to | BK=Black | Continuous sleeving |
| MP075 | 0.75 | 0.3 | nearest 0.5mm | BN=Brown | Slit Cut |
| MP10 | 1.0 | 0.3 | | RD=Red | Par-O-Cut |
| MP12 | 1.2 | 0.3 | | OR=Orange | Resistor Colour Coded |
| MP15 | 1.5 | 0.3 | | YW=Yellow | Kit Boxes |
| MP20 | 2.0 | 0.3 | | GN=Green | Easy Peel Kit Card |
| MP40 | 4.0 | 0.3 | | BE=Blue | Kit Bags |
| MP75 | 7.5 | 0.5 | | VT=Violet | |
| MP100 | 10.0 | 0.5 | | GY=Grey | |
| MP150 | 15.0 | 0.5 | | WE=White | |
| MP200 | 20.0 | 0.5 | | PK=Pink | |

Ordering Information

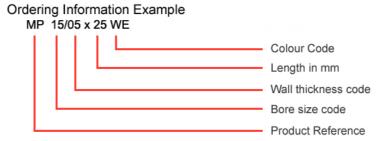

Omit the letter 'P' from code if you require continuous sleeving.

Colour Availability:

Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Grey, White, Pink. Other sizes available on request

 Siegrist Orel Limited. Hornet Close,
 t
 :
 +44 (0) 1843 865241

 Pysons Road Industrial Estate
 f
 :
 +44 (0) 1843 867180

 Broadstairs Kent CT10 2LQ
 e
 :
 info@siegrist-orel.com

©2015 SEI Identification Solutions Ltd. All rights reserved. The SEI Identification Solutions logo is a registered trademark of SEI Identification Solutions Limited. Other products and brand names may be trademarks of their respective owners. The information on this datasheet is believed to be correct at the time of publishing. Specifications given in this publication are subject to change without notice.