



Heyco® Liquid Tight Hole Plugs

Standard 85 Durometer Plugs

- Oil tight, rain tight, submersible.
- UL certified for outdoor applications.
- V0 Flammability rating.
- Install with fingertip pressure (no tool required).
- Multiple nominal sizes fit .500” (12,7 mm) to 1.00” (25,4 mm) true size mounting holes.
- Three trade sizes fit 1/2” to 1” knock-out holes.
- Lock firmly in boxes from .030” (0,8 mm) to .125” (3,2 mm) thick.
- True sizes are UL recognized under Underwriters’ Laboratories File E51579 and CSA certified by Canadian Standard Association File LR008919C.
- Trade sizes are UL listed under Underwriters’ Laboratories File E51579 and CSA certified by Canadian Standard Association File LR081067C.

PANEL DIMENSIONS				PART NO.		DESCRIPTION	UL or SF	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter		Black				A Head Diameter		B Overall Height		C Head Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	
.125	3,2	.500	12,7	3830		KOS-LT 500	UL	.91	23,1	.45	11,4	.29	7,4
		.625	15,9	3834		KOS-LT 625	UL	1.03	26,2	.47	11,9	.31	7,9
		.750	19,1	3831		KOS-LT 750	UL	1.15	29,2	.51	13,0	.35	8,9
		.875	22,2	3833		KOS-LT 1/2	UL	1.23	32,5	.50	13,5	.36	9,1
.125	3,2	1.000	25,4	3832		KOS-LT 1000	UL	1.41	35,8	.56	14,2	.40	10,2
		1.093	27,8	3835		KOS-LT 3/4	UL	1.53	38,6	.55	14,0		
.125	3,2	1.375	34,9	3837		KOS-LT 1	UL	1.80	45,2	.56	14,3	.42	10,7

Available in black color only.




Low 75 Durometer Plugs*

PANEL DIMENSIONS				PART NO.		DESCRIPTION	UL or SF	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter*		Black	Gray			A Head Diameter		B Overall Height		C Head Thickness	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	
.125	3,2	.875	22,2	3833FN	3833FP	KOS-LT 1/2 LD	UL	1.23	32,5	.50	13,5	.36	9,1
		1.093	27,8	3835FN	3835FP	KOS-LT 3/4 LD	UL	1.53	38,6	.55	14,0	.40	10,2
		1.375	34,9	3837FN	3837FP	KOS-LT 1 LD	UL	1.80	45,2	.56	14,3	.42	10,7

Standard colors black and gray.

*Consult Heyco for other Liquid Tight Hole Plug sizes in Low Durometer material.

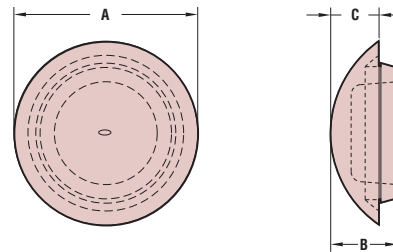

Quick Specs

Material	85 75	Neoprene-Hardness 85 Shore A Neoprene-Hardness 75 Shore A
Certifications	Trade Sizes (1/2, 3/4, 1) True Sizes (all other)	UL Listed under Underwriters’ Laboratories File E28430 SF Certified by Canadian Standard Association File 081067C UL Recognized under Underwriters’ Laboratories File E51579 SF Certified by Canadian Standard Association File 0089118C
Flammability Rating		94V-0