



Heyco® Nytye® Nylon Cable Tie Variations

Push Mount

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS								HEAD STYLE
Max. Tensile Strength	Max. Bundle Diameter	Natural Black		A Length	B Width		Max. Panel Thickness		Mounting Hole Dia.						
Lbs. N	in. mm.			in. mm.	in. mm.	in. mm.	in. mm.	in. mm.	in. mm.						
Tension Wings															
40	178	1.42	36,0	3907N	3907	PWMS-155-HSB	6.23	158	.14	3,5	.13	3,2	.187	4,7	1
50	222	1.57	40,0	13254	13254B	PMT-50-070	7.09	180	.19	4,8	.09	2,4	.187	4,7	2
		1.75	44,5	3904	3905	PMT 150	8.00	203	.19	4,8	.13	3,2	.250	6,4	1
Tension Wings, Standoff, Releasable*															
40	178	1.38	35,0	13267	13267B	PMST-40-068-197	6.69	170	.51	13,0	.08	2,0	.197	5,0	3
		1.25	31,8	13268	13268B	PMST-40-066-187	6.81	173	.78	19,8	.08	2,0	.187	4,7	
Cupped Base, Standoff, Releasable*															
30	133	1.25	31,8	13273	13273B	PMRS-30-066	6.63	168	.53	13,5	.023 - .098	0,6 - 2,5	.236 - .255	6,0 - 6,5	4


Standard color natural. Consult Heyco for UV Black (at extra charge).

*Width is .14" (3,6 mm)


Other Variations

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS					
Max. Tensile Strength	Max. Bundle Diameter	Natural Black		A Length	B Width		A Length	B Width				
Lbs. N	in. mm.			in. mm.	in. mm.	in. mm.	in. mm.					
Low Profile												
65	289	5.91	150	13294		NTLP-65-097	19.68	500	.35	9,0		
Releasable												
40	178	1.38	35,0	13297	13297B	RNT-40-059	5.94	151	.14	3,5		
50	222	1.97	50,0	13301	13301B	RNT-50-079	7.95	202	.18	4,5		
100	444	2.87	73,0	13302	13302B	RNT-100-098	9.84	250	.30	7,5		
Screw Mount												
18	80	.87	22,0	13307	-	MNT-18-044	4.41	112	.10	2,5	#4 screw	
30	133	1.00	25,4	3550	-	MNT 90	5.50	140	.12	2,9		
40	178	1.25	31,8	3555	-	MNT 120	6.50	165	.14	3,6	#8 screw	
		1.38	35,0	13308	-	MNT-40-067	6.69	170				
50	222	1.75	44,4	3560	-	MNT 150	8.00	203	.19	4,8	#10 screw	
		1.97	50,0	13309	-	MNT-50-086	8.66	220				.17
Identification												
18	80	.87	22,0	13316	-	NTID-18-039	3.94	100	.10	2,5	Marking Area W x L (in, mm) .31 8,0 1.00 25,4	


Standard color natural. Consult Heyco for UV Black (at extra charge).

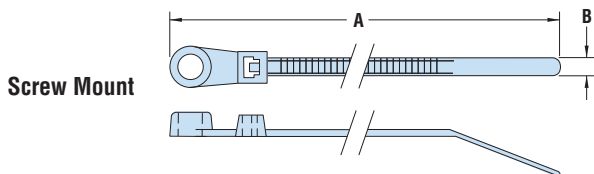


Material	Nylon 6/6
Certifications	Recognized under Underwriters' Laboratories File E54523 (Screw Mount Nytyes only)
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)




Style 1




Style 2




Style 3

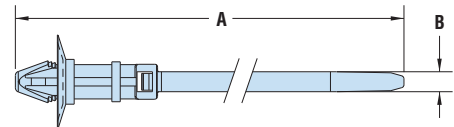


Style 4



13294



RNT Series



13316