


Item # 39702, Type NMUA - Nonconductive Conduit Liquid-Tight Flexible Non-Metallic Conduit (LFNC)

Thermoplastic PVC

Conduit shall be Anaconda SEALTITE® Type NMUA. Conduit shall be constructed of non-metallic PVC material and shall be used for inside, outside and corrosive applications in accordance with Article 356 of the National Electric Code. Conduit shall be used in applications requiring a temperature range of -17°F to +176°F (-27°C to +80°C) for dry locations. Conduit shall be UL listed and CSA certified as Type "B" non-metallic conduit. Conduit IP 67 rated when installed with approved

[+ more](#)

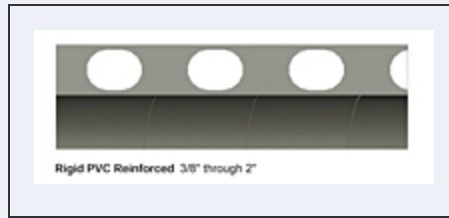

[Specifications](#) | [Installation](#) | [NEC Articles](#) | [Application](#)

Specifications

Type	NMUA
Electrical Trade Size	3/8 in 12 mm
Length	100 ft 30.48 m
Packaging	Standard Carton
Inside Diameter	0.484 to 0.504 in 12.294 to 12.802 mm
Outside Diameter	0.690 to 0.710 in 17.526 to 18.034 mm
Approx. Inside Bend Radius	2.0 in 50.8 mm

Approx. Weight per 100 ft13 lbs
5.90 kg**Color**

GRAY

Certifications

RoHS WEEE

UL Listed & CSA Certified

Cross-Reference #55-09-41-01
6001-30-00
81001
LFNC-B
NM
NM-10
NMUA
NMUA-3/8**Installation**

- Conduit used with standard connectors for non-metallic conduit **Type B** for easy installation. IP 67 Rated when installed with approved connectors.
- Approved for both exposed and concealed locations. Rated for temperature ranges of -17°F to +176°F (-27°C to +80°C).
- Complies with NEC Article 356 and UL Standard 1660 File No. E-211327; CSA C22.2 File No. 020817.
- Easy to install and cuts easily.
- Manufactured in a full range of trade sizes from 3/8" through 2".
- Approved for direct burial and in concrete trade sizes 3/8" through 2".

NEC Articles

- Article 250.102 Equipment Bonding Jumpers
- Article 250.134 (B) Equipment Grounding
- Article 300.22 (D) Information Technology Equipment
- Article 356 Liquid-Tight Flexible Nonmetallic Conduit (LFNC-B)
- Article 501.10 (B) (2) Class I Div. 2
- Article 502.10 (A) (2) and (B) (2) Class II Div. 1 & 2
- Article 503.10 (A) (3) and (B) Class III Div. 1 & 2
- Article 620.21 Elevator Wiring Methods
- Article 645.5 (E) (2) Under Raised Floors

Application

General Purpose Non-Metallic-Smooth Inner/Outer Wall
Temperature Range: of -17°F to +176°F (-27°C to +80°C).

