
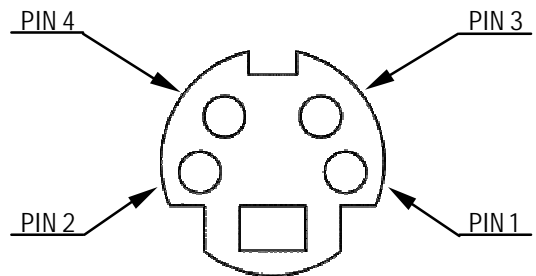


S-VIDEO Y/C 2 CONDUCTOR 26(7) AWG SPIRAL SHIELD BLACK JACKET

403000
DRAWING NO.

Part No.	403000
CONDUCTOR	26 awg (7 x 34) Tinned Copper
CONDUCTOR RESISTANCE	41 Ohms/Mft (135 Ohms/km)
INSULATION	Natural Foamed Polyolefin O.D.: 0.075" (1.91 mm) +/- 0.002"
SPIRAL SHIELD	36 awg Tinned Copper, 95% Coverage Min.
INNER JACKETS	0.010" (0.25 mm) White & Yellow Polyvinylchloride (PVC)
OVERALL COAX DIAMETER	0.104" (2.64 mm) +/- 0.005" (0.13 mm)
CABLE CONSTRUCTION	2 Coaxes Pulled in Parallel
OVERALL JACKET	0.024" (0.61 mm) Matte Black Polyvinylchloride (PVC)
OVERALL CABLE DIAMETER	0.256" (6.50 mm) + 0.003" / - 0.005"
IMPEDANCE	75 Ohms Nominal
CAPACITANCE	18.7 pF/ft (61.4 pF/m)
TIME DELAY	1.31 ns/ft
VELOCITY OF PROPAGATION	78%
PRINT	"CLARITY" BY DELCO WIRE #403000 S-VIDEO 2 COND 26 AWG Sequential Footage Markings at 1 Foot Intervals

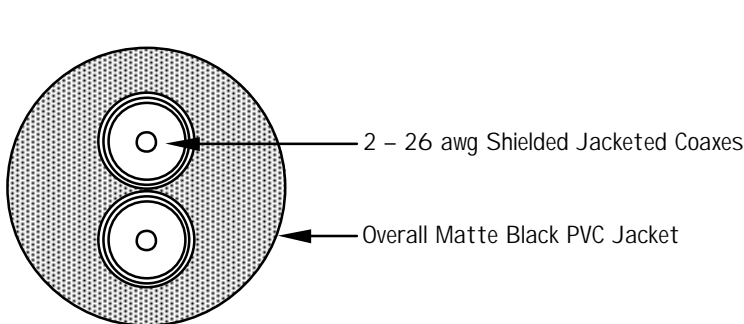

SOLDER SIDE VIEW

- 1) White (chrominance) Centre to PIN 4 Shield to PIN 2
- 2) Yellow (luminance) Centre to PIN 3 Shield to PIN 1

ALL DIMENSIONS NOMINAL UNLESS SPECIFIED

REVISION	APPD	DATE



DELCO WIRE AND CABLE LIMITED
1 Saramia Crescent Concord, Ontario L4K 3S6

		DATE
DRWN	CM	05/14/03
CHKD		
APPD		