




PoleonFit T: Polyamide - IP 67				
Part Numbers -40°F to 248°F (-40°C to 120°C)	Fits to Conduit Size	Fits to Poleon DN	Dimens. in In. (mm)	
			H Height	L Length
				
PFT10	DN10	10	.20 (5)	.83 (21.2)
PFT12	DN12	12	.22 (5.5)	.87 (22.3)
PFT17	DN17	17	.26 (6.5)	1.10 (28)
PFT23	DN23	23	.26 (6.5)	1.43 (36.4)
PFT29	DN29	29	.26 (6.5)	1.70 (43)




- **Combination of Strain Relief & Conduit Fittings**
- **Push-in system**
- **Rotatable**
- **Can be equipped with Multi-Hole inserts**
- **Metal style can be changed to EMI/RFI**
- **Metal Style also available in ATEX**




The DUO is an integrated Strain Relief / Conduit solution.

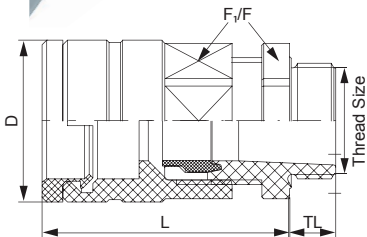

 Suggested Clearance Hole for Non-Threaded Mounting $+0.01"$ ($+0.25\text{mm}$)

 Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.

PoleonFit DUO-PA: Straight - Nylon									
Part Numbers -40°F to 212°F (-40°C to 100°C)	Cable Range Inches (mm)	Thread Type & Size	Fits Nominal Conduit Size	Dimensions in Inches (mm)					
				A Clearance Hole $+0.01"$ ($+0.25\text{mm}$)	TL Thread Length	L Body Length	D Outer Diameter	F _i /F Wrench Flat	
									
DUO11AA-BK	.20 - .39 (5-10)	PG 11	10	.73 (18.5)	.31 (8)	1.57 (40)	.91 (23)	.87 (22)	
DUO11AR-BK	.12 - .28 (3-7)								
DUO13AA-BK	.24 - .47 (6-12)	PG 13/13.5	12	.80 (20.3)	.35 (9)	1.73 (44)	.98 (25)	.94 (24)	
DUO13AR-BK	.20 - .35 (5-9)								
DUO16AA-BK	.39 - .55 (10-14)	PG 16	14	.89 (22.5)	.39 (10)	1.85 (47)	1.14 (29)	1.06 (27)	
DUO16AR-BK	.28 - .47 (7-12)								
DUO21AA-BK	.51 - .63 (13-16)	PG 21	17	1.12 (28.4)	.43 (11)	1.97 (50)	1.18 (30)	1.30 (33)	
DUO21AR-BK	.35 - .63 (9-16)								
DUO29AA-BK	.71 - .87 (18-22)	PG 29	23	1.47 (37.3)	.43 (11)	2.36 (60)	1.54 (39)	1.65 (42)	
DUO29AR-BK	.51 - .79 (13-20)								
DUO36AA-BK	.87 - 1.10 (22-28)	PG 36	29	1.85 (47)	.51 (13)	2.72 (69)	1.77 (45)	2.09 (53)	
DUO36AR-BK	.79 - 1.02 (20-26)								
DUO42AA-BK	1.26 - 1.42 (32-36)	PG 42	37	2.13 (54.1)	.51 (13)	2.91 (74)	2.05 (52)	2.36 (60)	
DUO42AR-BK	.98 - 1.22 (25-31)								
DUO48AA-BK	1.46 - 1.73 (37-44)	PG 48	50	2.34 (59.4)	.63 (14)	3.11 (79)	2.05 (52)	2.67 (68)	
DUO48AR-BK	1.14 - 1.38 (29-35)								
DUO16MA-BK	.20 - .39 (5-10)	M16 x 1.5	10	.63 (16)	.31 (8)	1.57 (40)	.91 (23)	.86 (22)	
DUO16MR-BK	.12 - .28 (3-7)								
DUO20MA-BK	.24 - .47 (6-12)	M20 x 1.5	12	.79 (20)	.39 (10)	1.73 (44)	.98 (25)	.94 (24)	
DUO20MR-BK	.20 - .35 (5-9)								
DUO22MA-BK	.39 - .55 (10-14)	M20 x 1.5	14	.79 (20)	.39 (10)	1.81 (46)	1.14 (29)	1.06 (27)	
DUO22MR-BK	.28 - .47 (7-12)								
DUO25MA-BK	.51 - .71 (13-18)	M25 x 1.5	17	.98 (25)	.43 (11)	1.97 (50)	1.18 (30)	1.30 (33)	
DUO25MR-BK	.35 - .63 (9-16)								
DUO32MA-BK	.71 - .87 (18-22)	M32 x 1.5	23	1.26 (32)	.43 (11)	2.36 (60)	1.54 (39)	1.65 (42)	
DUO32MR-BK	.51 - .79 (13-20)								
DUO40MA-BK	.87 - 1.10 (22-28)	M40 x 1.5	29	1.57 (40)	.51 (13)	2.72 (69)	1.77 (45)	2.08 (53)	
DUO40MR-BK	.79 - 1.02 (20-26)								
DUO50MA-BK	1.26 - 1.42 (32-36)	M50 x 1.5	37	1.97 (50)	.51 (13)	2.91 (74)	2.05 (52)	2.36 (60)	
DUO50MR-BK	.98 - 1.22 (25-31)								
DUO63MA-BK	1.46 - 1.73 (37-44)	M63 x 1.5	50	2.48 (63)	.63 (14)	3.11 (79)	2.05 (52)	2.67 (68)	
DUO63MR-BK	1.14 - 1.38 (29-35)								
DUO16NA-BK	.39 - .55 (10 - 14)	NPT 1/2"	14	.83 (21.1)	.51 (13)	1.81 (46)	1.15 (29)	1.06 (27)	
DUO16NR-BK	.28 - .47 (7 - 12)								
DUO21NA-BK	.51 - .71 (13 - 18)	NPT 3/4"	17	1.05 (26.7)	.63 (14)	1.97 (50)	1.18 (30)	1.30 (33)	
DUO21NR-BK	.35 - .63 (9 - 16)								
DUO29NA-BK	.71 - .87 (18 - 24)	NPT 1"	23	1.35 (34.3)	.75 (19)	2.36 (60)	1.53 (39)	1.65 (42)	
DUO29NR-BK	.51 - .79 (13 - 20)								
DUO36NA-BK	.87 - 1.10 (22 - 31)	NPT 1-1/2"	29	1.92 (48.7)	.79 (20)	2.72 (69)	1.77 (45)	2.08 (53)	