


PoleonFit DUO-Ms: Straight - Nickel Plated Brass

Part Numbers	Cable Range Inches (mm)	Thread Type & Size	Fits Nominal Conduit Size	Dimensions in Inches (mm)				
				A	TL	L	D	F _i /F
				Clearance Hole +.01" (+.25 mm)	Thread Length	Body Length	Outer Diameter	Wrench Flat
DUO11AA-BR	.20 - .39 (5-10)	PG 11	10	.73 (18.5)	.24 (6)	1.42 (36)	.91 (23)	20/20
DUO11AR-BR	.12 - .28 (3-7)							
DUO13AA-BR	.24 - .47 (6-12)	PG 13/13.5	12	.80 (20.3)	.26 (6.5)	1.56 (39.5)	.98 (25)	24/22
DUO13AR-BR	.20 - .35 (5-9)							
DUO16AA-BR	.39 - .55 (10-14)	PG 16	14	.89 (22.5)	.26 (6.5)	1.60 (40.5)	1.14 (29)	28/24
DUO16AR-BR	.28 - .47 (7-12)							
DUO21AA-BR	.51 - .63 (13-16)	PG 21	17	1.12 (28.4)	.28 (7)	1.75 (44.5)	1.18 (30)	30/30
DUO21AR-BR	.35 - .63 (9-16)							
DUO29AA-BR	.71 - .87 (18-22)	PG 29	23	1.47 (37.3)	.31 (8)	1.99 (50.5)	1.54 (39)	40/40
DUO29AR-BR	.51 - .79 (13-20)							
DUO36AA-BR	.87 - 1.10 (22-28)	PG 36	29	1.85 (47)	.31 (8)	2.22 (56.5)	1.77 (45)	50/50
DUO36AR-BR	.79 - 1.02 (20-26)							
DUO42AA-BR	1.26 - 1.42 (32-36)	PG42	37	2.13 (54.1)	.35 (9)	2.26 (57.5)	2.05 (52)	57/57
DUO42AR-BR	.98 - 1.22 (25-31)							
DUO48AA-BR	1.46 - 1.73 (37-44)	PG 48	50	2.34 (59.4)	.39 (10)	2.38 (60.5)	2.05 (52)	64/64
DUO48AR-BR	1.14 - 1.38 (13-20)							
DUO16MA-BR	.20 - .39 (5-10)	M16 X 1.5	10	.63 (16)	.24 (6)	1.42 (36)	.91 (23)	20/20
DUO16MR-BR	.12 - .28 (3-7)	M20 X 1.5	12	.79 (20)	.24 (6)	1.56 (39.5)	.98 (25)	24/22
DUO20MA-BR	.39 - .55 (10-14)							
DUO20MR-BR	.28 - .47 (7-12)	M20 X 1.5	14	.79 (20)	.24 (6)	1.60 (40.5)	1.14 (29)	28/24
DUO22MA-BR	.39 - .55 (10-14)							
DUO22MR-BR	.28 - .47 (7-12)	M25 X 1.5	17	.98 (25)	.28 (7)	1.75 (44.5)	1.18 (30)	30/30
DUO25MA-BR	.51 - .71 (13-18)							
DUO25MR-BR	.35 - .63 (9-16)	M32 X 1.5	23	1.26 (32)	.31 (8)	1.99 (50.5)	1.54 (39)	40/40
DUO32MA-BR	.71 - .87 (18-22)							
DUO32MR-BR	.51 - .79 (13-20)	M40 X 1.5	29	1.57 (40)	.31 (8)	2.22 (56.5)	1.77 (45)	50/50
DUO40MA-BR	.87 - 1.22 (22-31)							
DUO40MR-BR	.79 - 1.02 (20-26)	M50 X 1.5	37	1.97 (50)	.35 (9)	2.26 (57.5)	2.05 (52)	57/57
DUO50MA-BR	1.26 - 1.42 (32-36)							
DUO50MR-BR	.98 - 1.22 (25-31)	M63 X 1.5	50	2.48 (63)	.39 (10)	2.38 (60.5)	2.05 (52)	64/64
DUO63MA-BR	1.46 - 1.73 (37-44)							
DUO63MR-BR	1.14 - 1.38 (29-35)							
DUO16NA-BR	.39 - .55 (10-14)	NPT 1/2"	14	.83 (21.1)	.51 (13)	1.81 (40.5)	1.14 (29)	28/24
DUO16NR-BR	.28 - .47 (7-12)							
DUO21NA-BR	.51 - .71 (13-18)	NPT 3/4"	17	1.05 (26.7)	.51 (13)	1.97 (44.5)	1.18 (30)	30/30
DUO21NR-BR	.35 - .63 (9-16)							
DUO29NA-BR	.71 - .87 (18-24)	NPT 1"	23	1.35 (34.3)	.63 (19)	2.36 (50.5)	1.54 (39)	40/23
DUO29NR-BR	.51 - .71 (13-20)							




Also available in NPT and Elongated Threads.

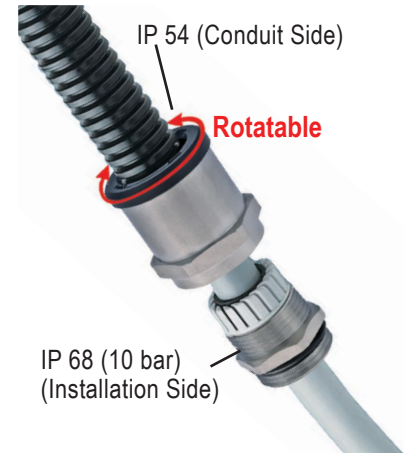

Metal style comes with O-Ring.

Suggested Clearance Hole for Non-Threaded mounting +.01" (+.25mm).

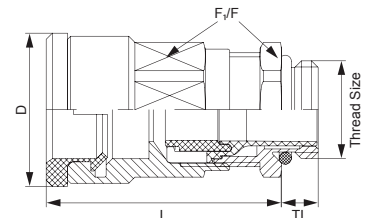

Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.

For Material Specifications and Approval Information refer to page 52.

Dome Fittings also available with the following approvals:



www.SealconEX.com