Slim 5 Series



Versatile Rack Frame System Satisfies Many Design Requirements

Structural Features

• Standard front and rear fixed heavy-gauge, 10-32 threaded rackrail with marked rackspace increments to speed equipment mounting

with steel side panels

- Bolt-together design allows for flat shipment via UPS
- Unique mechanically interlocking corner joint is central to each unit's exceptional strength and eases assembly
- 1/2" and 3/4" top and bottom electrical knockouts in rear of rack for cable pass-through
- Optional removable steel side panels provide security while attractive thermolaminate top and side panel options provide aesthetic appeal for home and studio installations
- Specify a Slim 5 when multiple racks need to be joined or when open sides are desirable

Thermal Management

Top includes two laser knockout locations to mount cooling fans

Regulatory / Certifications

- Static load capacity 1,000 lbs.
- UL Listed in the US and Canada. UL Listed load capacity 400 lbs.
- GREENGUARD Indoor Air Quality Certified for Children and Schools (the most strict level)

20" Useable Depth Part #	26" Useable Depth Part #	Racking Height	Overall Height	Recommended Power•
5-8	5-8-26	14" (8 space)	17-3/4"	<mark>C</mark> **
5-14	5-14-26	24-1/2" (14 space)	28-1/4"	<mark>C</mark> *
5-21	5-21-26	36-3/4" (21 space)	40-1/2"	EG*
5-29	5-29-26	50-3/4" (29 space)	54-1/2"	EGJ *
5-37	5-37-26	64-3/4" (37 space)	68-1/2"	GJN*
5-43	5-43-26	75-1/4" (43 space)	79"	NPT*
•for more info refer to pgs	. 96-117 *Requires PB-5A to	**Requires PB-XS	to mount power strip	

Slim 5 ships flat packed

panels and plexiglass front door

HOT TIP! Slim 5 frames can be ordered in any height between 8 and 43 spaces part # 5-x (x = spaces)

(NOTE: Doors and side panels may not be available in matching size)

m


middleatlantic.com • V: 800-266-7225 • F: 800-392-3955

Slim 5 Series

Casters (add 3-7/8" to overall cabinet height)



Accessories

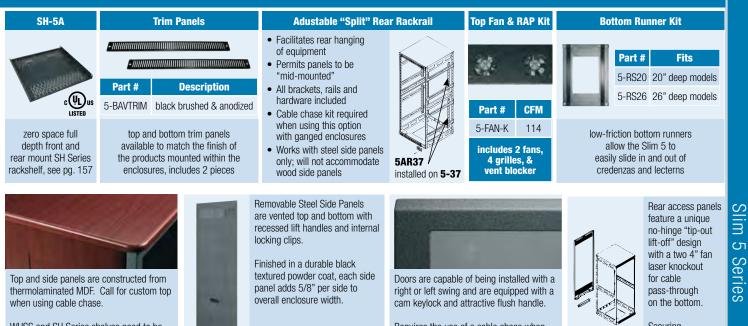

WUSS and SH Series shelves need to be installed prior to installation of wood side panels, which conveniently lift off.

Requires the use of a cable chase when used in multi-bay installations. Doors provide 1-1/2" clearance.

Securing kevlock included. Slim

СЛ

Part #	Solid Front Door	Plexi Front Door	Steel Side Panels, Pair	Thermolaminate Top/Side Panels**	Rear Access Panel	Adjustable "Split" Rear Rackrail	Cable Chase 3" Wide*
5-8	D0-5-8	DOP-5-8	SP-5-8	-	RAP8	5AR8	5CC8
5-14	D0-5-14	DOP-5-14	SP-5-14	TSP-5-14xx	RAP14	5AR14	5CC14
5-21	D0-5-21	DOP-5-21	SP-5-21	TSP-5-21xx	RAP21	5AR21	5CC21
5-29	D0-5-29	DOP-5-29	SP-5-29	TSP-5-29xx	RAP29	5AR29	5CC29
5-37	D0-5-37	DOP-5-37	SP-5-37	TSP-5-37xx	RAP37	5AR37	5CC37
5-43	D0-5-43	DOP-5-43	SP-5-43	TSP-5-43xx	RAP43	5AR43	5CC43
5-8-26	D0-5-8	DOP-5-8	SP-5-8-26	-	RAP8	5AR8-26	5CC8-26
5-14-26	D0-5-14	DOP-5-14	SP-5-14-26	TSP-5-14-26xx	RAP14	5AR14-26	5CC14-26
5-21-26	D0-5-21	DOP-5-21	SP-5-21-26	TSP-5-21-26xx	RAP21	5AR21-26	5CC21-26
5-29-26	D0-5-29	DOP-5-29	SP-5-29-26	TSP-5-29-26xx	RAP29	5AR29-26	5CC29-26
5-37-26	D0-5-37	DOP-5-37	SP-5-37-26	TSP-5-37-26xx	RAP37	5AR37-26	5CC37-26
5-43-26	D0-5-43	DOP-5-43	SP-5-43-26	TSP-5-43-26xx	RAP43	5AR43-26	5CC43-26

*Custom width cable chases available, please call for details. ***Replace 'xx' with DS = Darkstone, GS = Graystone, PS = Pepperstone (Tops Only), SL = Slate (Sides Only) SG = Shark Gray, EA = Ebony Ash, WG = Wenge, DC = Dark Cherry, DP = Dark Pecan, AG = Aged Cherry, HM = Honey Maple, LW = Light Walnut, MP = Maple. See pg. 175 for thermolaminate finish options.