V-System™ Compatible Mounting Accessories

EGR enclosures feature V-System-ready sides with small laser knockout holes on a 5-1/4" grid. V-System brackets and accessories use the grid to provide highly flexible mounting options for large and small AV components, power strips, cabling, and even rackrail. Brackets can be used in any combination, vertically or horizontally, to meet the needs of installers.

V-System accessory brackets provide mounting points for equipment and other system elements such as rackrail and lacer bars. Models are available in fixed and slotted hole patterns, and with various standoffs, for flexibility. Here are some examples:

V-System sub-plates bridge the mounting grid to provide wider mounting surfaces and feature a versatile mounting pattern.

Cable Manager Brackets (6)	Cable Tie Points (15)	8" Cable/Wire Management Ties with Mounting Studs (12)	Pair of Accessory Brackets	Pair of Telescoping Accessory Brackets	Rackrail Brackets (4)	Aluminum Mounting Plate	L-Brackets	Pair of Pull Handles	4 Pack of Gland Grommets	Vent Blocker Kit
CMB-6	CTP-15	TW12-S	EGR-ACCB	EGR-ACCB-T	EGR-RRB	EGR-SUB	LBKT-1.5 (2)	EGR-HDL	GK-3G	VBK-P28
							LBKT-1.5-8 (8)		GK-1X7G	
							LBKT-2.5 (2)			
							LBKT-2.5-8 (8)			

Part #	3" Front or Rear Extender	Cable Entry Rear Door	Solid Front Door	Vented Front Door	Plexi Front Door	Rear Rail Kit (Pair)
EGR-4428	EGR-44-EXT3	EGR-RDC44	FD-44	LVFD-44	PFD-44	EGR-RR44
EGR-4028	EGR-40-EXT3	EGR-RDC40	FD-40	LVFD-40	PFD-40	EGR-RR40
EGR-3528	_	EGR-RDC35	FD-35	LVFD-35	PFD-35	EGR-RR35
EGR-2428	_	EGR-RDC24	FD-24	LVFD-24	PFD-24	EGR-RR24
EGR-2128	_	EGR-RDC21	FD-21	LVFD-21	PFD-21	EGR-RR21

Fan Top Options		Rear Door Options		Base Options			Furniture Top Options	Additional Options	
3 Space Panel w/ Two 69 CFM Fans	3 Space Panel w/ Two 69 CFM Fans and Proportional Speed Thermostatic Controller	Fan Kit for EGR Rear Door (Two 69 CFM Fans)	Fan Kit for Rear Door w/ Controller (Two 69 CFM Fans)	Skirted Caster Base (adds 4")	Inner Platform Base	Solid Base w/ LKO	1, 2, or 3 Bay Thermolaminate Top	Chassis Support Angles	Wrinkle Powder Coat Finish Blank Panels
EFP-2DC	EFP-2DC-FC	FAN2-DC	FAN2-DC-FC	CBS-EGR-28	BS-EGR-28	SBS-EGR-28	EGR-T1-28*	EGR-CSA-28	WSB1 (1 space)
_	_	_	_	_	_	_	EGR-T2-28*	_	WSB2 (2 space)
_	_	_	_	_	_	_	EGR-T3-28*	_	WSB3 (3 space)
_	_	_	_	_	_	_	_	_	WSB4 (4 space)

*Custom tops available call for details. Replace 'xx' with AG = Aged Cherry, DC = Dark Cherry, DP = Dark Pecan, DS = Darkstone, EA = Ebony Ash, GS = Graystone, PS = Pepperstone, HM = Honey Maple, LW = Light Walnut, MP = Maple, SG = Shark Gray, WG = Wenge.
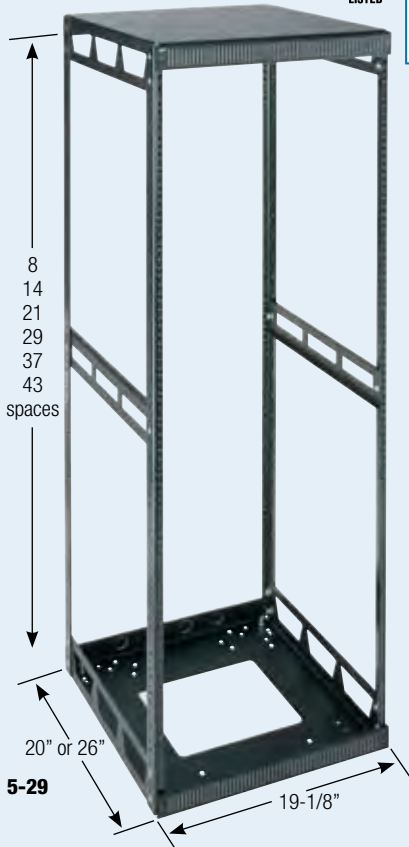
GREENGUARD Indoor Air Quality Certified · RoHS · **EIA/TIA Compliant** · c(UL)us LISTED · **Spec. # 96-037 for full product info.** A&E

8
14
21
29
37
43
spaces

20" or 26"
5-29
19-1/8"

5-29
26" deep Slim 5 shown with steel side panels

5-29
shown with dark cherry side and top panels and plexiglass front door

Versatile Rack Frame System Satisfies Many Design Requirements

Structural Features
- Standard front and rear fixed heavy-gauge, 10-32 threaded rackrail with marked rackspace increments to speed equipment mounting
- Bolt-together design allows for flat shipment via UPS
- Unique mechanically interlocking corner joint is central to each unit's exceptional strength and eases assembly
- 1/2" and 3/4" top and bottom electrical knockouts in rear of rack for cable pass-through
- Optional removable steel side panels provide security while attractive thermolaminate top and side panel options provide aesthetic appeal for home and studio installations
- Specify a Slim 5 when multiple racks need to be joined or when open sides are desirable

Thermal Management
- Top includes two laser knockout locations to mount cooling fans

Regulatory / Certifications
- Static load capacity - 1,000 lbs.
- UL Listed in the US and Canada. UL Listed load capacity - 400 lbs.
- GREENGUARD Indoor Air Quality Certified for Children and Schools (the most strict level)

Slim 5 ships flat packed

20" Useable Depth Part #	26" Useable Depth Part #	Racking Height	Overall Height	Recommended Power•
5-8	5-8-26	14" (8 space)	17-3/4"	C **
5-14	5-14-26	24-1/2" (14 space)	28-1/4"	C *
5-21	5-21-26	36-3/4" (21 space)	40-1/2"	E G *
5-29	5-29-26	50-3/4" (29 space)	54-1/2"	E G J *
5-37	5-37-26	64-3/4" (37 space)	68-1/2"	G J N *
5-43	5-43-26	75-1/4" (43 space)	79"	N P T *

•for more info refer to pgs. 96-117 *Requires PB-5A to mount power strip **Requires PB-XS to mount power strip

HOT TIP!
Slim 5 frames can be ordered in any height between 8 and 43 spaces part # 5-x (x = spaces)

(NOTE: Doors and side panels may not be available in matching size)

Casters (add 3-7/8" to overall cabinet height)

| 5W	5WR	5WL	5WLR	CBS-5	CBS-5R
set of 4 commercial grade casters	set of 4 fine floor casters	set of 4 commercial grade locking casters	set of 4 fine floor locking casters	skirted base with 4 commercial grade non-locking casters, fits 20" depth models; CBS-5-26 fits 26" depth models	skirted base with 4 fine floor non-locking casters, fits 20" depth models; CBS-5-26R fits 26" depth models

Accessories

SH-5A

C UL US LISTED

zero space full depth front and rear mount SH Series rackshelf, see pg. 157

Trim Panels

Part #	Description
5-BAVTRIM	black brushed & anodized

top and bottom trim panels available to match the finish of the products mounted within the enclosures, includes 2 pieces

Adustable "Split" Rear Rackrail

- Facilitates rear hanging of equipment
- Permits panels to be "mid-mounted"
- All brackets, rails and hardware included
- Cable chase kit required when using this option with ganged enclosures
- Works with steel side panels only; will not accommodate wood side panels

5AR37 installed on **5-37**

Top Fan & RAP Kit

Part #	CFM
5-FAN-K	114

includes 2 fans, 4 grilles, & vent blocker

Bottom Runner Kit

Part #	Fits
5-RS20	20" deep models
5-RS26	26" deep models

low-friction bottom runners allow the Slim 5 to easily slide in and out of credenzas and lecterns

Top and side panels are constructed from thermolaminated MDF. Call for custom top when using cable chase.

WUSS and SH Series shelves need to be installed prior to installation of wood side panels, which conveniently lift off.

Removable Steel Side Panels are vented top and bottom with recessed lift handles and internal locking clips.

Finished in a durable black textured powder coat, each side panel adds 5/8" per side to overall enclosure width.

Doors are capable of being installed with a right or left swing and are equipped with a cam keylock and attractive flush handle.

Requires the use of a cable chase when used in multi-bay installations. Doors provide 1-1/2" clearance.

Rear access panels feature a unique no-hinge "tip-out lift-off" design with a two 4" fan laser knockout for cable pass-through on the bottom.

Securing keylock included.

Slim 5 Series

Part #	Solid Front Door	Plexi Front Door	Steel Side Panels, Pair	Thermolaminate Top/Side Panels**	Rear Access Panel	Adjustable "Split" Rear Rackrail	Cable Chase 3" Wide*
5-8	DO-5-8	DOP-5-8	SP-5-8	–	RAP8	5AR8	5CC8
5-14	DO-5-14	DOP-5-14	SP-5-14	TSP-5-14xx	RAP14	5AR14	5CC14
5-21	DO-5-21	DOP-5-21	SP-5-21	TSP-5-21xx	RAP21	5AR21	5CC21
5-29	DO-5-29	DOP-5-29	SP-5-29	TSP-5-29xx	RAP29	5AR29	5CC29
5-37	DO-5-37	DOP-5-37	SP-5-37	TSP-5-37xx	RAP37	5AR37	5CC37
5-43	DO-5-43	DOP-5-43	SP-5-43	TSP-5-43xx	RAP43	5AR43	5CC43
5-8-26	DO-5-8	DOP-5-8	SP-5-8-26	–	RAP8	5AR8-26	5CC8-26
5-14-26	DO-5-14	DOP-5-14	SP-5-14-26	TSP-5-14-26xx	RAP14	5AR14-26	5CC14-26
5-21-26	DO-5-21	DOP-5-21	SP-5-21-26	TSP-5-21-26xx	RAP21	5AR21-26	5CC21-26
5-29-26	DO-5-29	DOP-5-29	SP-5-29-26	TSP-5-29-26xx	RAP29	5AR29-26	5CC29-26
5-37-26	DO-5-37	DOP-5-37	SP-5-37-26	TSP-5-37-26xx	RAP37	5AR37-26	5CC37-26
5-43-26	DO-5-43	DOP-5-43	SP-5-43-26	TSP-5-43-26xx	RAP43	5AR43-26	5CC43-26

*Custom width cable chases available, please call for details. ***Replace 'xx' with DS = Darkstone, GS = Graystone, PS = Pepperstone (Tops Only), SL = Slate (Sides Only)
SG = Shark Gray, EA = Ebony Ash, WG = Wenge, DC = Dark Cherry, DP = Dark Pecan, AG = Aged Cherry, HM = Honey Maple, LW = Light Walnut, MP = Maple.
See pg. 175 for thermolaminate finish options.