


Smart Choices

for the Oil and
Gas Industry

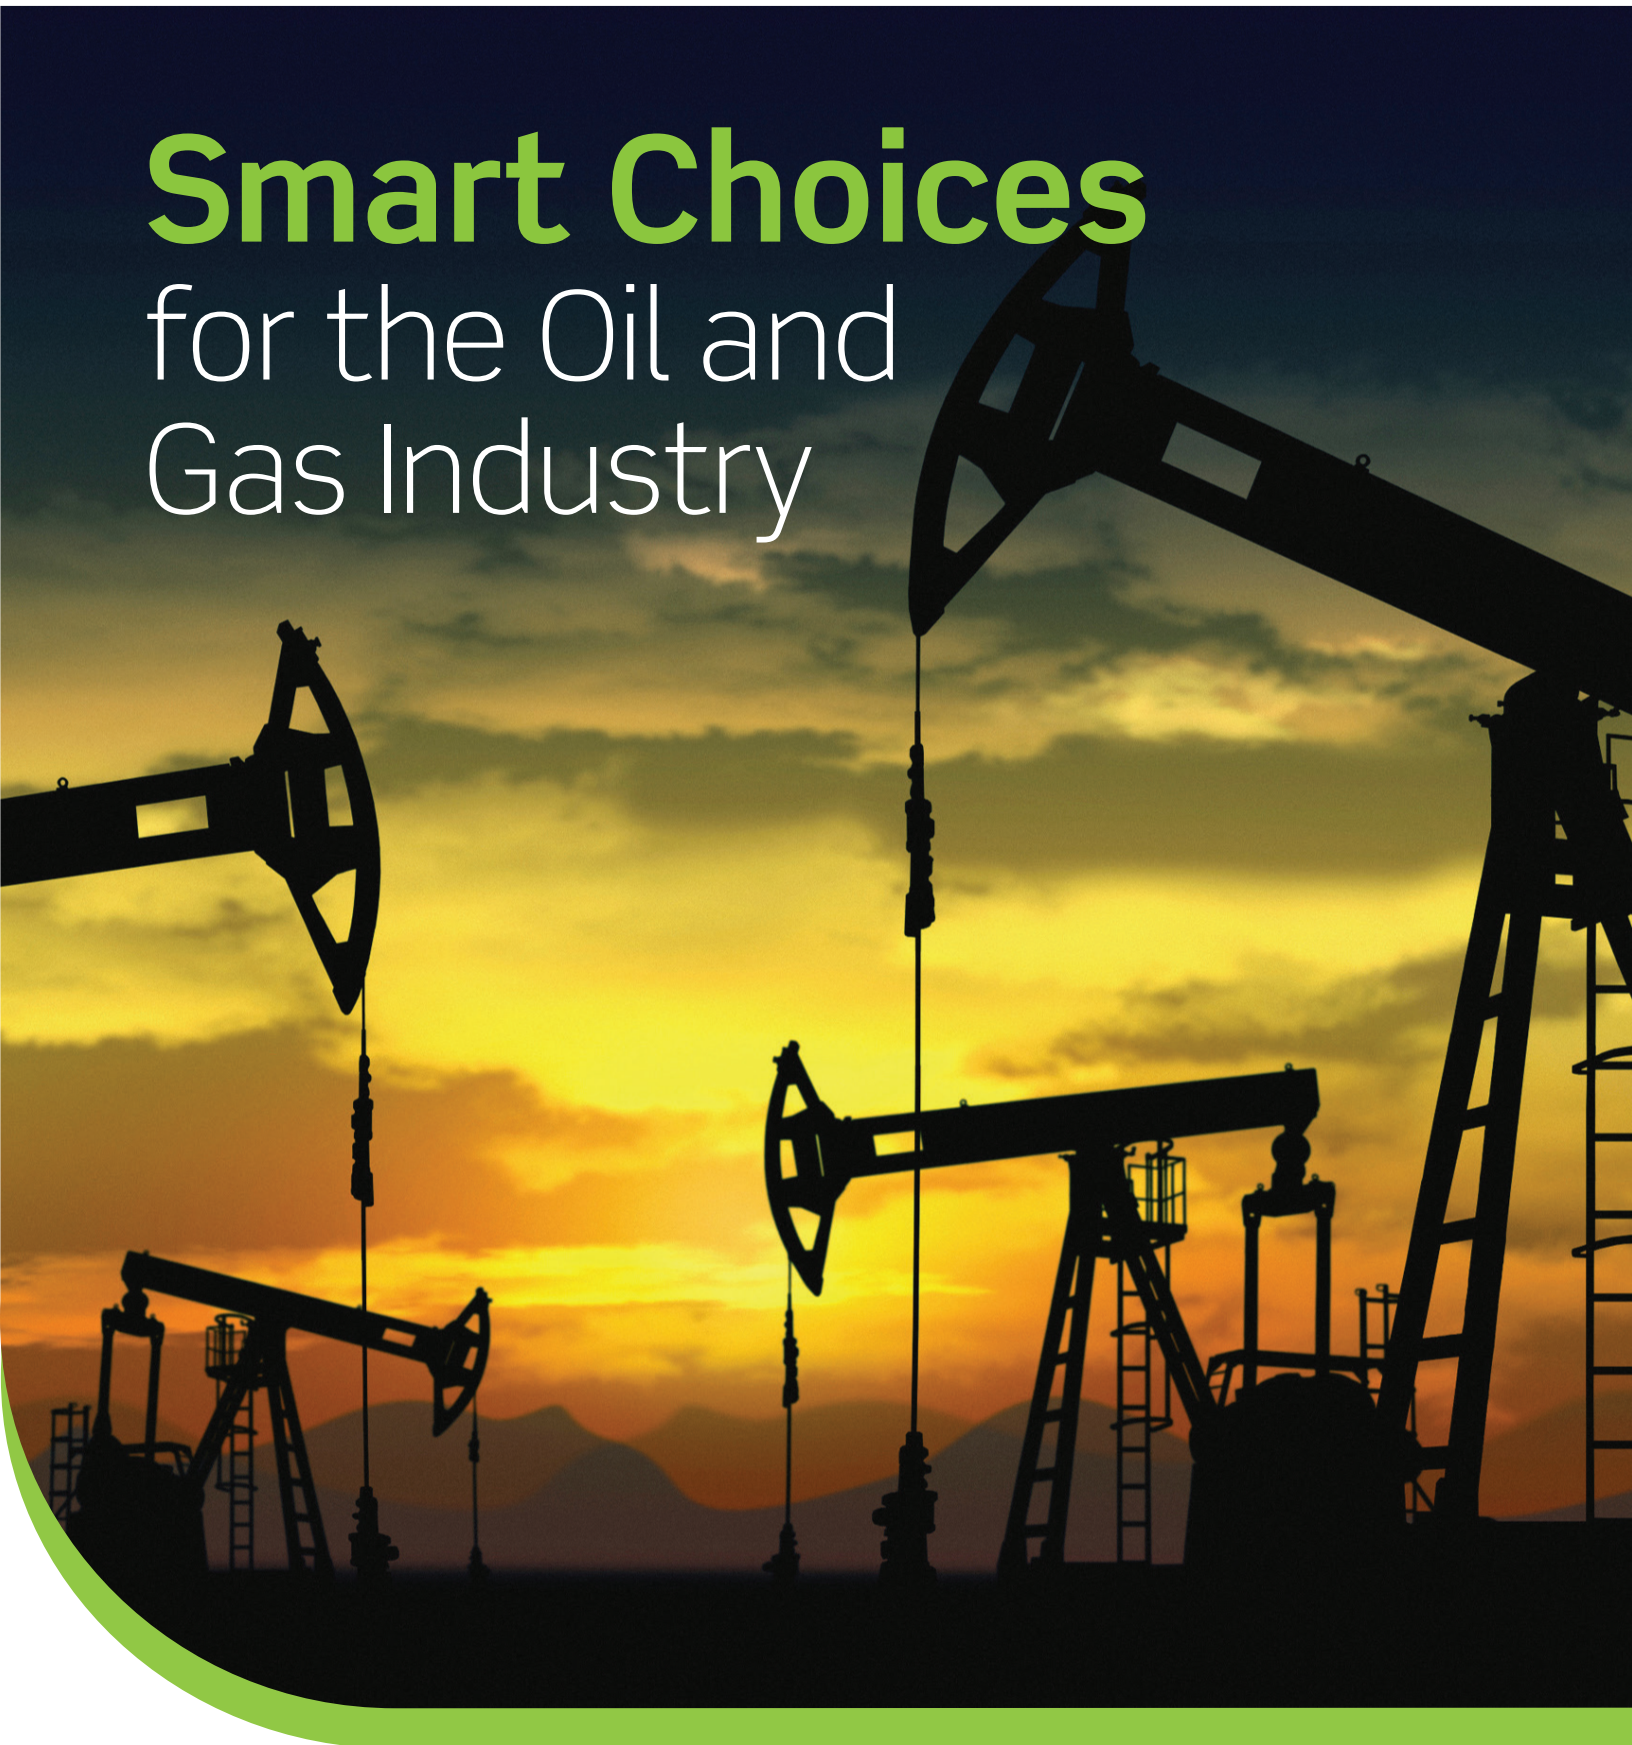

High Amperage, Temporary Power and Safety Solutions

Product Ordering Guide

Temporary Power

PORTABLE OUTLET BOXES

| Description | Cable Diameter | Yellow | Black |
|---------------------------------|-----------------|----------|----------|
| Standard Depth, Pendant Style | 0.590" - 1.000" | 3059-2Y | 3059-2E |
| Standard Depth Feed-Thru Style | 0.590" - 1.000" | 3059F-2Y | 3059F-2E |
| Extend Depth, Pendant Style | 0.590" - 1.000" | 3099-2Y | 3099-2E |
| Extended Depth, Feed-Thru Style | 0.590" - 1.000" | 3099F-2Y | 3099F-2E |



3059F-2Y

3099-2Y



3051-Y



3056-Y



3060-Y



3061-Y

COVERPLATES

Standard and with Flip Lids

| Description | Yellow | Black |
|---|--------|--------|
| Blank Coverplate | 3054-Y | 3054-E |
| Duplex Receptacle Coverplate | 3051-Y | 3051-E |
| Duplex Receptacle Coverplate with Weather-Resistant Flip Lid* | 3056-Y | 3056-E |
| GFCI / decora® Receptacle Coverplate | 3060-Y | 3060-E |
| GFCI / decora® Receptacle Coverplate with Weather-Resistant Flip Lid* | 3061-Y | 3061-E |

* NEMA Type 3R Rated

Black & White®

INDUSTRIAL GRADE PLUGS AND CONNECTORS

Straight Blade and Locking

| Straight Blade | | | | | | |
|----------------|-------|---------------|-------|--------------|--------|-----------|
| Amps | Volts | Pole/Wires | NEMA | AC HP Rating | Plug | Connector |
| 15 | 125V | 2-Pole 3-Wire | 5-15 | .5 | 5266-C | 5869-C |
| 20 | 125V | 2-Pole 3-Wire | 5-20 | 1 | 4366-C | 5369-C |
| Locking | | | | | | |
| 15 | 125V | 2-Pole 3-Wire | L5-15 | .5 | 4720-C | 4729-C |
| 20 | 125V | 2-Pole 3-Wire | L5-20 | 1 | 2311 | 2313 |



5269-C

5266-C

Dustguard®

SEVERE DUTY PLUGS AND CONNECTORS

Straight Blade and Locking

| Amp | Volt | NEMA Configuration | Plug | Connector |
|---------------------------------------|------|--------------------|------|-----------|
| Straight Blade 2-Pole, 3-Wire Devices | | | | |
| 15 | 125 | 5-15 | 1447 | 1547 |
| 15 | 250 | 6-15 | 1449 | 1549 |
| 20 | 125 | 5-20 | 1433 | 1533 |
| 20 | 250 | 6-20 | 1448 | 1548 |
| Locking 2-Pole, 3-Wire Devices | | | | |
| 15 | 125 | L5-15 | 2447 | 2547 |



1433

1533

Product Ordering Guide

Rhino-Hide® 49 Series

PANEL MOUNTED RECEPTACLES

49MR (Male) and 49FR (Female) for Cable Sizes 313 MCM Through 777 MCM

| Description | Complete Male Receptacle | | Complete Female Receptacle | |
|---|--------------------------|---------------------|----------------------------|---------------------|
| | Single Hole Bus Bar | Double Hole Bus Bar | Single Hole Bus Bar | Double Hole Bus Bar |
| Standard Clevis Pin | 49MR1-C* | 49MR2-C* | 49FR1-C* | 49FR2-C* |
| Color | | | | |
| * Add suffix for any of the following available color designations: White - W, Black - E, Brown - H, Red - R, Blue - B, Orange - O, Green, - G, Yellow - Y, Purple-P, Grey-GY | | | | |



49MR Series



Single Hole and Double Hole Bus Bar Terminations

X-SERIES PANEL MOUNTED RECEPTACLES

X Series 49MR (Male) and 49FR (Female) for Cable Sizes 313 MCM Through 777 MCM

| Description | Complete Male Receptacle | | Complete Female Receptacle | |
|---|--------------------------|-------------|----------------------------|-------------|
| | Single Hole | Double Hole | Single Hole | Double Hole |
| 45° Clevis Pin | 49MR1-X* | 49MR2-X* | 49FR1-X* | 49FR2-X* |
| Color | | | | |
| * Add suffix for any of the following available color designations: White - W, Black - E, Brown - H, Red - R, Blue - B, Orange - O, Green, - G, Yellow - Y, Purple-P, Grey-GY | | | | |



49MR X-Series

MALE AND FEMALE CONNECTORS

For Cable Sizes 313 MCM Through 777 MCM

| Complete MALE Connector by Cable Size | | | | |
|--|---------------|---------------|---------------|---------------|
| 313 MCM Cable | 444 MCM Cable | 535 MCM Cable | 646 MCM Cable | 777 MCM Cable |
| 49M31-* | 49M44-* | 49M53-* | 49M64-* | 49M77-* |
| Complete FEMALE Connector by Cable Size | | | | |
| 313 MCM Cable | 444 MCM Cable | 535 MCM Cable | 646 MCM Cable | 777 MCM Cable |
| 49F31-* | 49F44-* | 49F53-* | 49F64-* | 49F77-* |
| Contacts are for copper cable only. | | | | |
| Color | | | | |
| * Add suffix for any of the following available color designations: White - W, Black - E, Brown - H, Red - R, Blue - B, Orange - O, Green, - G, Yellow - Y, Purple-P, Gray - GY. | | | | |
| NOTE: not all items available in all colors - contact customer service for availability. | | | | |



Complete Male Connector & Contact 49M77-R



Complete Female Connector & Contact 49F77-G

PANEL MOUNTED RECEPTACLE ACCESSORIES AND REPLACEMENT PARTS

| Description | Color | Material | Cat. No. |
|------------------------------|-------|-----------|----------|
| Locking ground pin | — | Brass | 15GND-M |
| Locking ground plug (Female) | Green | TPV/Brass | 15D22-G |



15GND-M



15D22-G

Cam-Type Connectors - 16 Series

CONNECTORS (UP TO 300A, 600V)

16 Series, Taper Nose

| Description | Cat. No. Complete | Cat. No. Contact | Cat. No. Insulator |
|---|-------------------|------------------|--------------------|
| Male Detachable Plug - Double Set Screw (Cable Size: #2-2/0) | 16D22-* | 16D22-PC | 16SDM-2P* |
| Female Detachable Plug - Double Set Screw (Cable Size: #2-2/0) | 16D31-* | 16D31-PC | 16SDF-2P* |
| Male Detachable Plug - Crimped (Cable Size: 3/0-4/0) | 16D28-* | — | 16SDM-1P* |
| Female Detachable Plug - Crimped (Cable Size: 3/0-4/0) | 16D37-* | — | 16SDF-1P* |
| Color | | | |
| * Add suffix for any of the following available color designations: White - W, Black - E, Brown - H, Red - R, Blue - B, Orange - O, Green, - G, Yellow - Y. | | | |



Cam-Type Connectors - 16 Series

CONNECTORS (UP TO 400A, 600V)

16 Series, Taper Nose US

| Description | Cat. No. Complete | Cat. No. Contact | Cat. No. Insulator |
|---|-------------------|------------------|--------------------|
| Male Detachable Plug - Double Set Screw (Cable Size: 1/0-4/0) | 16D24-* | 16D24-PC | 16SDM-1P* |
| Female Detachable Plug - Double Set Screw (Cable Size: 1/0-4/0) | 16D33-* | 16D33-PC | 16SDF-1P** |
| Color | | | |
| * Add suffix for any of the following available color designations: White - W, Black - E, Brown - H, Red - R, Blue - B, Orange - O, Green, - G, Yellow - Y, Grey - GY. **Insulator not available in Grey. | | | |



PROTECTIVE CAPS AND COVERS

16 Series

| Description | Cat. No. | |
|---|----------|---------|
| | Male | Female |
| Protective Caps | 16P21-* | 16P22-* |
| NEMA 3R Enclosure | 16S31-* | 16S31-* |
| Color | | |
| * Add suffix for any of the following available color designations: White - W, Black - E, Brown - H, Red - R, Blue - B, Orange - O, Green, - G, Yellow - Y. | | |



16S31-R

PANEL RECEPTACLES (UP TO 400A, 600V)

16 Series, Taper Nose US

| Description | Termination | Cat. No. | |
|---|----------------------|----------|---------|
| | | Male | Female |
| Panel Receptacles | Threaded Stud, 3/4"L | 16R23-* | 16R24-* |
| | Double Set Screw | 16R21-* | 16R22-* |
| | Half-Round Tapped | 16R19-* | 16R20-* |
| Color | | | |
| * Add suffix for any of the following available color designations: White - W, Black - E, Brown - H, Red - R, Blue - B, Orange - O, Green, - G, Yellow - Y. | | | |



16R23

On the following pages please find a selected sampling of Leviton wiring devices with helpful ordering info. For comprehensive info and specs please visit leviton.com or speak to your leviton sales rep.

Wetguard®

WATER-TIGHT PLUGS AND CONNECTORS

Straight Blade and Locking

| Amp | Volt | NEMA Configuration | Plug | Connector |
|--|-------------|--------------------|--------|-----------|
| Straight Blade 2-Pole, 3-Wire Devices | | | | |
| 15 | 125 | 5-15 | 14W47* | 15W47* |
| 20 | 125 | 5-20 | 14W33 | 15W33 |
| Locking 2-Pole, 3-Wire Devices | | | | |
| 15 | 125 | L5-15 | 24W47* | 25W47* |
| 15 | 277 | L7-15 | 24W34 | 25W34 |
| 20 | 125 | L5-20 | 26W47* | 27W47* |
| 20 | 250 | L6-20 | 26W48* | 27W48* |
| 30 | 125 | L5-30 | 28W47* | 29W47* |
| Locking 3-Pole, 4-Wire Devices | | | | |
| 20 | 3Ø 250 | L15-20 | 26W75* | 27W75* |
| 20 | 3Ø 480 | L16-20 | 26W76* | 27W76* |
| 30 | 3Ø 250 | L15-30 | 28W75 | 29W75 |
| 30 | 3Ø 480 | L16-30 | 28W76* | 29W76* |
| Locking 3-Pole, 3-Wire Devices | | | | |
| 15 | 125 | Non-NEMA | 24W07 | 25W07 |
| 10 | 250 | | | |
| 20 | 125/250 | Non-NEMA | 26W08 | 27W08 |
| Locking 4-Pole, 4-Wire Devices | | | | |
| 20 | 3ØY 120/208 | Non-NEMA | 26W09 | 27W09 |
| 30 | 3ØY 120/208 | Non-NEMA | 28W09 | 29W09 |

* Available in black. To order, add "-B" suffix to catalog number.



14W47

















15W47

GFCI Devices

AUTOMATIC RESET GFCI CORD SETS

Straight Blade and Locking

| Cat. No. | Description | NEMA Plug | NEMA Connector | Rating |
|------------------|--|---|---|----------------|
| Cord Sets | | | | |
| GFA15-2C | 2 ft. Cord Set, Molded-On Plug and Connector, Automatic Reset GFCI Device, 14-3 SJTW Cord | 5-15P  | 5-15R  | 15 AMP 120V |
| GFA15-6C | 6 ft. Cord Set, Molded-On Plug and Connector, Straight Blade, Automatic Reset GFCI Device, 14-3 SJTW Cord | 5-15P  | 5-15R  | 15 AMP 120V |
| GFA15-25C | 25 ft. Cord Set, Molded-On Plug and Connector, Straight Blade, Automatic Reset GFCI Device, 14-3 SJTW Cord | 5-15P  | 5-15R  | 15 AMP 120V |
| GFA15-3TC | 3 ft. Cord Set, Molded-On Plug and Triple Tap Connector, Straight Blade, Automatic Reset GFCI Device, 14-3 SJTW Cord | 5-15P  | 5-15R  | 15 AMP 120V |
| GFA20-3C | 3 ft. Cord Set, Molded-On Plug and Connector, Straight Blade, Automatic Reset GFCI Device, 12-3 SJTW Cord | 5-20P  | 5-20R  | 20 AMP 120V |
| GFA20-3LC | 3 ft. Cord Set, Locking Plug and Locking Connector, Automatic Reset GFCI Device, 12-3 SJTW Cord | L5-20P  | L5-20R  | 20 AMP 120V |
| GFA15-37E | 37 ft. Cord Set, Molded-On Plug and No Connector, Straight Blade, Automatic Reset GFCI Device, 14-3 SJTW Cord | 5-15P  | No connector | 15 AMP 120V |
| GFA20-37E | 37 ft. Cord Set, Molded-On NEMA Plug and No Connector, Straight Blade, Automatic Reset GFCI Device, 12-3 SJTW Cord | 5-20P  | No connector | 20 AMP 120V |



GFA15-6C



GFA20-3LC

Smart Solutions for every industry



Food Processing
Energy Management
Health Care
Education
Hospitality
MDU



Leviton Manufacturing Co., Inc.

201 N Service Rd, Melville, NY 11747
Tel. 1-800-323-8920, FAX: 1-800-832-9538
Tech Line (7:00AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Blvd, Pointe-Claire, QC H9R 1E9
Tel. 1-800-469-7890, FAX: 1-800-563-1853

Leviton S. de R.L. de C.V.

Lago Tana 43, Col. Huichapan, Miguel Hidalgo, CP 11290 México DF.
Tel. (+52) 55-5082-1040, Fax: (+52) 55-5386-1797, www.leviton.com.mx

Visit our Website at: www.leviton.com

©2012 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.