


# Data sheet

## Straight BNC Jack - F Plug Adapter

RS Stock No: 5465092

NO	DESCRIPTION	DATE
△	WORKING VOLTAGE DEL PRODF VOLTAGE 50 OHMS → 75 OHMS (500) → (750)	10.29.13'

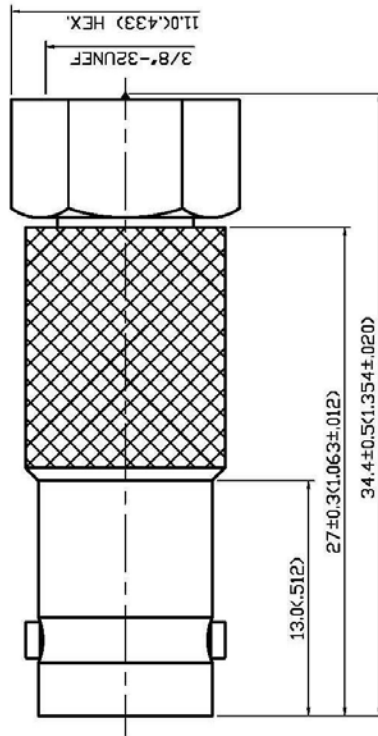

### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-1 GHz
- 1.2 NOMINAL IMPEDANCE: 75 OHMS △
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. △
- 1.4 VSWR: 1.3 MAX. @500 MHz

### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3804

### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -40° C TO +60° C

APPROVED by \_\_\_\_\_ DATE: \_\_\_\_\_

6	NUT	BRASS	1	NICKEL 100 $\mu$ ² MIN.
5	CHASSIS	BRASS	1	NICKEL 100 $\mu$ ² MIN.
4	INSULATION	POM	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD
2	INSULATION	POM	1	NONE
1	BODY	BRASS	1	NICKEL 100 $\mu$ ² MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

DESCRIPTION	STRAIGHT BNC JACK-F PLUG ADAPTER
製圖	品名
13-48	D.G.N
△	日
DATE	版
11.24.92'	B-1
REV.	
TITLE	ROHS COMPLIANT (750)
單	UNIT
.XX	mm(m)
±0.1	DWG.NO.
±0.05	13-0241
±0.05	SCALE
ANGLE	比例
±5°	4:1

