



# Automotive cable, flexible

## RADOX 155S FLR (FLR91X and FHLR91X)


### General Properties:

Excellent resistance to high and low temperature, ozone, UV and weathering resistance, resistant to pressure at high temperature, motor oil, fuels and hydrolysis, flame retardant, high abrasion resistant, solder iron resistant, easy to strip and process, according to ISO 6722- 1 class D, ISO 19642- 3 class D, ISO 19642- 5 class D.

Complies with EU- directive 2000/53/EG on end of life vehicles. All materials are free from lead, mercury, cadmium and chrome VI.

### Application:

Cable, for use in road vehicle applications.

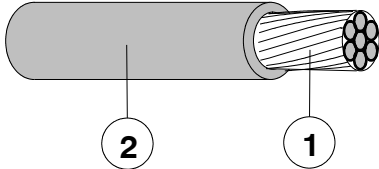

1. Conductor: Tinned or bare copper, stranded
2. Insulation: RADOX 155S (91X) extruded irradiation crosslinked polyolefin  
Colours: BK, BN, BU, GN, GY, OG, PK, RD, VT, WH, YE

### Technical Data:

Voltage rating DC	< 0.5 mm <sup>2</sup>	60 V
	≥ 0.5 mm <sup>2</sup>	1500 V
Test voltage AC	< 0.5 mm <sup>2</sup>	3000 V
	≥ 0.5 mm <sup>2</sup>	5000 V
	> 0.5 mm <sup>2</sup>	8000 V
Temperature range (3000 h)		- 40 ... +150 °C
Min. bending radius		3 x cable D

Dimensions according to ISO 6722- 1 / ISO 19642, structure A

Cross-section Nominal mm <sup>2</sup>	Conductor Number of individual wires	Diameter of individual wires max. mm	Diameter max. mm	Resistance at 20° C max Ω/km		Core	
				tinned	bare	Wall thickness min. mm	Diameter mm
0.35	7	0.26	0.8	55.5	54.4	0.20	1.25 ± 0.05
0.5	19	0.19	1.0	38.2	37.1	0.22	1.5 ± 0.1
0.75	19	0.23	1.2	25.4	24.7	0.24	1.8 ± 0.1
1	19	0.26	1.3	19.1	18.5	0.24	2.0 ± 0.1
1.5	19	0.32	1.7	13.0	12.7	0.24	2.3 ± 0.1
2.5	19	0.41	2.2	7.82	7.60	0.28	2.85 ± 0.15
2.5	37	0.29	2.2	7.82	7.60	0.28	2.85 ± 0.15
4	37	0.38	2.6	4.85	4.71	0.32	3.55 ± 0.15
6	37	0.45	3.1	3.23	3.14	0.32	4.15 ± 0.15

Dimensions according to ISO 6722- 1 / ISO 19642, structure B

Cross-section Nominal mm <sup>2</sup>	Conductor Number of individual wires	Diameter of individual wires max. mm	Diameter max. mm	Resistance at 20° C max Ω/km		Core	
				tinned	bare	Wall thickness min. mm	Diameter mm
0.75	24	0.21	1.2	25.4	24.7	0.24	1.8 ± 0.1
1	32	0.21	1.3	19.1	18.5	0.24	2.0 ± 0.1
1.5	30	0.26	1.7	13.0	12.7	0.24	2.3 ± 0.1
2.5	50	0.26	2.2	7.82	7.60	0.28	2.85 ± 0.15
4	56	0.31	2.6	4.85	4.71	0.32	3.55 ± 0.15
6	84	0.31	3.1	3.23	3.14	0.32	4.15 ± 0.15

Copyright 2018 Huber + Suhner AG. This document may not be copied nor be passed on to third parties without our written permission  
Uncontrolled copy when printed [will not be updated].

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

**HUBER+SUHNER**  
Low Frequency Division

CH- 8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com