

Aluminum Straight and 90° Grip-Seals™



- UL Listed
- CSA Certified


- NEMA Standard FBI-1983

- Straight and 90° Configurations

- Liquid Tight Seal
- RoHS Compliant


NICKEL-PLATED FRICTION RING

Provides uniform compression for a proper seal. Prevents bushing damage and results in a tight, uniform seal on the cord surface.



SEALING O-RING

Seals out oil, chemicals and other contaminants. Locknut included with each unit.

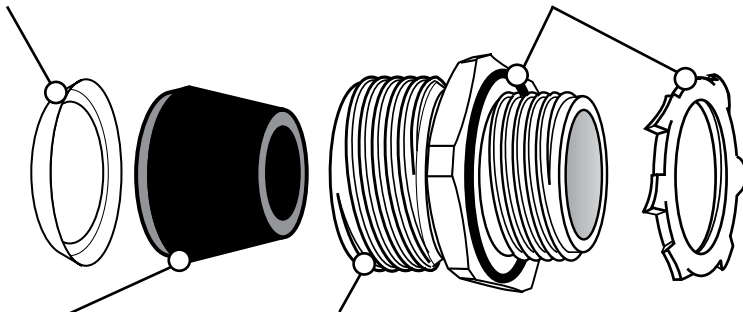

MULTIPLE SEALING BUSHINGS

Provides environmental seal against dust, moisture, chemicals. One part number covers a variety of cord diameters. 250°F maximum operating temperature.

ALUMINUM COMPRESSION BUSHING AND THREADED BODY

Resistant to corrosion and weathering. Easy attachment to pendants and electrical enclosures. Available in both a 90° and straight configuration.

ORDERING INFORMATION

Straight Aluminum Grip Seals

| PART NO. | CONFIGURATION | CONDUIT SIZE | CORD O.D. RANGE (IN.) | NO. OF BUSHINGS |
|----------|---------------|--------------|-----------------------|-----------------|
| 55001 | Straight | 3/8" | .188 - .312 | 2 |
| 55002 | Straight | 3/8" | .312 - .438 | 2 |
| 55003 | Straight | 1/2" | .250 - .375 | 2 |
| 55004 | Straight | 1/2" | .375 - .500 | 2 |
| 55005 | Straight | 1/2" | .50 - .625 | 2 |
| 55006 | Straight | 3/4" | .500 - .688 | 2 |
| 55007 | Straight | 3/4" | .625 - .812 | 2 |
| 55008 | Straight | 1" | .688 - .875 | 2 |
| 55009 | Straight | 1" | .812 - 1.00 | 2 |
| 55010 | Straight | 1-1/4" | .875 - 1.125 | 2 |
| 55011 | Straight | 1-1/4" | 1.125 - 1.375 | 2 |
| 55012 | Straight | 1-1/2" | .875 - 1.125 | 2 |
| 55013 | Straight | 1-1/2" | 1.125 - 1.375 | 2 |
| 55014 | Straight | 2" | 1.250 - 1.562 | 2 |
| 55015 | Straight | 2" | 1.562 - 1.812 | 2 |
| 55016 | Straight | 2-1/2" | 1.812 - 2.062 | 2 |
| 55017 | Straight | 2-1/2" | 2.062 - 2.312 | 2 |

90° Aluminum Grip Seals

| PART NO. | CONFIGURATION | CONDUIT SIZE | CORD O.D. RANGE (IN.) | NO. OF BUSHINGS |
|----------|---------------|--------------|-----------------------|-----------------|
| 55901 | 90° | 3/8" | .188 - .312 | 2 |
| 55902 | 90° | 3/8" | .312 - .438 | 2 |
| 55903 | 90° | 1/2" | .250 - .375 | 2 |
| 55904 | 90° | 1/2" | .375 - .500 | 2 |
| 55905 | 90° | 1/2" | .50 - .625 | 2 |
| 55906 | 90° | 3/4" | .500 - .688 | 2 |
| 55907 | 90° | 3/4" | .625 - .812 | 2 |
| 55908 | 90° | 1" | .688 - .875 | 2 |
| 55909 | 90° | 1" | .812 - 1.00 | 2 |
| 55910 | 90° | 1-1/4" | .875 - 1.125 | 2 |
| 55911 | 90° | 1-1/4" | 1.125 - 1.375 | 2 |
| 55912 | 90° | 2" | 1.250 - 1.562 | 2 |
| 55913 | 90° | 2" | 1.562 - 1.812 | 2 |