



Traction cable

RADOX GWK-LW 600V MM

Product description:

RADOX GWK-LW 600V MM Multicore cables, unscreened
 Nominal voltage: 600 / 1000 V AC
 Hazard level: M (extra low temperature, extra oil and extra fuel resistant)

General features:


Halogen free, electron-beam cross-linked cables with improved behaviour in case of fire, easy to strip, soldering iron resistant and flexible.

Application:

The cables are intended for permanent installation in rail vehicles or for applications in which a limited alternating bending stress occur during service.

Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

General composition of cable:

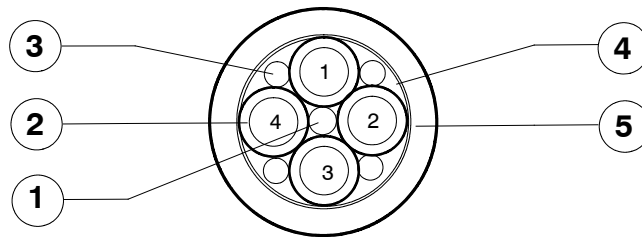

- | | |
|------------------------------|---|
| 1. Centre (optional) | RADOX 125 REC |
| 2. RADOX GWK-LW 600V M cores | Conductor: stranded tin plated copper, acc. to EN 50306-2
Insulation: RADOX TI 301
Colours: white, black numbered
greenyellow (optional) |
| 3. Filler (optional) | RADOX 125 REC |
| 4. Separator | Tape |
| 5. Sheath | RADOX EM 104, acc. to EN 50264-1
Colour: black, yellow marked |

Marking:

[a] HUBER+SUHNER RADOX GWK-LW 600V [b] MM [c]-[d] [e] [f] [g]

	example:
[a] Meter marking (in m)	= 1234 = m
[b] Construction	3G1.5
[c] Part number	12345678
[d] Batch number	1234567
[e] Production week and year	03-2017
[f] Production place (only if China)	CN
[g] CRCC certificate (only if available)	CRCC10218P11529R1M

Copyright 2019 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG

Low Frequency Division

CH- 8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com



Traction cable

RADOX GWK-LW 600V MM

Technical Data:

Voltage rating cond.- earth	U_0	600	V AC
Voltage rating cond.- cond.	U	1000	V AC
maximum permissible Voltage rating AC cond.- earth	720	V AC
maximum permissible Voltage rating AC cond.- cond.	U_m	1200	V AC
maximum permissible Voltage rating DC cond.- earth	V_0	900	V DC
maximum permissible Voltage rating DC cond.- cond.	1500	V DC
Test voltage	3500	V AC
Temperature range	- 50 ... + 120	°C
Min. bending radius						
fixed installation	$D \leq 12 \text{ mm}$	3 x D		
	$D > 12 \text{ mm}$	4 x D		
sporadic movement	$D \leq 12 \text{ mm}$	4 x D		
	$D > 12 \text{ mm}$	5 x D		

NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours.

The lower temperature limit is determined by bending and elongation tests according to EN 60811-504/505, respectively low temperature behaviour tests for according to GOST 20.57.406-81, method 204-1 and GOST 17491-80. (fixed installation)

The specified bending radii require a careful and proper handling using proven fastening technologies.



Traction cable

RADOX GKW-LW 600V MM

The cables are in conformity with:

Fire protection on railway vehicles, category	Ia, Ib, II	BS 6853, GM/RT 2130
Vertical flame spread	$50 < L \leq 540$ mm	EN 60332- 1- 2
Vertical flame spread, bunched	$L \leq 2.5$ m	EN 50266, BS 6853 An. D.8.7
Smoke density	$A_0 \leq$ BS 6853	BS 6853 An. D.8.7
Toxicity	$R \leq 1.0$	BS 6853 An. B.1
Fire protection on railway vehicles, hazard level	HL1 - HL3	EN 45545
Vertical flame spread	$50 < L \leq 540$ mm	EN 60332- 1- 2
Vertical flame spread, bunched, $D \leq 6$ mm	$L \leq 1.5$ m	EN 50305, 9.1.2
Vertical flame spread, bunched, $6 < D < 12$ mm	$L \leq 2.5$ m	EN 50305, 9.1.1 (EN 60332- 3- 25)
Vertical flame spread, bunched, $D \geq 12$ mm	$L \leq 2.5$ m	EN 60332- 3- 24
Smoke density	$T \geq 70$ %	EN 61034- 2
Toxicity	$ITC \leq 6$	EN 50305, 9.2
Fire protection on railway vehicles, level of protection	1 - 4	DIN 5510
Vertical flame spread	$50 < L \leq 540$ mm	EN 60332- 1- 2
Vertical flame spread, bunched, $D \leq 6$ mm	$L \leq 1.5$ m	EN 50305, 9.1.2
Vertical flame spread, bunched, $6 < D < 12$ mm	$L \leq 2.5$ m	EN 60332- 3- 25
Vertical flame spread, bunched, $D \geq 12$ mm	$L \leq 2.5$ m	EN 60332- 3- 24
Smoke density	$T \geq 60$ %	EN 61034- 2
Corrosivity of combustion gases	$pH \geq 4.3$, $C \leq 10$ μ S/mm	EN 50267- 2- 2
Amount of halogen acid gas	$HCl + HBr \leq 0.5$ %	EN 50267- 2- 1
Content of fluorine	$HF \leq 0.1$ %	EN 60684- 2, 45.2
Toxicity, insulation	$ITC \leq 6$	EN 50305, 9.2
Toxicity, filler and sheath	$ITC \leq 3$	EN 50305, 9.2
Fire protection on railway vehicles, category	A1, A2, B	NF F16- 101
Fire protection on railway vehicles, class	C / F1	NF F16- 101
Vertical flame spread	$50 < L \leq 540$ mm	NF C32- 070, 2.1
Vertical flame spread, bunched	$L \leq 300$ mm	NF C32- 070, 2.2
Smoke index	$I.F. \leq 5$	X10- 702- 2, NF X70- 100- 1
Fire protection on railway vehicles, hazard level	LR1 - LR4	UNI CEI 11170
Vertical flame spread	$50 < L \leq 540$ mm	EN 60332- 1- 2
Vertical flame spread, bunched, $D \leq 6$ mm	$L \leq 1.5$ m	EN 50305, 9.1.2
Vertical flame spread, bunched, $6 < D < 12$ mm	$L \leq 2.5$ m	EN 60332- 3- 25
Vertical flame spread, bunched, $D \geq 12$ mm	$L \leq 2.5$ m	EN 60332- 3- 24
Smoke density	$T \geq 70$ %	EN 61034- 2
Corrosivity of combustion gases	$pH \geq 4.3$, $C \leq 10$ μ S/mm	EN 50267- 2- 2
Amount of halogen acid gas	$HCl + HBr \leq 0.5$ %	EN 50267- 2- 1
Toxicity, insulation	$ITC \leq 6$	EN 50305, 9.2
Toxicity, filler and sheath	$ITC \leq 3$	EN 50305, 9.2
Fire protection on railway vehicles	Fulfilled	NFPA 130
Vertical flame spread, bunched	$L \leq 1.5$ m	UL 1685, 12 (FT4 exp.)
Smoke density	$PSRR \leq 0.40$ m ² /s	UL 1685, 12 (FT4 exp.)
	$TSR \leq 150$ m ²	

Requirement of hazard level code M	(acc. to EN 50264- 1 or EN 50306- 1)
Extra low temperature	- 40°C
Extra oil resistance	IRM 902, 72h, 100°C
Extra fuel resistance	IRM 903, 168h, 70°C

Applicable documents:

H+S : 563078 (e) : Current rating for multicore cables

H+S : 554550 (e) : Technical Datasheet RADOX GKW-LW 600V M (cores)



Traction cable

RADOX GWK-LW 600V MM

Construction n x mm ² 1)	Conductor Dia.-nom. 2) mm	Core 3) Dia.-nom. mm	Cable Dia. mm	R ₂₀ 4) max. Ω/km	C' 5) nom. pF/m	Fireload nom. kJ/m	Weight nom.		H+S Part No.
							Copper	Cable	
							kg / 100m		
2 x 0.5	0.9	1.30	4.0 ± 0.2	40.1	105	245	1.0	2.7	12 556 756
3 x 0.5	0.9	1.30	4.2 ± 0.2	40.1	105	265	1.4	3.1	12 556 757
4 x 0.5	0.9	1.30	4.5 ± 0.2	40.1	105	305	1.9	3.7	12 556 758
5 x 0.5	0.9	1.30	5.0 ± 0.2	40.1	105	375	2.3	4.6	12 556 759
5 G 0.5	0.9	1.30	5.0 ± 0.2	40.1	105	375	2.3	4.6	12 562 757
6 x 0.5	0.9	1.30	5.4 ± 0.2	40.1	105	440	2.8	5.3	12 556 760
7 x 0.5	0.9	1.30	5.8 ± 0.3	40.1	105	515	3.2	6.2	12 556 761
9 x 0.5	0.9	1.30	6.7 ± 0.3	40.1	105	600	4.2	7.6	12 561 299
10 x 0.5	0.9	1.30	6.7 ± 0.3	40.1	105	595	4.6	7.9	12 556 762
12 x 0.5	0.9	1.30	6.9 ± 0.3	40.1	105	660	5.5	9.0	12 556 763
15 x 0.5	0.9	1.30	7.8 ± 0.3	40.1	105	865	6.9	11.5	12 561 300
16 x 0.5	0.9	1.30	7.8 ± 0.3	40.1	105	860	7.4	11.9	12 556 764
24 x 0.5	0.9	1.30	9.5 ± 0.3	40.1	105	1145	11.1	16.9	12 556 766
25 x 0.5	0.9	1.30	9.5 ± 0.3	40.1	105	1175	11.5	17.1	12 561 301
36 x 0.5	0.9	1.30	11.2 ± 0.4	40.1	105	1710	16.6	24.7	12 556 811



Traction cable

RADOX GWK-LW 600V MM

Construction n x mm ² 1)	Conductor Dia. _{nom.} 2) mm	Core 3) Dia. _{nom.} mm	Cable Dia. mm	R ₂₀ 4) max. Ω/km	C' 5) nom. pF/m	Fireload nom. kJ/m	Weight _{nom.} Copper Cable kg / 100m		H+S Part No.	
2 x 0.75	1.1	1.52	4.4 ± 0.2	26.7	110	290	1.4	3.4	12 556 767	
2 x 0.75	1.1	1.52	4.4 ± 0.2	26.7	110	290	1.4	3.4	84 144 497	6)
3 x 0.75	1.1	1.52	4.6 ± 0.2	26.7	110	310	2.1	4.1	12 556 768	
3 G 0.75	1.1	1.52	4.6 ± 0.2	26.7	110	310	2.1	4.1	12 562 758	
4 x 0.75	1.1	1.52	5.0 ± 0.2	26.7	110	355	2.8	5.0	12 556 769	
4 x 0.75	1.1	1.52	5.0 ± 0.2	26.7	110	355	2.8	5.0	84 144 495	6)
5 x 0.75	1.1	1.52	5.7 ± 0.3	26.7	110	460	3.5	6.3	12 556 770	
5 G 0.75	1.1	1.52	5.7 ± 0.3	26.7	110	460	3.5	6.3	12 562 262	
6 x 0.75	1.1	1.52	6.0 ± 0.3	26.7	110	520	4.3	7.2	12 556 771	
7 x 0.75	1.1	1.52	6.8 ± 0.3	26.7	110	675	5.0	8.9	12 556 772	
8 x 0.75	1.1	1.52	7.35 ± 0.3	26.7	110	741	5.6	10.5	12 561 829	
9 x 0.75	1.1	1.52	7.7 ± 0.3	26.7	110	755	6.4	10.7	12 581 701	
9 G 0.75	1.1	1.52	7.7 ± 0.3	26.7	110	755	6.4	10.7	12 581 833	
10 x 0.75	1.1	1.52	7.7 ± 0.3	26.7	110	750	7.1	11.3	12 556 773	
12 x 0.75	1.1	1.52	7.9 ± 0.3	26.7	110	820	8.5	12.8	12 556 673	
14 x 0.75	1.1	1.52	8.4 ± 0.3	26.7	110	937	9.9	14.8	12 561 830	
16 x 0.75	1.1	1.52	9.0 ± 0.3	26.7	110	1082	11.3	16.9	12 556 774	
18 x 0.75	1.1	1.52	9.4 ± 0.3	26.7	110	1200	12.7	18.8	12 556 775	
20 x 0.75	1.1	1.52	10.2 ± 0.4	26.7	110	1400	14.2	21.1	12 561 831	
24 x 0.75	1.1	1.52	11.1 ± 0.4	26.7	110	1485	17.0	24.7	12 556 776	

6) Cable with red sheath



Traction cable

RADOX GWK-LW 600V MM

Construction n x mm ² 1)	Conductor Dia. _{nom.} 2) mm	Core 3) Dia. _{nom.} mm	Cable Dia. mm	R ₂₀ 4) max. Ω/km	C' 5) nom. pF/m	Fireload nom. kJ/m	Weight _{nom.}		H+S Part No.
							Copper	Cable kg / 100m	
2 x 1	1.2	1.67	4.7 ± 0.2	20.0	115	320	1.8	4.1	12 556 777
3 x 1	1.2	1.67	5.0 ± 0.2	20.0	115	350	2.7	5.0	12 556 778
4 x 1	1.2	1.67	5.5 ± 0.2	20.0	115	405	3.6	6.1	12 556 779
5 x 1	1.2	1.67	6.0 ± 0.3	20.0	115	500	4.5	7.5	12 556 780
5 G 1	1.2	1.67	6.0 ± 0.3	20.0	115	500	4.5	7.5	12 563 051
6 x 1	1.2	1.67	6.6 ± 0.3	20.0	115	605	5.4	9.0	12 556 781
7 x 1	1.2	1.67	7.3 ± 0.3	20.0	115	750	6.3	10.7	12 556 475
12 x 1	1.2	1.67	8.6 ± 0.3	20.0	115	920	10.9	15.8	12 556 783
16 x 1	1.2	1.67	9.6 ± 0.3	20.0	115	1170	14.5	20.5	12 556 784
20 x 1	1.2	1.67	11.2 ± 0.4	20.0	115	1600	18.1	26.6	12 556 476
22 x 1	1.2	1.67	11.6 ± 0.4	20.0	115	1680	20.0	27.0	12 583 631
36 x 1	1.2	1.67	14.0 ± 0.4	20.0	115	2365	32.7	44.1	12 556 817



Traction cable

RADOX GWK-LW 600V MM

Construction n x mm ² 1)	Conductor Dia. _{nom.} 2) mm	Core 3) Dia. _{nom.} mm	Cable Dia. mm	R ₂₀ 4) max. Ω/km	C' 5) nom. pF/m	Fireload nom. kJ/m	Weight _{nom.}		H+S Part No.
							Copper	Cable kg / 100m	
2 x 1.5	1.5	2.04	5.4 ± 0.3	13.7	120	420	2.7	5.7	12 556 786
3 x 1.5	1.5	2.04	5.8 ± 0.3	13.7	120	465	4.1	7.2	12 555 404
3 G 1.5	1.5	2.04	5.8 ± 0.3	13.7	120	465	4.1	7.2	12 559 973
4 x 1.5	1.5	2.04	6.5 ± 0.3	13.7	120	570	5.4	9.1	12 556 787
4 G 1.5	1.5	2.04	6.5 ± 0.3	13.7	120	570	5.4	9.1	12 562 759
5 x 1.5	1.5	2.04	7.2 ± 0.3	13.7	120	705	6.7	11.2	12 555 405
5 G 1.5	1.5	2.04	7.2 ± 0.3	13.7	120	705	6.7	11.2	12 559 974
6 x 1.5	1.5	2.04	7.9 ± 0.3	13.7	120	855	8.1	13.5	12 556 788
6 G 1.5	1.5	2.04	7.9 ± 0.3	13.7	120	855	8.1	13.5	12 563 990
7 x 1.5	1.5	2.04	8.4 ± 0.3	13.7	120	1000	9.4	15.6	12 556 789
7 G 1.5	1.5	2.04	8.4 ± 0.3	13.7	120	1000	9.4	15.6	12 559 975
8 x 1.5	1.5	2.04	9.3 ± 0.3	13.7	120	1235	10.7	18.4	12 559 717
10 x 1.5	1.5	2.04	10.0 ± 0.3	13.7	120	1180	13.5	20.9	12 556 791
10 G 1.5	1.5	2.04	10.0 ± 0.3	13.7	120	1180	13.5	20.9	12 566 521
12 x 1.5	1.5	2.04	10.4 ± 0.4	13.7	120	1330	16.1	24.4	12 555 406
14 x 1.5	1.5	2.04	11.1 ± 0.4	13.7	120	1530	18.8	28.5	12 562 572
16 x 1.5	1.5	2.04	11.7 ± 0.4	13.7	120	1705	21.5	31.7	12 556 792
18 x 1.5	1.5	2.04	12.5 ± 0.4	13.7	120	1950	24.2	36.0	12 556 793
24 x 1.5	1.5	2.04	14.5 ± 0.4	13.7	120	2325	32.2	46.6	12 556 818
25 G 1.5	1.5	2.04	14.6 ± 0.4	13.7	120	2430	33.6	48.3	12 564 477
30 x 1.5	1.5	2.04	15.7 ± 0.5	13.7	120	2870	40.3	56.9	12 556 820
36 G 1.5	1.5	2.04	17.1 ± 0.5	13.7	120	3490	48.4	69.0	12 568 635
36 x 1.5	1.5	2.04	17.1 ± 0.5	13.7	120	3490	48.4	69.0	12 555 408
50 x 1.5	1.5	2.04	20.1 ± 0.5	13.7	120	4565	69	93.6	12 565 315



Traction cable

RADOX GWK-LW 600V MM

Construction n x mm ² 1)	Conductor Dia. _{nom.} 2) mm	Core 3) Dia. _{nom.} mm	Cable Dia. mm	R ₂₀ 4) max. Ω/km	C' 5) nom. pF/m	Fireload nom. kJ/m	Weight _{nom.} Copper Cable kg / 100m		H+S Part No.
2 x 2.5	1.9	2.54	6.6 ± 0.3	8.21	125	630	4.4	8.5	12 556 794
3 x 2.5	1.9	2.54	7.0 ± 0.3	8.21	125	690	6.6	10.5	12 556 415
3 G 2.5	1.9	2.54	7.0 ± 0.3	8.21	125	690	6.6	10.5	12 564 478
4 x 2.5	1.9	2.54	7.9 ± 0.3	8.21	125	865	8.8	13.5	12 556 795
4 G 2.5	1.9	2.54	7.9 ± 0.3	8.21	125	865	8.8	13.5	12 562 760
5 G 2.5	1.9	2.54	8.8 ± 0.3	8.21	125	1060	11.0	16.7	12 567 459
6 x 2.5	1.9	2.54	9.6 ± 0.3	8.21	125	1265	13.2	19.8	12 556 797
7 x 2.5	1.9	2.54	10.5 ± 0.4	8.21	125	1575	15.4	23.7	12 556 798
7 G 2.5	1.9	2.54	10.5 ± 0.4	8.21	125	1575	15.4	23.7	12 566 649
10 x 2.5	1.9	2.54	12.3 ± 0.4	8.21	125	1790	22.0	31.0	12 556 800
12 x 2.5	1.9	2.54	12.6 ± 0.4	8.21	125	1975	26.3	35.7	12 556 416
16 x 2.5	1.9	2.54	14.5 ± 0.4	8.21	125	2645	35.1	47.6	12 556 801
18 x 2.5	1.9	2.54	15.4 ± 0.5	8.21	125	3005	39.5	53.7	12 556 802
20 x 2.5	1.9	2.54	16.2 ± 0.5	8.21	125	3355	43.9	59.5	12 562 080
25 x 2.5	1.9	2.54	18.2 ± 0.5	8.21	125	3915	54.8	72.4	12 556 803
25 G 2.5	1.9	2.54	18.2 ± 0.5	8.21	125	3915	54.8	72.4	12 568 634
33 x 2.5	1.9	2.54	20.1 ± 0.5	8.21	125	4760	72.4	93.2	12 563 721
35 x 2.5	1.9	2.54	21.1 ± 0.5	8.21	125	5370	76.7	101	12 562 081
46 x 2.5	1.9	2.54	25.7 ± 0.6	8.21	125	8930	99.1	149	85 032 270 7)

7) RADOX GWK-LW 600V 46x2.5 MM T, with additional textile braid



Traction cable

RADOX GWK-LW 600V MM

AWG - cross sections:

Construction n x mm ² 1)	Conductor Dia. _{nom.} 2) mm	Core 3) Dia. _{nom.} mm	Cable Dia. mm	R ₂₀ 4) max. Ω/km	C' 5) nom. pF/m	Fireload nom. kJ/m	Weight _{nom.}		H+S Part No.
							Copper kg / 100m	Cable	
3 x 0.4	0.75	1.18	4.2 ± 0.3	54.7	110	268	1.1	2.9	84 134 931
2 x 2	1.7	2.29	6.1 ± 0.3	10.3	180	498	3.8	6.5	12 566 059

Cables with coloured cores:

Construction n x mm ² 1)	Conductor Dia. _{nom.} 2) mm	Core colours 3)	Core 3) Dia. _{nom.} mm	Cable Dia. mm	R ₂₀ 4) max. Ω/km	C' 5) nom. pF/m	Fireload nom. kJ/m	Weight _{nom.}		H+S Part No.
								Copper kg / 100m	Cable	
3V1.5	1.49	bn, bu, gnye	2.04	5.8 ± 0.3	13.7	120	470	4.1	7.2	85 031 122

- 1) X: one colour, numbered
G: one green-yellow core, others one colour, numbered
V: various colours
- 2) conductor construction see Annex
- 3) Cores: Core details according to H+S Datasheet 554550
- 4) R₂₀: Conductor resistance according to EN 50306-2
- 5) C': Capacity per unit length, core/core

AWG cross sections: 0.4 = 22 AWG
0.6 = 20 AWG
1.0 = 18 AWG
1.2 = 16 AWG

Annex

Conductor constructions:

mm ²	AWG	Construction
0.4	22	19x0.16 mm
0.5	-	19x0.18 mm
0.6	20	19x0.20 mm
0.75	-	19x0.23 mm
1	18	19x0.26 mm
1.5	-	37x0.23 mm
2	14	37x0.25 mm
2.5	-	37x0.29 mm