



Traction cable

RADOX TENUIS-TW 600V MM

Product description:

RADOX TENUIS- TW 600V MM

Nominal voltage:

Multicore cables, unscreened

600 / 1000 V AC

Hazard level:

M (extra low temperature, extra oil and extra fuel resistant)

General features:


Halogen free, electron- beam cross- linked cables with improved behaviour in case of fire, easy to strip, soldering iron resistant and flexible.

Application:

The cables are intended for permanent installation in rail vehicles or for applications in which a limited alternating bending stress occur during service.

Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

General composition of cable:

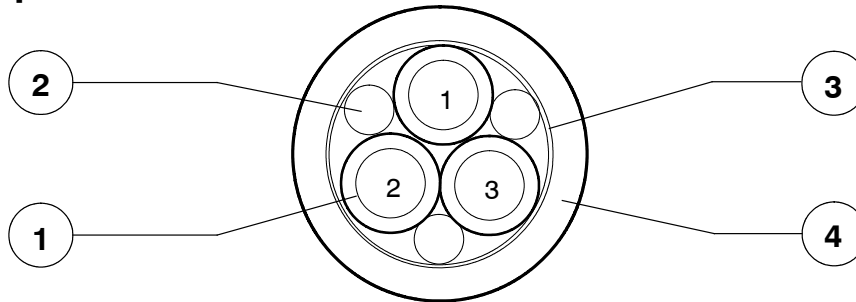

1. Twisted cores
RADOX TENUIS- TW 600V

Conductor: stranded tin plated copper, acc. to EN 50306- 2

Insulation: RADOX EI 303

Colours: white, black numbered
other colours on request

2. Filler (optional)
3. Separator (optional)
4. Sheath

RADOX 125 REC

Tape

RADOX EM 104, acc. to EN 50264- 1

Colour: black, yellow marked

Marking:

[a] HUBER+SUHNER RADOX TENUIS- TW 600V [b] MM [c]- [d] [e] [f] [g]

		example:
[a]	Meter marking (in m)	= 1234 = m
[b]	Construction	3X1.5
[c]	Part number	12345678
[d]	Batch number	1234567
[e]	Production week and year	03- 2017
[f]	Production place (only if China)	CN
[g]	CRCC certificate (only if available)	CRCC10218P11529R1M

Copyright 2019 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG
Low Frequency Division

CH- 8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com



Traction cable

RADOX TENUIS-TW 600V MM

Technical Data :

Voltage rating cond.- earth	U_0	600	V AC
Voltage rating cond.- cond.	U	1000	V AC
maximum permissible Voltage rating AC cond.- earth	720	V AC
maximum permissible Voltage rating AC cond.- cond.	U_m	1200	V AC
maximum permissible Voltage rating DC cond.- earth	V_0	900	V DC
maximum permissible Voltage rating DC cond.- cond.	1500	V DC
Test voltage	3500	V AC

Temperature range

fixed installation - 50 ... + 120 °C

Min. bending radius

fixed installation cable diameter \leq 12 mm 3 x D
cable diameter $>$ 12 mm 4 x D
sporadic movement cable diameter \leq 12 mm 4 x D
cable diameter $>$ 12 mm 5 x D

NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours.

The lower temperature limit is determined by bending and elongation tests according to EN60811-504/505, respectively low temperature behaviour tests according to GOST 20.57.406-81, method 204-1 and GOST 17491-80.

The specified bending radii require a careful and proper handling using proven fastening technologies.



Traction cable

RADOX TENUIS-TW 600V MM

The cables are in conformity with:

Fire protection on railway vehicles, category	Ia, Ib, II	BS 6853, GM/RT 2130
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched	L ≤ 2.5 m	EN 50266, BS 6853 An. D.8.7
Smoke density	A ₀ ≤ BS 6853	BS 6853 An. D.8.7
Toxicity	R ≤ 1.0	BS 6853 An. B.1
Fire protection on railway vehicles, hazard level	HL1 - HL3	EN 45545
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 50305, 9.1.1 (EN 60332-3-25)
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 70 %	EN 61034-2
Toxicity	ITC ≤ 6	EN 50305, 9.2
Fire protection on railway vehicles, level of protection	1 - 4	DIN 5510
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 60332-3-25
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 60 %	EN 61034-2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 50267-2-1
Content of fluorine	HF ≤ 0.1 %	EN 60684-2, 45.2
Toxicity, insulation	ITC ≤ 6	EN 50305, 9.2
Toxicity, filler and sheath	ITC ≤ 3	EN 50305, 9.2
Fire protection on railway vehicles, category	A1, A2, B	NF F16-101
Fire protection on railway vehicles, class	C / F1	NF F16-101
Vertical flame spread	50 < L ≤ 540 mm	NF C32-070, 2.1
Vertical flame spread, bunched	L ≤ 300 mm	NF C32-070, 2.2
Smoke index	I.F. ≤ 5	X10-702-2, NF X70-100-1
Fire protection on railway vehicles	Fulfilled	NFPA 130
Vertical flame spread, bunched	L ≤ 1.5 m	UL 1685, 12 (FT4 exp.)
Smoke density	TSR ≤ 150 m ² , PSRR ≤ 0.40 m ² /s ...	UL 1685, 12 (FT4 exp.)
Fire protection on railway vehicles, hazard level	LR1 - LR4	UNI CEI 11170
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 60332-3-25
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 70 %	EN 61034-2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 50267-2-1
Toxicity, insulation	ITC ≤ 6	EN 50305, 9.2
Toxicity, filler and sheath	ITC ≤ 3	EN 50305, 9.2
Fire protection on railway vehicles	Fulfilled	NFPA 130
Vertical flame spread, bunched	L ≤ 1.5 m	UL 1685, 12 (FT4 exp.)
Smoke density	TSR ≤ 150 m ² , PSRR ≤ 0.40 m ² /s ...	UL 1685, 12 (FT4 exp.)

Requirement of hazard level code M

(according to EN 50264-1 or EN 50306-1)

Extra low temperature	- 40°C
Extra oil resistance	IRM 902, 72h, 100°C
Extra fuel resistance	IRM 903, 168h, 70°C

Applicable documents:

581998 current rating for multi core cables



Traction cable

RADOX TENUIS-TW 600V MM

Construction 1) n x mm ²	Conductor Dia. _{nom.} mm	Core 2) Dia. _{nom.} mm	Cable Dia. mm	R ₂₀ 3) max. Ω/km	Fireload nom. kJ/m	Weight _{nom.}		H+S Part No.	
						Copper	Cable kg / 100m		
4x0.25	0.6	1.17	4.5 ± 0.3	88.5	322	0.9	3.0	85 064 923	
4x0.25	0.6	1.17	4.95 ± 0.15	88.5	385	0.9	3.6	85 024 776	4)
2x0.34	0.75	1.3	3.95 ± 0.3	54.7	236	0.7	2.4	85 027 193	
16x0.34 + 3x1	0.75 1.2	1.3 1.77	8.95 ± 0.3	54.7 20.0	1080	8.3	15.1	85 111 512	
2x0.5	0.9	1.42	4.4 ± 0.2	40.1	290	0.9	3.1	12 568 036	
3x0.5	0.9	1.42	4.6 ± 0.2	40.1	315	1.4	3.6	12 568 037	
4x0.5	0.9	1.42	5.0 ± 0.2	40.1	365	1.8	4.4	12 568 038	
5x0.5	0.9	1.42	5.5 ± 0.2	40.1	473	2.3	5.4	12 566 304	
6x0.5	0.9	1.42	6.0 ± 0.2	40.1	569	2.7	6.4	12 568 039	
9x0.5	0.9	1.42	7.3 ± 0.3	40.1	792	4.1	9.1	12 583 000	
10x0.5	0.9	1.42	7.3 ± 0.3	40.1	760	4.6	9.6	85 073 536	
12x0.5	0.9	1.42	7.6 ± 0.3	40.1	862	5.5	10.7	12 585 961	
15x0.5	0.9	1.42	8.6 ± 0.3	40.1	1102	6.9	13.5	12 583 667	
16x0.5	0.9	1.42	8.6 ± 0.3	40.1	1102	7.3	13.9	84 096 896	
25x0.5	0.9	1.42	10.5 ± 0.4	40.1	1623	11.5	20.9	12 583 001	
2x2x0.5	0.9	1.42	6.8 ± 0.3	40.1	630	1.8	6.4	12 568 040	
4x2x0.5	0.9	1.42	8.5 ± 0.3	40.1	966	3.6	10.3	12 568 041	
6x2x0.5	0.9	1.42	10.2 ± 0.4	40.1	1451	5.5	14.9	84 097 766	
5x(3x0.5)	0.9	1.42	14.1 ± 0.4	40.1	2880	11.3	31.9	12 583 566	5)
5x(3x0.5)	0.9	1.42	14.5 ± 0.4	40.1	3345	10.7	32.2	85 118 440	5)
6x(3x0.5)	0.9	1.42	14.6 ± 0.3	40.1	3135	13.6	35.0	12 584 344	6)
2x(6x0.5)	0.9	1.42	15.5 ± 0.5	40.1	3610	8.8	32.9	85 022 107	6)
2x0.75	1.1	1.62	4.75 ± 0.3	26.7	330	1.4	3.8	12 568 047	
3x0.75	1.1	1.62	5.15 ± 0.3	26.7	380	2.1	4.8	12 568 048	
3G0.75	1.1	1.62	5.15 ± 0.3	26.7	380	2.1	4.8	12 583 990	
4x0.75	1.1	1.62	5.6 ± 0.3	26.7	468	2.8	5.9	12 568 049	
4G0.75	1.1	1.62	5.6 ± 0.3	26.7	468	2.8	5.9	12 583 992	
5G0.75	1.1	1.62	5.75 ± 0.3	26.7	495	3.5	6.8	85 111 986	
6x0.75	1.1	1.62	6.75 ± 0.3	26.7	707	4.2	8.7	12 568 050	
8x0.75	1.1	1.62	7.8 ± 0.3	26.7	978	5.6	11.5	12 584 272	
10x0.75	1.1	1.62	8.1 ± 0.3	26.7	935	7.0	12.8	12 585 274	



Traction cable

RADOX TENUIS-TW 600V MM

Construction 1) n x mm ²	Conductor Dia.nom. mm	Core 2) Dia.nom. mm	Cable Dia. mm	R ₂₀ 3) max. Ω/km	Fireload nom. kJ/m	Weight nom.		H+S Part No.	
						Copper kg / 100m	Cable		
12x0.75	1.1	1.62	8.4 ± 0.3	26.7	1006	8.4	14.5	84 111 116	
36x0.75	1.1	1.62	14.1 ± 0.4	26.7	2600	25.5	41.6	85 070 303	
4x2x0.75	1.1	1.62	9.5 ± 0.3	26.7	1200	5.6	13.9	84 097 783	
5x(4x0.75)	1.1	1.62	18.3 ± 0.5	26.7	4700	20.6	53.8	12 853 090	7)
2x1	1.2	1.77	5.1 ± 0.2	20.0	370	1.8	4.5	12 568 052	
3x1	1.2	1.77	5.4 ± 0.2	20.0	434	2.7	5.6	12 568 053	
3G1	1.2	1.77	5.4 ± 0.2	20.0	434	2.7	5.6	85 093 498	
4x1	1.2	1.77	5.8 ± 0.2	20.0	445	3.6	6.7	12 568 054	
4G1	1.2	1.77	5.8 ± 0.2	20.0	445	3.6	6.7	85 106 526	
5x1	1.2	1.77	6.65 ± 0.3	20.0	580	4.5	8.7	85 072 779	
5G1	1.2	1.77	6.65 ± 0.3	20.0	580	4.5	8.7	85 103 631	
6x1	1.2	1.77	7.3 ± 0.3	20.0	814	5.4	10.5	12 568 055	
7x1	1.2	1.77	8.0 ± 0.3	20.0	994	6.3	12.4	12 585 459	
8x1	1.2	1.77	8.3 ± 0.3	20.0	1093	7.2	13.8	84 121 018	
9G1	1.2	1.77	8.65 ± 0.3	20.0	1101	8.1	15.0	85 110 070	
10x1	1.2	1.77	8.7 ± 0.3	20.0	1055	9.0	15.5	12 581 348	
12x1	1.2	1.77	9.1 ± 0.3	20.0	1151	10.8	17.7	12 584 271	
16x1	1.2	1.77	10.4 ± 0.4	20.0	1524	14.4	23.5	12 584 654	
19x1	1.2	1.77	11.6 ± 0.4	20.0	1925	17.2	28.4	12 585 980	
25x1	1.2	1.77	12.8 ± 0.4	20.0	2234	22.6	35.6	12 581 349	
37x1	1.2	1.77	15.7 ± 0.5	20.0	3000	33.5	52.5	85 095 097	
2x2x1	1.2	1.77	8.0 ± 0.3	20.0	886	3.6	9.6	12 583 421	
2x1.5	1.5	2.17	6.0 ± 0.3	13.7	520	2.6	6.4	12 568 098	
3x1.5	1.5	2.17	6.3 ± 0.3	13.7	572	3.9	7.8	12 568 099	
3G1.5	1.5	2.17	6.3 ± 0.3	13.7	572	3.9	7.8	12 582 026	
4x1.5	1.5	2.17	6.9 ± 0.3	13.7	650	5.2	9.6	12 568 100	
4G1.5	1.5	2.17	6.9 ± 0.3	13.7	650	5.2	9.6	12 583 172	
5x1.5	1.5	2.17	7.8 ± 0.3	13.7	884	6.6	12.2	12 581 350	
5G1.5	1.5	2.17	7.8 ± 0.3	13.7	884	6.6	12.2	12 582 027	
6x1.5	1.5	2.17	8.45 ± 0.3	13.7	1058	7.9	14.4	12 582 028	



Traction cable

RADOX TENUIS-TW 600V MM

Construction 1) n x mm ²	Conductor Dia.nom. mm	Core 2) Dia.-nom. mm	Cable Dia. mm	R ₂₀ 3) max. Ω/km	Fireload nom. kJ/m	Weight nom.		H+S Part No.
						Copper kg / 100m	Cable	
7x1.5	1.5	2.17	9.1 ± 0.3	13.7	1253	9.2	16.8	12 583 724
7G1.5	1.5	2.17	9.1 ± 0.3	13.7	1253	9.2	16.8	12 582 029
8x1.5	1.5	2.17	10.3 ± 0.4	13.7	1639	10.6	20.5	12 582 030
9G1.5	1.5	2.17	10.6 ± 0.4	13.7	1474	11.9	21.1	12 584 489
10x1.5	1.5	2.17	10.6 ± 0.4	13.7	1443	13.2	22.1	12 582 031
12x1.5	1.5	2.17	11.1 ± 0.4	13.7	1639	15.8	25.8	12 583 725
16x1.5	1.5	2.17	12.6 ± 0.4	13.7	2130	21.1	33.8	12 583 726
18x1.5	1.5	2.17	13.4 ± 0.4	13.7	2449	23.8	38.2	85 063 742
25x1.5	1.5	2.17	15.5 ± 0.5	13.7	3059	33.1	51.0	84 103 977
25G1.5	1.5	2.17	15.5 ± 0.5	13.7	3057	33.1	51.0	12 582 033
30x1.5	1.5	2.17	16.7 ± 0.5	13.7	3606	39.7	60.6	12 586 298
50x1.5	1.5	2.17	21.5 ± 0.5	13.7	5894	66.4	99.8	85 063 739
58x1.5	1.5	2.17	22.6 ± 0.5	13.7	6100	76.7	113.6	85 070 511
2x2.5	1.9	2.75	7.3 ± 0.3	8.21	766	4.4	9.8	12 568 101
3x2.5	1.9	2.75	7.8 ± 0.3	8.21	854	6.6	12.2	12 582 034
3G2.5	1.9	2.75	7.8 ± 0.3	8.21	854	6.6	12.2	12 582 035
4x2.5	1.9	2.75	8.7 ± 0.3	8.21	1049	8.8	15.5	12 566 306
4G2.5	1.9	2.75	8.7 ± 0.3	8.21	1051	8.8	15.6	12 583 173
5x2.5	1.9	2.75	9.4 ± 0.3	8.21	1249	11.0	18.7	12 581 346
5G2.5	1.9	2.75	9.4 ± 0.3	8.21	1249	11.0	18.7	12 585 007
6x2.5	1.9	2.75	10.6 ± 0.4	8.21	1628	13.2	23.2	12 581 347
7G2.5	1.9	2.75	11.5 ± 0.4	8.21	1960	15.4	27.3	12 583 995
16x2.5	1.9	2.75	15.8 ± 0.5	8.21	3239	35.3	54.6	85 002 904
18x2.5	1.9	2.75	16.8 ± 0.5	8.21	3712	39.7	61.6	85 063 743
20x2.5	1.9	2.75	17.6 ± 0.5	8.21	4126	44.1	68.1	12 585 070
30x2.5	1.9	2.75	20.9 ± 0.5	8.21	5418	66.2	97.5	12 584 363
36x2.5	1.9	2.75	22.5 ± 0.5	8.21	6408	79.6	115.8	12 584 406
4x4	2.4	3.35	10.2 ± 0.4	5.09	1442	14.0	22.9	12 585 458
10x4	2.4	3.35	16.0 ± 0.5	5.09	2108	34.9	55.2	85 084 353



Traction cable

RADOX TENUIS-TW 600V MM

Cables with coloured cores:

Construction 1) n x mm ²	Con- ductor Dia.nom mm	Core colours	Core 2) D _{nom} mm	Cable Dia. mm	R ₂₀ ³⁾ max Ω/km	Fireload nom. kJ/m	Weight Copper Cable kg/100m		H + S Part No.	
2V0.5	0.9	BN-BU	1.42	4.4 ± 0.2	40.1	290	0.9	3.1	12 584 136	
3V0.5	0.9	BN-BK- BU	1.42	4.6 ± 0.2	40.1	315	1.4	3.6	12 584 137	
4V0.5	0.9	BN-BK- BU-WH	1.42	5.0 ± 0.2	40.1	365	1.8	4.4	12 584 138	
5V0.5	0.9	BN-BK- BU-WH- GY	1.42	5.5 ± 0.2	40.1	473	2.3	5.4	12 585 752	
6V0.5	0.9	BN-RD- WH-BK- GY-BU	1.42	6.0 ± 0.2	40.1	568	2.8	6.4	84 118 473	
2V1	1.2	BU-RD	1.77	5.1 ± 0.2	20.0	370	1.8	4.5	84 090 409	

- 1) X: one colour, numbered
G: one green-yellow core, others one colour, numbered
V: various colours
2) Cores : Core details according to H+S Datasheet 564 264
3) R₂₀ : Conductor resistance according to EN 50306-2
4) increased sheath thickness
5) Triples screened, marking 10, 20, 30, 40, 50
6) Elements screened
7) Quad-core no.: 1,4,2,3/ 5,8,6,7/ 9,12,10,11/ 13,16,14,15/ 17,20,18,19

Colour Legend:

BK: black
BN: brown
RD: red
OG: orange
YE: yellow
GN: green
BU: blue
VT: violet
GNYE: green-yellow
GY: grey
WH: white
PK: pink
TQ: turquoise