

CAT. No.
57030-NSL


IEC 60320 (320) C-14 PLUG, STRAIGHT CORD GRIP, BLACK, BOX TYPE TERMINALS ACCEPT 14 AWG (2.5 mm)
CONDUCTORS, 2 POLE 3 WIRE GROUNDING
STANDARD: IEC60320 (320)

15 AMP 250 VOLT	APPROVALS / CERT'S.	CSA <input checked="" type="checkbox"/>	UL <input checked="" type="checkbox"/>
10AMP 250 VOLT	APPROVALS / CERT'S.	VDE <input checked="" type="checkbox"/>	

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION			
<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	35	6
BLUE	NEUTRAL	30	6
BROWN	LINE	30	6

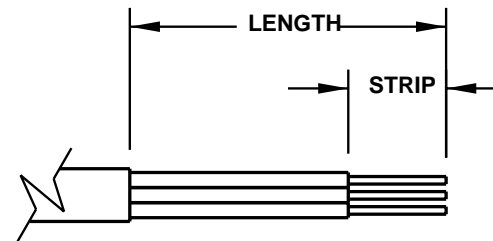

CORDAGE PREPARATION

