

CAT. No.  
57055-NS

IEC 60320 (C-13) IN-LINE CONNECTOR, 15 AMPERE-250 VOLT (C-UL-US), 10 AMPERE-250 VOLT (VDE), 2 POLE-3 WIRE GROUNDING. BLACK. TERMINALS ACCEPT 18AWG-14AWG CONDUCTORS. CORDAGE/STRAIN RELIEF= 7mm DIA. (0.276") APPROVALS= C(UL)US, VDE, CCC. CERTIFICATIONS= REACH, ROHS, CE.


15A 250V	APPROVALS	C-UL-US <input checked="" type="checkbox"/>
10A 250V	APPROVALS	VDE <input checked="" type="checkbox"/> CCC <input checked="" type="checkbox"/>
	STANDARDS	IEC 60320 C-13 <input checked="" type="checkbox"/> UL 498 <input checked="" type="checkbox"/>
	CERTIFICATIONS	REACH <input checked="" type="checkbox"/> ROHS <input checked="" type="checkbox"/> CE <input checked="" type="checkbox"/>

ALL DIMENSIONS ARE IN MILLIMETERS




MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION			
CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	35	6
BLUE	NEUTRAL	30	6
BROWN	LINE	30	6

RECOMMENDED TERMINAL TORQUE = 0.4-0.5 NEWTON METERS

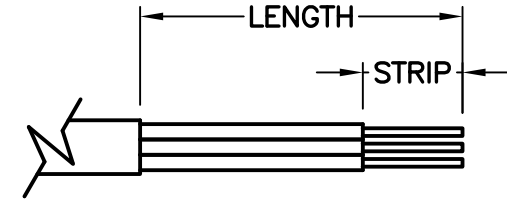

CORDAGE PREPARATION

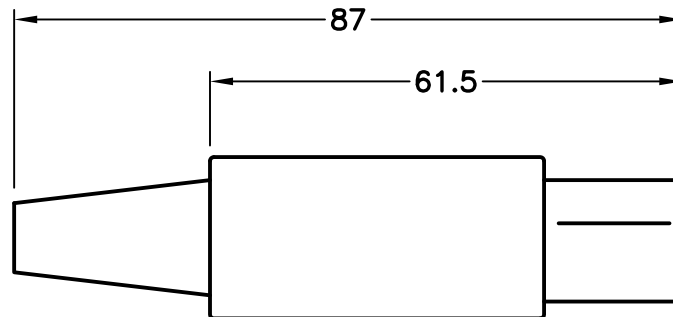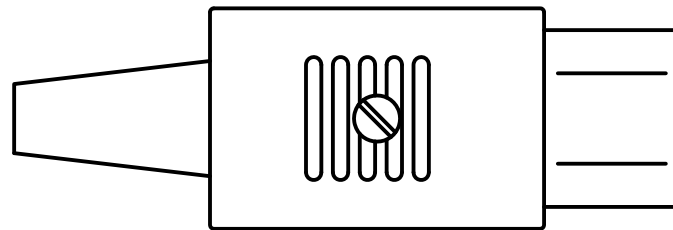

IEC 60320, C-13