



# Traction cable

## RADOX EN 50306-4 5E 300V MM S

### Product description:

**RADOX EN 50306-4 5E 300V MM S** Multipair cables, individually screened and sheathed  
 Nominal voltage: 300 / 500 V AC  
 Type of installation: Mechanically exposed  
 Hazard level: MM (extra low temperature resistant, extra oil and fuel resistant)

### General properties:


Halogen-free, electron-beam cross-linked cables with improved behaviour in case of fire, easy to strip, soldering resistant and flexible. Meets the requirements of the EN 50306-4 standard.

### Application:

The cores are intended for fixed installation inside railway vehicles or for installation in applications where limited alternating bending stresses occur during operation.

Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

### General composition of cable:

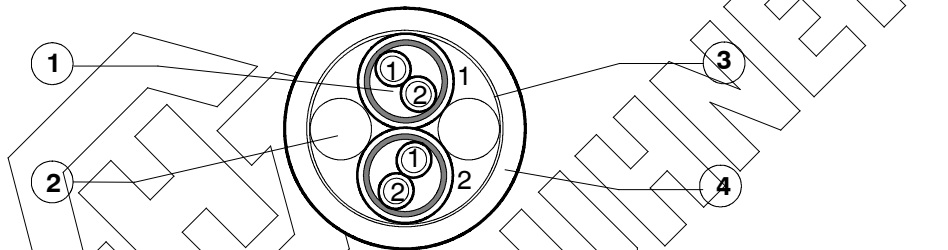

- |    |                       |   |   |
|----|-----------------------|---|---|
| 1. | EN 50306-2 300V pairs | Conductor:<br>Insulation:<br>2 cores<br>EMC-screen<br>Separator:<br>Sheath: | tin plated copper wire, acc. to EN 50306-2<br>RADOX EI 306<br>colour: white, black numbered 1/2<br>RADOX EN 50306-2 300V M, twisted<br>Tin plated copper braid<br>Tape<br>RADOX S2, colour : black, yellow numbered |
| 2. | Filler (optional)     | RADOX 125 REC   |   |
| 3. | Wrapping              | Plastic tape  |   |
| 4. | Sheath                | RADOX EM 104, colour: black, yellow marked                                  |   |

Marking: HUBER+SUHNER RADOX EN 50306-4 5E 300V nX[*cross section*] MM S 90 [part. No.]-[batch. No.] [date of manufacture]

### Technical data:

Voltage rating cond.-earth	$U_0$	300	V AC
Voltage rating cond.-cond.	$U$	500	V AC
maximum permissible Voltage rating AC cond.-earth		360	V AC
maximum permissible Voltage rating AC cond.-cond.	$U_m$	600	V AC
maximum permissible Voltage rating DC cond.-earth	$V_0$	450	V DC
maximum permissible Voltage rating DC cond.-cond.		750	V DC
Test voltage		2000	V AC
		4800	V DC

Temperature range ..... - 40 ... + 120 ..... °C

### Min. bending radius

fixed installation	cable dia. ≤ 12 mm	3 x D
	cable dia. > 12 mm	4 x D
sporadic movement	cable dia. ≤ 12 mm	4 x D
	cable dia. > 12 mm	5 x D

Copyright 2014 Huber + Suhner AG. This document may not be copied nor be passed on to third parties without our written permission.  
 Uncontrolled copy when printed (will not be updated).

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

**HUBER+SUHNER**

Wire+Cable Division

CH-8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com



# Traction cable

## RADOX EN 50306-4 5E 300V MM S

### NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours.

The lower temperature limit is determined by bending and elongation tests according to EN 60811-1-4 Par. 8.

The specified bending radii require a careful and proper handling using proven fastening technologies.

### The cables are in conformity with:

<b>Fire protection on railway vehicles, hazard level</b> .....	<b>HL1 - HL3</b> .....	<b>EN 45545</b>
Vertical flame spread .....	50 < L ≤ 540 mm .....	EN 60332-1-2
Vertical flame spread, bunched, 6 < D < 12 mm .....	L ≤ 2.5 m .....	EN 50305, 9.1.1 (EN 60332-3-25)
Vertical flame spread, bunched, D ≥ 12 mm .....	L ≤ 2.5 m .....	EN 60332-3-24
Smoke density .....	T ≥ 70 % .....	EN 61034-2
Toxicity .....	ITC ≤ 6 .....	EN 50305, 9.2
<b>Fire protection on railway vehicles, hazard level</b> .....	<b>1 - 4</b> .....	<b>DIN 5510</b>
Vertical flame spread .....	50 < L ≤ 540 mm .....	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm .....	L ≤ 1.5 m .....	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm .....	L ≤ 2.5 m .....	EN 50266-2-5 (EN 50305, 9.1.1)
Vertical flame spread, bunched, D ≥ 12 mm .....	L ≤ 2.5 m .....	EN 50266-2-4
Smoke density .....	T ≥ 60 % .....	EN 61034-2
Corrosivity of combustion gases* .....	pH ≥ 4.3, C ≤ 10 μS/mm .....	EN 50267-2-2
Amount of halogen acid gas* .....	HCl + HBr ≤ 0.5 % .....	EN 50267-2-1
Content of fluorine* .....	HF ≤ 0.1 % .....	EN 60684-2, 45.2
Toxicity, insulation .....	ITC ≤ 6 .....	EN 50305, 9.2
Toxicity, filler and wrapping .....	ITC ≤ 3 .....	EN 50305, 9.2
Toxicity, sheath .....	ITC ≤ 3 .....	EN 50305, 9.2

\* Insulation, filler, wrapping and sheath

<b>Fire protection on railway vehicles, category</b> .....	<b>A1, A2, B</b> .....	<b>NF F16-101</b>
Fire protection on railway vehicles, class .....	C / F0 .....	NF F16-101
Vertical flame spread .....	50 < L ≤ 540 mm .....	NF C32-070, 2.1
Vertical flame spread, bunched .....	L ≤ 300 mm .....	NF C32-070, 2.2
Smoke index .....	I.F. ≤ 5 .....	X10-702-2, NF X70-100-1

### Requirement of hazard level code M

(according to EN 50264-1 oder EN 50306-1)

Extra low temperature .....	- 40°C
Extra oil resistance .....	IRM 902, 72h, 100°C
Extra fuel resistance .....	IRM 903, 168h, 70°C

### Applicable documents:

- 585 536 Datasheet of cores
- 586 557 Current rating for single core cables



# Traction cable

## RADOX EN 50306-4 5E 300V MM S

Construction n x mm <sup>2</sup>	Conductor nom.		Core Dia. nom. mm	Screen nom.		Cable dia. mm	R <sub>20</sub> max. Ω/km	Z <sub>T</sub> max. mΩ/m	Fireload nom. kJ/m	Weight nom.		H + S Part No.
	Construction n x mm	Dia. mm		Dia. mm	Section mm <sup>2</sup>					Copper kg / 100m	Cable kg / 100m	
2 x 2 x 0.5	19 x 0.18	0.88	1.42	3.3	0.78	10.5±0.4	40.1	200	1665	3.4	13.8	12586124
3 x 2 x 0.5	19 x 0.18	0.88	1.42	3.3	0.78	11.2±0.4	40.1	200	1815	5.1	17	12586125
4 x 2 x 0.5	19 x 0.18	0.88	1.42	3.3	0.78	12.3±0.4	40.1	200	2180	6.8	19.7	12586126
7 x 2 x 0.5	19 x 0.18	0.88	1.42	3.3	0.78	14.3±0.4	40.1	200	2705	12.0	29.2	12586127
2 x 2 x 0.75	19 x 0.23	1.09	1.62	3.7	0.92	11.3±0.4	26.7	160	2010	4.7	18.4	12586128
3 x 2 x 0.75	19 x 0.23	1.09	1.62	3.7	0.92	12.0±0.4	26.7	160	1995	7.0	19.0	12586129
4 x 2 x 0.75	19 x 0.23	1.09	1.62	3.7	0.92	13.6±0.4	26.7	160	2700	9.4	26.6	12586130
7 x 2 x 0.75	19 x 0.23	1.09	1.62	3.7	0.92	15.8±0.5	26.7	160	2750	16.4	33.2	12586131
2 x 2 x 1	19 x 0.26	1.23	1.77	4.0	0.92	11.9±0.4	20.0	150	1980	5.5	17.5	12586132
3 x 2 x 1	19 x 0.26	1.23	1.77	4.0	0.92	12.7±0.4	20.0	150	2090	8.0	21.6	12586133
4 x 2 x 1	19 x 0.26	1.23	1.77	4.0	0.92	13.9±0.4	20.0	150	2540	11.0	25.5	12586134
7 x 2 x 1	19 x 0.26	1.23	1.77	4.0	0.92	16.2±0.5	20.0	150	3310	18.7	39.5	12586135
2 x 2 x 1.5	19 x 0.31	1.49	2.17	4.8	1.05	13.7±0.4	13.7	110	2740	7.4	25.5	12586136
3 x 2 x 1.5	19 x 0.31	1.49	2.17	4.8	1.05	14.4±0.4	13.7	110	2780	11.1	28.8	12586137
4 x 2 x 1.5	19 x 0.31	1.49	2.17	4.8	1.05	16.0±0.5	13.7	110	3475	15.0	34.9	12586138
7 x 2 x 1.5	19 x 0.31	1.49	2.17	4.8	1.05	19.2±0.5	13.7	110	4115	26.2	51.7	12586139

Cores: Tolerances of core diameter see H+S Datasheet 585536

R<sub>20</sub>: Conductor resistance according to EN 50306-2

HUBER