



Traction cable

RADOX 4 GWK-AX 1800V MM S

Product description:

RADOX 4 GWK-AX 1800V MM S Single and multicore cables, screened (overall screen)
 Nominal voltage: 1800 / 3000 V AC
 Hazard level: M (extra low temperature, extra oil and extra fuel resistant)


General features:

Halogen free, electron beam cross- linked cables with improved behaviour in case of fire, easy to strip, soldering iron resistant and flexible.

Application:

The cables are intended for permanent installation in rail vehicles or for applications in which a limited alternating bending stress occurs during service. Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

General composition of cable:

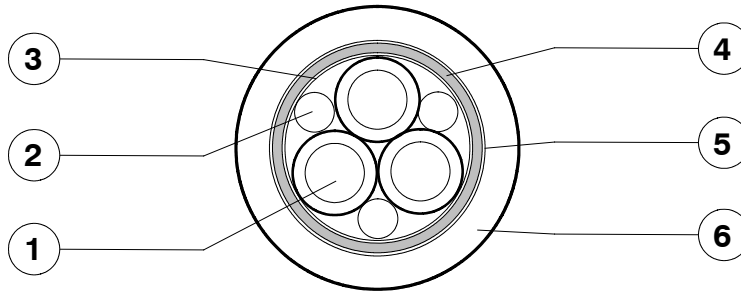

- | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> 1. RADOX 4 GWK-AX 1800V M cores 2. Filler (optional) 3. Wrapping 4. EMC- screen 5. Wrapping 6. Sheath | <p>Conductor: stranded tin plated copper, acc. to EN 60228 cl. 5
 Insulation: RADOX EI 110 / EI 109
 Colour: black, numbered</p> <p>RADOX 125 REC
 Tape
 Tin plated copper braid
 Tape
 RADOX EM 104, colour: black</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Marking:

[a] HUBER+SUHNER RADOX 4 GWK-AX 1800V [b] MM S [c]- [d] [e] [f] [g]

	example:
[a] Meter marking (in m)	= 1234 = m
[b] Construction	2X150
[c] Part number	12345678
[d] Batch number	1234567
[e] Production week and year	03- 2017
[f] Production place (only if China)	CN
[g] CRCC certification (only if available)	CRCC10218P11529R1M- 2

Copyright 2019 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG

Low Frequency Division

CH- 8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com



Traction cable

RADOX 4 GWK-AX 1800V MM S

Technical Data:

Voltage rating cond.- earth	U_0	1800	V AC
Voltage rating cond.- cond.	U	3000	V AC
maximum permissible Voltage rating AC cond.- earth	2100	V AC
maximum permissible Voltage rating AC cond.- cond.	U_m	3600	V AC
maximum permissible Voltage rating DC cond.- earth	V_0	2700	V DC
maximum permissible Voltage rating DC cond.- cond.	4500	V DC
Test voltage	6500	V AC
Temperature range	- 50 ...+ 120	°C
Min. bending radius						
fixed installation	cable diameter ≤ 12 mm	3 x D		
	cable diameter > 12 mm	4 x D		
sporadic movement	cable diameter ≤ 12 mm	4 x D		
	cable diameter > 12 mm	5 x D		

NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours. The lower temperature limit is determined by bending and elongation tests according to EN 60811-504/505, respectively low temperature behaviour tests for static conditions, e.g. for fixed installation according to GOST 20.57.406-81 - method 204-1 and GOST 17491-80.

The specified bending radii require a careful and proper handling using proven fastening technologies.



Traction cable

RADOX 4 GWK-AX 1800V MM S

The cables are in conformity with:

Fire protection on railway vehicles, hazard level	HL1 - HL3	EN 45545
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 50305, 9.1.1 (EN 60332-3-25)
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 70 %	EN 61034-2
Toxicity	ITC ≤ 6	EN 50305, 9.2
Fire protection on railway vehicles, level of protection	1 - 4	DIN 5510
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 60332-3-25
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 60 %	EN 61034-2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 50267-2-1
Content of fluorine	HF ≤ 0.1 %	EN 60684-2, 45.2
Toxicity	ITC ≤ 3	EN 50305, 9.2
Fire protection on railway vehicles, category	A1, A2, B	NF F16-101
Fire protection on railway vehicles, class	C / F0	NF F16-101
Vertical flame spread	50 < L ≤ 540 mm	NF C32-070, 2.1
Vertical flame spread, bunched	L ≤ 300 mm	NF C32-070, 2.2
Smoke index	I.F. ≤ 5	X10-702-2, NF X70-100-1
Fire protection on railway vehicles, hazard level	LR1 - LR4	UNI CEI 11170
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 60332-3-25
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 70 %	EN 61034-2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 50267-2-1
Toxicity, insulation	ITC ≤ 6	EN 50305, 9.2
Toxicity, filler and sheath	ITC ≤ 3	EN 50305, 9.2
Fire protection on railway vehicles, category	Ia, Ib, II	BS 6853, GM/RT 2130
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched	L ≤ 2.5 m	EN 50266, BS 6853 An. D.8.7
Smoke density	A ₀ ≤ BS 6853	BS 6853 An. D.8.7
Toxicity	R ≤ 1.0	BS 6853 An. B.1
Fire protection on railway vehicles	Fulfilled	NFPA 130
Vertical flame spread, bunched	L ≤ 1.5 m	UL 1685, 12 (FT4 exp.)
Smoke density	TSR ≤ 150 m ² , PSRR ≤ 0.40 m ² /s	UL 1685, 12 (FT4 exp.)
Requirement of hazard level code M	(acc. to EN 50264-1 or EN 50306-1)	
Extra low temperature	- 40°C	
Extra oil resistance	IRM 902, 72h, 100°C	
Extra fuel resistance	IRM 903, 168h, 70°C	

Applicable documents:

- H+S 557 578 Current rating for single core cables
- H+S 563 053 Current rating for multi core cables



Traction cable

RADOX 4 GWK-AX 1800V MM S

Table 1:

Construction ¹⁾ n x mm ²	Conductor dia. _{nom} mm	Core dia. ²⁾ nom. mm	Screen nom. dia. cross section		Cable dia. mm	R ₂₀ ³⁾ max. Ω/km	Z _T ⁴⁾ max. mΩ/m	C ⁵⁾ core/ core/ screen pF/m		Fire load nom. kJ/m	Weight nom. copper cable kg/100m		H+S Part No.
			mm	mm ²				core/ core	screen				
6x0.5	0.9	2.45	8.5	3.8	10.3±0.4	38.5	50	125	205	1465	6.5	17.2	85 006 150 ⁶⁾
(3x1)+7G1	1.2	3.0	16.5	8.9	20.4±0.5	20	25	-	-	5870	20	63	85 089 525
1x1.5	1.5	3.35	3.8	0.9	5.4±0.15	13.7	70	-	310	375	2.2	5.1	12 556 535
2x1.5	1.5	3.35	7.3	2.1	9.6±0.3	13.7	70	135	230	1260	4.8	14	12 552 642
3x1.5	1.5	3.35	8.0	3.3	10.5±0.4	13.7	40	140	235	1480	7.2	18	12 566 644
4x1.5	1.5	3.35	8.9	3.0	11.7±0.4	13.7	40	135	230	1870	8.3	22	85 023 676
5x1.5	1.5	3.35	10.5	5.5	13.4±0.4	13.7	40	130	225	2080	12	30	84 143 442
6x1.5	1.5	3.35	11.6	6.3	14.6±0.4	13.7	30	135	230	2730	15	34	12 564 185
8x1.5	1.5	3.35	14.0	8.3	17.4±0.5	13.7	30	120	200	4028	19	49	84 147 192
13x1.5	1.5	3.35	16.2	10.6	19.8±0.5	13.7	25	120	200	4629	28	64	84 147 191
1x2.5	1.9	3.75	5.6	1.5	6.1±0.15	8.21	70	-	230	450	3.6	7.0	12 556 536
2x2.5	1.9	3.75	8.3	3.8	10.8±0.4	8.21	70	155	260	1560	8.1	20	12 583 411
3x2.5	1.9	3.75	8.9	3.8	11.6±0.4	8.21	70	150	255	1700	10	23	12 564 186
4x2.5	1.9	3.75	10.3	5.6	13.0±0.4	8.21	70	145	250	2095	14	30	12 586 442
1x4	2.4	4.5	5.0	1.4	6.8±0.15	5.1	70	-	395	590	4.9	9.3	12 556 537
4x4	2.4	4.5	12.2	7.1	15.4±0.5	5.1	70	160	270	3020	21	43	12 568 683
1x6	2.9	5.2	5.7	1.6	7.7±0.15	3.39	70	-	420	755	6.7	12	12 556 538
3x6	2.9	5.2	12.2	7.1	15.4±0.5	3.39	70	170	285	3080	23	45	12 584 343
4x6	2.9	5.2	13.9	7.7	17.3±0.5	3.39	70	170	290	3790	29	56	12 586 443
1x10	3.9	6.4	7.0	2.1	9.2±0.2	1.95	80	-	490	1015	11	19	12 556 539
2x10	3.9	6.4	13.8	7.13	17.2±0.5	1.95	30	175	300	4087	26	54	85 068 014
3x10	3.9	6.4	14.8	8.3	18.3±0.5	1.95	30	210	355	4405	36	66	12 556 070
4x10	3.9	6.4	16.8	8.9	20.7±0.5	1.95	25	170	290	5485	84	45	84 109 368
1x16	5.3	8.4	9.11	3.5	11.3±0.2	1.24	70	-	535	1550	17	28	12 556 540
3x16	5.3	8.4	19.4	13.5	23.4±0.5	1.24	30	200	340	6670	54	103	12 564 357
4x16	5.3	8.4	22.1	18.0	26.6±0.6	1.24	20	180	300	8375	72	133	12 584 305
1x25	6.6	10.2	10.9	4.2	13.7±0.3	0.8	70	-	570	2150	25	41	12 556 541
3x25	6.6	10.2	23.6	19.4	28.4±0.6	0.8	30	205	350	10065	81	153	12 564 358
4x25	6.6	10.2	27.3	30.6	33.0±0.6	0.8	30	210	355	13410	116	210	12 563 356
1x35	7.8	11.7	12.4	5.1	15.1±0.3	0.57	70	-	610	2560	35	54	12 556 542



Traction cable

RADOX 4 GKW-AX 1800V MM S

Construction 1) n x mm ²	Conductor dia. _{nom} mm	Core dia. ²⁾ nom. mm	Screen nom. dia. cross section		Cable dia. mm	R ₂₀ ³⁾ max. Ω/km	Z _T ⁴⁾ max. mΩ/m	C ⁵⁾ core/ core/ screen pF/m		Fire load nom. kJ/m	Weight nom. copper cable kg/100m		H+S Part No.
			mm	mm ²				core/ core	screen				
2x35	7.8	11.7	24.8	19.4	29.8±0.6	0.57	20	225	380	11870	80	160	12 583 239
3x35	7.8	11.7	26.6	22.2	31.7±0.7	0.57	30	225	380	12340	112	200	12 561 687
3x35 +10	7.8 3.9	11.7 6.4	27.5	22.2	33.0±0.7	0.57 1.95	30	210	360	12800	122	214	12 563 359
4x35	7.8	11.7	30.9	33.2	37.2±0.7	0.57	20	210	360	16480	155	273	12 563 357
1x50	9.3	13.5	14.2	5.8	17.0±0.3	0.39	70	-	660	3030	53	71	12 556 543
2x50	9.3	13.5	28.9	30.6	34.3±0.6	0.39	20	240	405	14930	116	217	12 583 154
3x50 +10	9.3 3.9	13.5 6.4	31.0	33.2	37.0±0.7	0.39 1.95	30	230	390	13670	172	271	12 563 360
4x50	9.3	13.5	35.1	40.8	41.7±0.7	0.39	30	235	395	19890	217	360	12 552 458
1x70	11.4	15.8	16.7	8.3	19.5±0.3	0.28	70	-	760	3680	70	97	12 556 544
2x70	11.4	15.8	33.5	35.8	39.7±0.6	0.28	20	240	400	20270	159	360	85 002 075
3x70 +10	11.4 3.9	15.8 6.4	35.9	38.3	41.9±0.7	0.28 1.95	50	265	450	18740	230	365	12 551 966
4x70	11.4	15.8	41.4	40.8	47.9±0.7	0.28	60	250	425	25890	289	470	12 557 169
1x95	12.9	17.5	18.4	9.5	21.2±0.3	0.21	70	-	810	4195	88	119	12 556 545
1G95	12.9	17.5	18.4	9.5	21.2±0.3	0.21	70	-	810	4195	88	119	85074533
3x95	12.9	17.5	39.6	40.8	46.7±0.7	0.21	40	260	445	22783	278	434	85 074 100
3x95 +10	12.9 3.9	17.5 6.4	39.6	40.8	46.7±0.7	0.21 1.95	40	260	445	20270	291	438	12 559 402
1x120	14.9	19.8	20.9	13.7	23.6±0.3	0.16	70	-	860	5040	114	152	12 556 546
1x150	16.8	22.1	23.2	16.0	26.2±0.3	0.13	70	-	890	6590	143	188	12 556 547
1x185	18.3	24.0	25.1	16.0	28.2±0.3	0.11	70	-	900	7290	170	220	12 556 548
1x240	21.1	27.0	28.3	20.8	31.4±0.3	0.082	70	-	995	8215	221	279	12 556 549
1x300	23.7	29.9	31.2	22.2	34.6±0.4	0.065	70	-	1060	9700	276	345	12 558 471
1x400	27.3	34.1	35.9	35.7	39.5±0.5	0.05	70	-	1115	15320	380	480	84 134 935

- 1) X: one colour, numbered
G: one green- yellow core, others one colour, numbered
V: various colours
- 2) Core details see H+S Datasheet 543 850
- 3) Conductor resistance at 20 °C according to EN 60228
- 4) Transfer impedance for $f \leq 30$ Mhz
- 5) Capacity typical value
- 6) SPEC: reduced diameter