



## Traction cable

# RADOX DATABUS 120 OHM nx0.75 XM S

### Product description:

RADOX DATABUS 120 OHM

Cables with 0.75 mm<sup>2</sup> - cores, overall screen

Impedance:

120 Ohm

Hazard level:

M (extra low temperature resistant, extra oil and fuel resistant)


### General features:

Halogen-free, electron-beam cross-linked cables with improved behaviour in case of fire, easy to strip, soldering resistant and flexible. Cable for symmetrical data transmission with impedance of 120 Ohm with very good transmission properties at high frequencies.

### Application:

The cores are intended for fixed installation inside railway vehicles or for installation in applications where limited alternating bending stresses occur during operation.

Guidelines for selection and installation are described in the standard EN 50343.

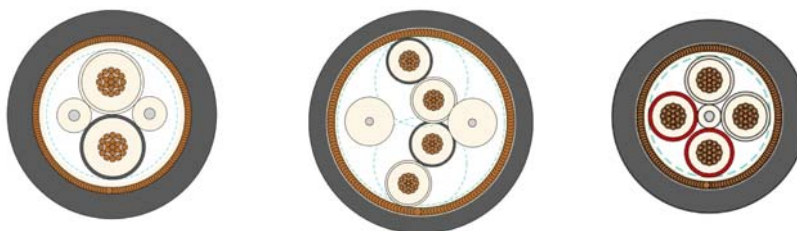

**Marking:** HUBER+SUHNER RADOX DATABUS 120 OHM [Construction] XM S [Part-No.] [Batch-No.] [Date of manufacture]

Construction [mm <sup>2</sup> ]	2x0.75	2x2x0.75	4x0.75
Part-No.	12 552 469	12 551 865	12 562 589
Cores			
Conductor	Tin plated copper wire		
Conductor Diameter nom. [mm]	1.09	1.09	1.09
Insulation of cores	RADOX FOAM		
Core Diameter nom. [mm]	2.65	2.65	2.3
Colours	WH- BK	WH- BK, num 1 WH- BK, num 2	WH- RD, num 1 WH- RD, num 2
<b>Construction of Cable</b>			
Twists of Cores	pair	pairs	quad
Fillers	PE- LD	PE- LD	PE- LD
Wrapping	Tape		
EMC - Screen	Tin plated copper braid		
Diameter over screen nom [mm]	6.5	10.6	6.8
Wrapping	Tape		
Sheath	RADOX EM 104 Colour: black		
Diameter [mm]	8.5 ± 0.3	12.8 ± 0.4	9.1 ± 0.3
Fireload [kJ/m]	855	1900	1195
Cable weight [kg/100 m]	9.7	21.2	12.8
Applications:			
WTB	X	X	X
UIC	X	X	

### Designation legend

X : Core insulation material is not defined in the standard EN 50264- 1

M : Sheet material EM 104 according to EN 50264- 1

S : Overall screen



## Traction cable

# RADOX DATABUS 120 OHM nx0.75 XM S

### Technical data:

Conductor resistance at 20°C	0.75 mm <sup>2</sup>	≤ 26.7	Ω / km
Insulation resistance at 20°C		> 100	MΩ · km
Capacitance	core / core	≤ 46	pF / m
Impedance <sub>nom.</sub>	f = 0.5 ... 2 MHz	120	Ω
Attenuation <sub>nom.</sub>	f = 1.0 MHz	10	dB / km
	f = 2.0 MHz	14	dB / km
Transferimpedance	f ≤ 20 MHz	≤ 20	mΩ/m
Voltage rating		300	V AC
Test voltage		2000	V AC
Temperature range	fixed installation	- 50 ... + 90	°C
Min. bending radius	fixed installation	4 x D	
	sporadic movement	5 x D	

### NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours. The lower temperature limit is determined by bending and elongation tests according to EN 60811-1-4 Par. 8, respectively low temperature behaviour tests for static conditions, e.g. for fixed installation according to GOST 20.57.406-81 - method 204-1 and GOST 17491-80.

The specified bending radii require a careful and proper handling using proven fastening technologies.

### The cables are in conformity with:

<b>Fire protection on railway vehicles, hazard level</b>	<b>1 - 4</b>	<b>DIN 5510</b>
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Smoke density	T ≥ 60 %	EN 61034-2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 50267-2-1
Content of fluorine	HF ≤ 0.1 %	EN 60684-2, 45.2
Toxicity	ITC ≤ 3	EN 50305, 9.2

### Requirement of hazard level code M

(according to EN 50264-1 or EN 50306-1)

Extra low temperature	- 40°C
Extra oil resistance	IRM 902, 72h, 100°C
Extra fuel resistance	IRM 903, 168h, 70°C