




- Permit the passage of air for ventilation and heat dissipation.
- Quick and easy installation with only fingertip pressure.
- Convex, matte finish head tapers to a thin edge.
- VP-500 through VP-875 have .094" (2,4 mm) diameter vent holes. All other sizes have .125" (3,2 mm) diameter vents.
- Lock firmly into panel up to .250" (6,4 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Multiple sizes for use in .500" (12,7 mm) to 4.000" (101,6 mm) diameter holes.
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.
- Heyco Louvered Plugs available, see page 5-3.

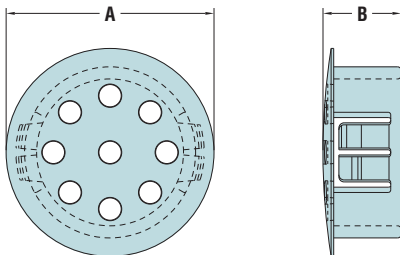

## Heyco® Vent Plugs and Thick Panel Vent Plugs

Mounting Hole Diameter Range: .500" (12,7 mm) to 4.000" (101,6 mm)

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	No. of Vent Holes	PART DIMENSIONS			
in.	mm.	Black	White			A Head Diameter		B Overall Height	
						in.	mm.	in.	mm.

### Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)

.500	12,7	<b>2637</b>	<b>2638</b>	VP 500	4	.56	14,2	.41	10,3
.562	14,3	<b>2647</b>	-	VP 562	4	.66	16,7		
.625	15,9	<b>2657</b>	<b>2658</b>	VP 625	5	.73	18,7		
.750	19,1	<b>2677</b>	<b>2678</b>	VP 750	8	.91	23,0		
.812	20,6	<b>2688</b>	<b>2689</b>	VP 812	8	.89	22,6	.45	11,5
.875	22,2	<b>2697</b>	<b>2698</b>	VP 875	9	1.02	25,8		
1.000	25,4	<b>2707</b>	<b>2708</b>	VP 1000	9	1.20	30,6		
1.093 - 1.125	27,8 - 28,6	<b>2726</b>	<b>2727</b>	VP 1093	9	1.22	30,9		
1.187	30,1	<b>2736</b>	<b>2737</b>	VP 1187	10	1.31	33,3	.47	11,9
1.250	31,7	<b>2743</b>	<b>2744</b>	VP 1250	10	1.38	34,9		
		<b>2797</b>	-	SVP 1250-4	4				
1.375	34,9	<b>2756</b>	<b>2757</b>	VP 1375	11	1.50	38,1	.47	11,9
1.500	38,1	<b>2766</b>	<b>2767</b>	VP 1500	13	1.67	42,4		
1.750	44,5	<b>2776</b>	<b>2777</b>	VP 1750	13	1.91	48,4		
2.000	50,8	<b>2786</b>	<b>2787</b>	VP 2000	19	2.14	54,4	.47	11,9

### Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)

.500	12,7	<b>3010</b>	<b>3011</b>	VPT 500	4	.58	14,7	.56	14,3
.625	15,9	<b>3013</b>	<b>3014</b>	VPT 625	5	.73	18,7		
.750	19,1	<b>2426</b>	<b>2427</b>	VPT 750	8	.91	23,0		
.875	22,2	<b>3152</b>	<b>3153</b>	VPT 875	9	1.02	25,8		
1.000	25,4	<b>3154</b>	<b>3155</b>	VPT 1000	9	1.20	30,6	.58	14,7
1.093 - 1.125	27,8 - 28,6	<b>3032</b>	<b>3033</b>	VPT 1093	9	1.22	30,9		
1.187	30,1	<b>3160</b>	<b>3161</b>	VPT 1187	10	1.31	33,3		
1.250	31,7	<b>3034</b>	<b>3035</b>	VPT 1250	10	1.38	34,9		
1.375	34,9	<b>3036</b>	<b>3037</b>	VPT 1375	11	1.50	38,1	.75	19,1
1.500	38,1	<b>3156</b>	<b>3157</b>	VPT 1500	13	1.67	42,4		
1.750	44,5	<b>3038</b>	<b>3039</b>	VPT 1750	13	1.91	48,4		
2.000	50,8	<b>3158</b>	<b>3159</b>	VPT 2000	19	2.14	54,4	.75	19,1
2.500	63,5	<b>2793</b>	<b>2794</b>	VP 2.5	19	2.72	69,0	.74	18,8
3.000	76,2	<b>2458</b>	<b>2459</b>	VP 3.0	26	3.15	80,0	.75	19,1
3.500	88,9	<b>2467</b>	<b>2468</b>	VP 3.5	38	3.66	92,9		
4.000	101,6	<b>2476</b>	<b>2477</b>	VP 4.0	48	4.16	105,6		

Standard color black. Consult Heyco for other colors.

Quick  
Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E51579 Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)