


Web site: www.marinco.com
Phone: 800-307-6702
Date: February, 2013 Rev: 02

Connector, locking
50A, 125/250V
3-Pole, 4-Wire

Catalog Number: 6364CRN

Item: Connector, locking, corrosion resistant
Rating: 50 amperes, 125/250 volts, 3-pole, 4 wire.
Configuration: NEMA SS-2
Materials: All rigid plastic parts are nylon with CTI greater than 600 volts.
Current-carrying metal parts are nickel-plated brass. Assembly and cord clamp screws are stainless steel.
Color: Yellow housing
Terminals: Terminals have 5/16" screws with Perma-Lock™ collar to encapture the wire strands. The terminal screw does not bear down on the wire.
Cord Clamp: Internal, self centering. Accommodates cable up to 1.2" (6/4 S).
Contacts: Line contacts are solid brass, two-piece construction, secured by two solid rivets. Rigid half is 0.10" thick. Spring half is 0.04" thick. Grounding contact is 0.20" thick plate mounted on side of connector body.
Overall Design: Two assembly screws
Dust seal at cord entry
Beveled housing
Corrosion resistant
Operating Temp.: -40°C to +75°C (without impact).
Listings: UL listed, File E57672
CSA certified, File LR81290
Dimensions:

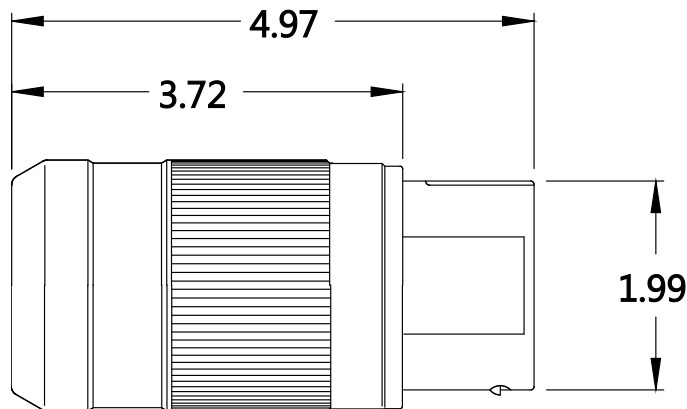

Dimensions shown in inches