



## Heyco® Thick Panel Rubber Grommets

For Panels .250" (6,4 mm) to .375" (9,5 mm) Thick

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	MATERIAL	PART DIMENSIONS					
in.	mm.				A Inside Diameter		B Head Diameter		C Overall Height	

For .250" (6,4 mm) Thick Panels


.312	7,9	<b>G1023</b>	RG 312-6-8	SBR	.19	4,8	.44	11,1	.38	9,5
.437	11,1	<b>G1058</b>	RG 437-8-8	Nitrile	.25	6,4	.63	15,9		
.500	12,7	<b>G1086</b>	RG 500-10-8	Nitrile	.31	8,0	.63	15,9	.63	15,9
		<b>G1095</b>	RG 500-12-8	SBR	.38	9,5	.75	19,1		
.562	14,3	<b>G1117</b>	RG 562-10-8	Nitrile	.31	8,0	.81	20,6	.50	12,7
.625	15,9	<b>G1134</b>	RG 625-12-8	SBR	.38	9,5	.88	22,2		
.687	17,5	<b>G1154</b>	RG 687-14-8	SBR	.44	11,1	.94	23,8		
.812	20,6	<b>G1195</b>	RG 812-16-8	SBR	.50	12,7	1.06	27,0		
		<b>G1200</b>	RG 812-18-8	SBR	.56	14,3				
.875	22,2	<b>G1220</b>	RG 875-20-8	SBR	.63	15,9	1.13	28,6		
1.000	25,4	<b>G1257</b>	RG 1000-22-8	SBR	.69	17,5	1.31	33,3	.56	14,3
		<b>G1264</b>	RG 1000-28-8	SBR	.88	22,2	1.25	31,8		
1.062	27,0	<b>G1273</b>	RG 1062-24-8	SBR	.75	19,1	1.38	34,9	.56	14,3
1.125	28,6	<b>G1279*</b>	RG 1125-26-8	SBR	.80	20,4	1.38	34,9		
1.250	31,8	<b>G1301</b>	RG 1250-24-8	SBR	.75	19,1	1.63	41,3	.44	11,1
		<b>G1307</b>	RG 1250-28-8	SBR	.88	22,2	1.63	41,3		
1.375	34,9	<b>G1324</b>	RG 1375-32-8	SBR	1.00	25,4	1.75	44,5	.63	15,9
1.500	38,1	<b>G1353</b>	RG 1500-40-8	SBR	1.25	31,8	1.75	44,5		
		<b>G1354</b>	RG 1500-40-8A	SBR	1.25	31,8	2.00	50,8		
1.750	44,5	<b>G1373</b>	RG 1750-48-8	SBR	1.50	38,1	2.00	50,8	.50	12,7
		<b>G1374</b>	RG 1750-48-8A	SBR	1.50	38,1	2.13	54,0		
2.000	50,8	<b>G1393</b>	RG 2000-56-8	SBR	1.75	44,5	2.50	63,5	.53	13,5
		<b>G1394</b>	RG 2000-56-8A	Nitrile	1.75	44,5	2.50	63,5		
2.500	63,5	<b>G1421</b>	RG 2.5-64-8	SBR	2.00	50,8	3.00	76,2	.56	14,3
		<b>G1425</b>	RG 2.5-72-8	SBR	2.25	57,2	3.00	76,2		

For .375" (9,5 mm) Thick Panels

.375	9,5	<b>G1043</b>	RG 375-10-12	SBR	.31	8,0	.56	14,3	.50	12,7
.500	12,7	<b>G1096</b>	RG 500-12-12	SBR	.38	9,5	.63	15,9		
.562	14,3	<b>G1121</b>	RG 562-12-12	SBR	.38	9,5	.75	19,1	.63	15,9
.625	15,9	<b>G1136</b>	RG 625-13-12	SBR	.41	10,3	.81	20,6		
.750	19,1	<b>G1182</b>	RG 750-16-12	SBR	.50	12,7	1.00	25,4		
.875	22,2	<b>G1214</b>	RG 875-18-12	SBR	.56	14,3	1.06	27,0		
.968	24,6	<b>G1232</b>	RG 968-22-12	SBR	.69	17,4	1.31	33,3		
1.000	25,4	<b>G1249</b>	RG 1000-18-12	SBR	.56	14,3	1.25	31,8	1.13	28,6
1.125	28,6	<b>G1278</b>	RG 1125-24-12	SBR	.75	19,1	1.63	41,3		
1.250	31,8	<b>G1308</b>	RG 1250-28-12	Neoprene	.88	22,2	1.75	44,5	.75	19,1
		<b>G1314</b>	RG 1250-32-12	SBR	1.00	25,4	1.50	38,1		
1.375	34,9	<b>G1326</b>	RG 1375-32-12	SBR	1.00	25,4	1.75	44,5	.75	19,1
1.750	44,5	<b>G1375</b>	RG 1750-48-12	SBR	1.50	38,1	2.13	54,0		
2.000	50,8	<b>G1395</b>	RG 2000-56-12	SBR	1.75	44,5	2.50	63,5	.63	15,9
2.500	63,5	<b>G1427</b>	RG 2.5-72-12	SBR	2.25	57,2	3.00	76,2		

Standard color black. \*G1279 Panel Thickness is .257" (6,5 mm)

- **Used to protect through holes.** Help eliminate sharp edges so your wires are protected and add aesthetic value to your application.
- 40 sizes available that accommodate mounting holes ranging from .312" (7,9 mm) to holes as large as 2.50" (63,5 mm) in diameter and panel thicknesses of .250" (6,4 mm) and .375" (9,5 mm).
- Rubber grommets are constructed of SBR (unless otherwise noted) with an operating temperature range of -40°F (-40°C) to 221°F (105°C).
- SBR grommets have good water resistant characteristics and are suitable for most moderate chemicals and wet or dry organic acids.
- Provide vibration dampening.

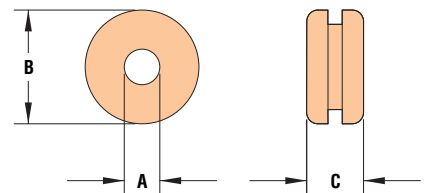

Material: SBR, Nitrile or Neoprene  
 Temperature Range: -40°F (-40°C) to 221°F (105°C)

Quick Specs