

Heyco® Grommet Channels

TPE "DS" Channel - Unserrated, MDS* Filled




FIT PANEL THICKNESS RANGE				PART NO.	DESCRIPTION	PART DIMENSIONS					
Minimum		Maximum				A Overall Height		B Length			
in.	mm.	in.	mm.			in.	mm.	in.	M.		
48" (122 cm) Strip				Gray							
.031	0,8	.062	1,6	12430	DS-062-48"	.30	7,6				
.020	0,5	.125	3,2	12431	DS-125-48"	.38	9,5				
.031	0,8	.188	4,8	12432	DS-188-48"	.50	12,7	48		1.22	
.045	1,1	.250	6,4	12433	DS-250-48"	.63	15,9				
100' (30.5 M) Roll											
.031	0,8	.062	1,6	12430R	DS-062-1200"	.30	7,6				
.020	0,5	.125	3,2	12431R	DS-125-1200"	.38	9,5	1200		30.5	

- This flexible Grommet Channel is ideal for protecting panel edges from being damaged.
- For use as wear strips, non-abrasive edging, noise-reducing conveyor strips, framing, or to protect from sharp edges.
- Good durability; MDS glue filling adheres to rubber, most plastics, wood and metal.
- Features built-in lubricant for reduced friction and longer part life.

Standard color gray.

*Cyanoacrylate adhesive, also known as "super glue", features rapid setup time.

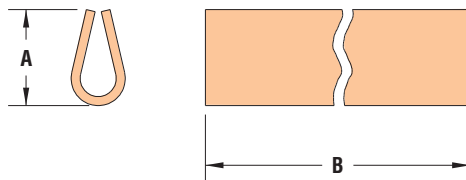


Polystyrene Channel - 4' (122 cm) Lengths

FIT PANEL THICKNESS	PART NO. White	DESCRIPTION	PART DIMENSIONS								STYLE	
			A Overall Height		B Top Width		C Bottom Width		D Length			
in.	mm.		in.	mm.	in.	mm.	in.	mm.	in.	cm.		
.050	1,3	12443	PCH-015X050-48"	.44	11,1	.02	0,4	.05	1,3			1
.141	3,6	12444	PCH-020X141-48"	.56	14,3	.02	0,5	.14	3,6	48	122	2
.250	6,4	12445	PCH-200X250-48"	.38	9,5	.20	5,1	.25	6,4			1

- Binds and frames sharp edges.
- May be cut to desired lengths.
- Available by special order only, consult Heyco.

Standard color white.

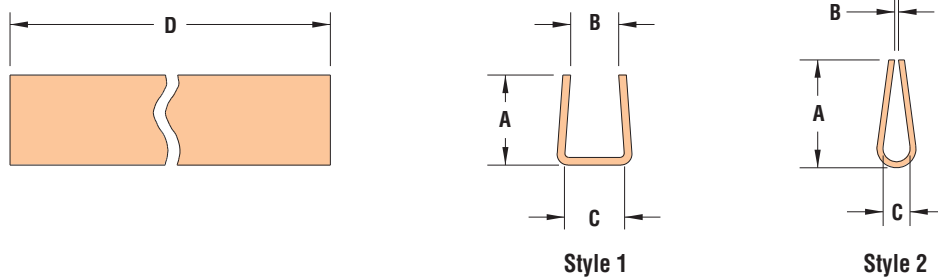

Material	PA66/6 MDS Filled Nylon or High Impact Polystyrene
Flammability Rating	94HB
Temperature Range	-40°F (-40°C) to 149°F (65°C) (DS Series) -4°F (-20°C) to 122°F (50°C) (PCH Series)

Quick Specs