



NOTES:

1. MUST BE U.L. AND C.S.A. LISTED FOR MOTOR LEAD APPLICATION AND MARKED PER U.L. AND C.S.A. REQUIREMENTS UNLESS NOTED OTHERWISE.
2. SEE PRODUCT SUMMARY OR CUT LEAD FRONT FOR CUT AND STRIP DIMENSIONS AND TOLERANCES.
3. ON ALL 105° C THERMOPLASTIC LEAD MATERIAL AT 20° C, NO BREAKAGE IS TO OCCUR WHEN WRAPPED AROUND THE FOLLOWING DIMENSIONS IN THE MANNER SHOWN:
18 AWG 1524 WALL - 1/4 BANGOR
18 AWG 464 WALL - 5/16 BANGOR
4. ALL THERMOPLASTIC LEAD POLYVINYL CHLORIDE.



DETAIL OF PREFERRED STYLE OF IDENTIFICATION RIBBING.

5. FOR OZARK ONLY - OZARK MATERIAL IS TO BE MARKED WITH TYPE, TEMPERATURE RATING, IDENTIFICATION OF MANUFACTURE AND U.L. AND C.S.A. MARKS. THIS MARKING IS OPTIONAL ON HPR MATERIAL.
7. NO CHANGES TO BE MADE BY SUPPLIER WITHOUT WRITTEN APPROVAL OF PASCO ENGINEERING.

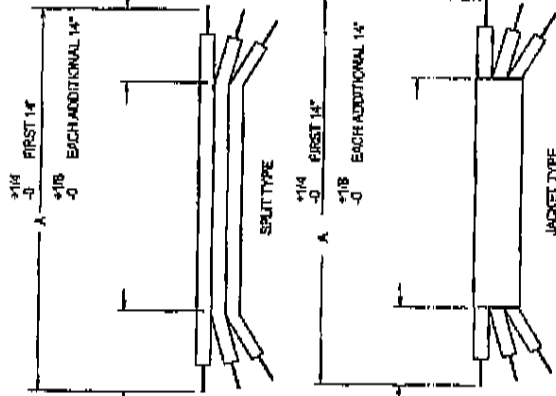

SEE PRODUCT SUMMARY

SEE PRODUCT SUMMARY


REV	DESCRIPTION	DATE	APPROVED
12	CHANGE CONSTRUCTION OF 8948 6362	8-15-04	LDOLDC
9	REVISE 8948 6374	6-22-00	JAKRWS
10	8948 6363 WAS POLY FILLER	3-23-01	LDGRWS
11	REVISE 8948 6362 AND SIZE CONVERSION	9-8-03	LDOLDC

PART NUMBER	REV	COLOR	U.L. TYPE	SIZE (A W)	STRANDING	INSULATION THICKNESS	NOMINAL O.D.	VOLTAGE RATING	TEMPERATURE	VIEWS OR THICKNESS	CONSTRUCTION
8948 6275	1	1 WHITE 1 BLACK 1 50% GREEN 1 50% YELLOW ± 10%	SLOW	18	16/0	2/64	.360	300	50° C	2/64	BUNCH STRANDED TINNED COPPER RIBBER, TWISTED ASSEMBLY, FILLER, PAPER WRAP, PAPER WRAP, JACKET COLOR BLACK, BOTH INSULATION AND JACKET RED. YELLOW STRIPES OF EQUAL WIDTH. YELLOW STRIPES SHALL COVER 50% TO 60% OF THE LEAD SURFACE. YELLOW STRIPES SHALL BE STRAIGHT OR HELIX ON LEAD SURFACE. THE HELIX PITCH SHALL BE 1 TO 1.5 INCHES PER REVOLUTION. COLOR INFORMATION IS FOR CLASSVILLE AND OZARK ONLY. C.S.A. LISTING NOT REQUIRED.
8948 6376	0	1 BLUE 1 BROWN 1 GREEN	SJT	18	16/20	2/64	.350	300	105° C	2/64	BUNCH STRANDED COPPER, PVC TWISTED ASSEMBLY, FILLER, PAPER WRAP, THERMOPLASTIC JACKET COLOR BLACK.
8948 6277	1	1 BLACK	SPT-3	18	4/64	4/64	.170 X .375	300	105° C	7/64	BUNCH STRANDED COPPER, THERMOPLASTIC INSULATION, FIBERGLASS INSULATION, CENTER GROUND LEAD TO HAVE GREEN INTERNAL INSULATION WITH BLACK OUTER INSULATION.
8948 6363	2	1 BLUE 1 BROWN 1 50% GREEN 1 50% YELLOW ± 10%	SVT	13	4/104	1/64	.265	300	105° C	2/64	BUNCH STRANDED SOFT BARE COPPER, PAPER FILLER, THERMOPLASTIC JACKET COLOR BLACK.
8948 6362	2	1 WHITE 1 BLACK 1 RED	SLOW	18	16/20	2/64	.306	300	80° C		BARE COPPER CONDUCTOR, SEPARATOR, 125° C EPDM INSULATION, CONDUCTORS TWISTED WITH FILLER, PAPER WRAP, 80° C OPE MATERIAL, JACKET COLOR BLACK.
8948 6364	1	1 WHITE 1 BLACK 1 GREEN	SJT	16	26/0	2/64	.330	300	105° C	2/64	BUNCH STRANDED COPPER, PVC TWISTED ASSEMBLY, FILLER, PAPER WRAP, THERMOPLASTIC JACKET COLOR BLACK.
8948 6374	1	1 WHITE 1 BLACK 1 GREEN	SEOW	18	26/20	2/64	.360	600	105° C	2/64	BUNCH STRANDED COPPER, THE COMPOUND TWISTED ASSEMBLY, FILLER, PAPER WRAP, THE COMPOUND JACKET COLOR BLACK.

CONTRACT NO.		PASCO INDUSTRIES, INC.	
DATE FOR APPROVAL	DATE FOR ORDER	ELDON PLANT	
APPROVAL	DATE	TITLE	
DESIGN	DATE	LEAD MATERIAL, 3 CONDUCTOR	
CHECKED	DATE	SIZE	REV
DESIGNED	DATE	B	12
SCALE	SCALE	DATE	DATE
SCALE	SCALE	DATE	DATE


262 782-5913
To Tom

NOTES:

- MUST BE UL AND C.S.A. LISTED FOR MOTOR LEAD APPLICATION AND MARKED PER UL AND C.S.A. REQUIREMENTS UNLESS NOTED OTHERWISE.
- SEE PRODUCT SUMMARY OR CUT LEAD PRINT FOR CUT AND STRIP DIMENSIONS AND TOLERANCES.
- ON ALL 105° C THERMOPLASTIC LEAD MATERIAL AT 20° C, NO BREAKAGE IS TO OCCUR WHEN WRAPPED AROUND THE FOLLOWING MANDRELS:
18 AWG 1/32 WALL - 1/4" MANDREL
18 AWG 4/64 WALL - 5/16" MANDREL
- ALL THERMOPLASTIC LEAD POLYMER CHLORIDE
- 

6 RIBS, .015 HIGH
- DETAIL OF PREFERRED STYLE OF IDENTIFICATION RIBBING.
- FOR OZARK ONLY - CONDUIT MATERIAL IS TO BE MARKED WITH TYPE, TEMPERATURE RATING, IDENTIFICATION OF MANUFACTURE, AND UL AND C.S.A. MARKS. THIS MARKING IS OPTIONAL ON HPN MATERIAL.
- NO CHANGES TO BE MADE BY SUPPLIER WITHOUT WRITTEN APPROVAL OF FASCO ENGINEERING.

SEE PRODUCT SUMMARY

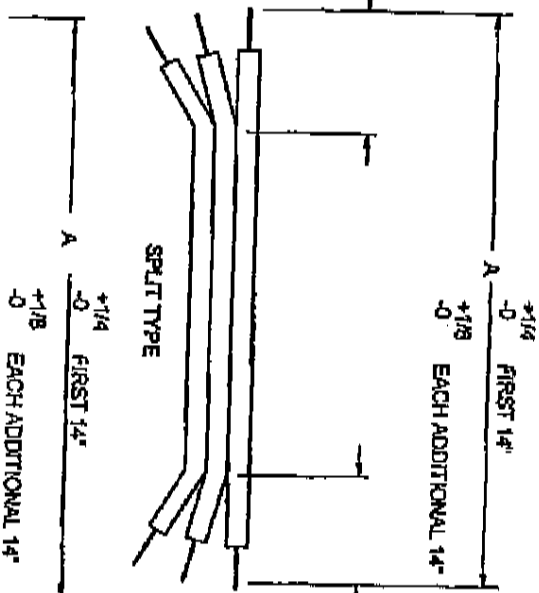

DIMENSIONS TO BE DETERMINED BY PRODUCTION

C600 0060	
REV 4	12
LM	

ECNO	R
639624	
625908	
628162	
621716	

PART NUMBER	REV.	COLOR	U.L. TYPE	SIZE A/W.G. (B & S)	STRANDING	INSULATION THICKNESS	NOMINAL O.D.	VOLTAGE RATING	TEMPERATURE RATING	WEBB OR JACKET THICKNESS
8948 6275	1	1 WHITE 1 BLACK 1 50% GREEN 1 50% YELLOW ± 10%	SLDW	18	18/30	2/64	.350	300	90° C	2/64
8948 6278	0	1 BLUE 1 BROWN 1 GREEN	SLT	18	18/30	2/64	.350	300	105° C	2/64
8948 6277	1	BLACK	SPT-3	18	4/134	4/64	.170 X .375	300	105° C	7/64
8948 6353	2	1 BLUE 1 BROWN 1 50% GREEN 1 50% YELLOW ± 10%	SVT	18	4/134	1/64	.255	300	105° C	2/64
8948 6392	2	1 WHITE 1 BLACK 1 RED	SLDW	18	18/30	2/64	.305	300	90° C	
8948 6364	1	1 WHITE 1 BLACK 1 GREEN	SLT	18	28/30	2/64	.330	300	105° C	2/64
8948 6374	1	1 WHITE 1 BLACK 1 GREEN	SEOW	18	28/30	2/64	.390	600	105° C	2/64

TEMPERATURE
5. THIS MARKING

OF FASCO

CONSTRUCTION

PART NUMBER	REV.	COLOR	U.L. TYPE	SIZE A.W.G. (B & S)	STRANDING	INSULATION THICKNESS	NOMINAL O.D.	VOLTAGE RATING	TEMPERATURE RATING	WEBB OR JACKET THICKNESS	CONSTRUCTION
8948 6275	1	1 WHITE 1 BLACK 1 50% GREEN 50% YELLOW ± 10%	SLOW	18	16/30	2/64	.350	300	90° C	2/64	BUNCH STRANDED TWINED COPPER, RUBBER TWISTED ASSEMBLY, FILLER PAPER WRAP, NEOPRENE JACKET COLOR BLACK. BOTH INSULATION AND JACKET NEO. 90° C TO BE ON JACKET. COLOR IS GREEN WITH 1 TO 3 CONTINUOUS, UNBROKEN, YELLOW STRIPES OF EQUAL WIDTH. YELLOW STRIPES SHALL COVER 40% TO 60% OF THE LEAD SURFACE. YELLOW STRIPES SHALL BE STRAIGHT OR HELICAL ON LEAD SURFACE. THE HELICAL PITCH SHALL BE 1 TO 1.5 INCHES PER REVOLUTION. COLOR INFORMATION IS FOR CASSIYLE AND OZARK ONLY. C.S.A LISTING NOT REQUIRED.
8948 6276	0	1 BLUE 1 BROWN 1 GREEN	SJT	18	16/30	2/64	.350	300	105° C	2/64	BUNCH STRANDED COPPER, PVC TWISTED ASSEMBLY, FILLER, PAPER WRAP, THERMOPLASTIC JACKET COLOR BLACK.
8948 6277	1	BLACK	SPT-3	18	41/34	4/64	.170 X .375	300	105° C	7/64	BUNCH STRANDED COPPER, THERMOPLASTIC INSULATION, PARALLEL CONSTRUCTION, CENTER GROUND LEAD TO HAVE GREEN INTERNAL INSULATION WITH BLACK OUTER INSULATION.
8948 6333	2	1 BLUE 1 BROWN 1 50% GREEN 50% YELLOW ± 10%	SVT	18	41/34	1/64	.255	300	105° C	2/64	BUNCH STRANDED SOFT BARE COPPER, PAPER FILLER, THERMOPLASTIC JACKET COLOR BLACK.
8948 6382	2	1 WHITE 1 BLACK 1 RED	SLOW	18	16/30	2/64	.305	300	80° C		BARE COPPER CONDUCTOR, SEPARATOR, 125° C EPDM INSULATION, CONDUCTORS TWISTED WITH FILLER, PAPER WRAP, 90° C OZE MATERIAL, JACKET COLOR BLACK.
8948 6384	1	1 WHITE 1 BLACK 1 GREEN	SJT	16	29/30	2/64	.330	300	705° C	2/64	BUNCH STRANDED COPPER, PVC TWISTED ASSEMBLY, FILLER, PAPER WRAP, THERMOPLASTIC JACKET COLOR BLACK.
8948 6374	1	1 WHITE 1 BLACK 1 GREEN	SECW	18	28/30	2/64	.360	600	105° C	2/64	BUNCH STRANDED COPPER, THE COMPOUND TWISTED ASSEMBLY, FILLER PAPER WRAP, THE COMPOUND JACKET COLOR BLACK.

DIMENSIONS TO
BE DETERMINED
BY PRODUCTION



DIMENSIONS TO
BE DETERMINED
BY PRODUCTION

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

FRACTIONS ± X	DECIMALS XX ± X XXX ± X	ANGLES ± X
------------------	-------------------------------	---------------

CONTRACT NO. _____

DATE FOR _____

APPROVALS

DRAWN	DATE
CHECKED	DATE
ISSUED	DATE

TITLE: LEAD MATERIAL, 3 CONDUCTOR

SCALE: NONE

REL DATE: _____

DWG NO: C600 0060

SHEET 4

REV 12



FASCO INDUSTRIES, INC.
MOTOR DIVISION
ELDON PLANT