

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER		.030"
INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050"
PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS		.100"
CABLE: (2) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE		.160"
JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS		.227"
	OVERALL CABLE DIAMETER	

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	23.8 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	26 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 Ω/1000'

4) AGENCY APPROVALS:

- UL AWM STYLE 2464
- (UL) NEC TYPE CM
- CSA AWM FT4

5) APPLICATION:

CONTROL AND SOUND INTERCONNECT CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:


QUABBIN 7260R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:

1. BLACK X RED
2. BLACK X WHITE

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

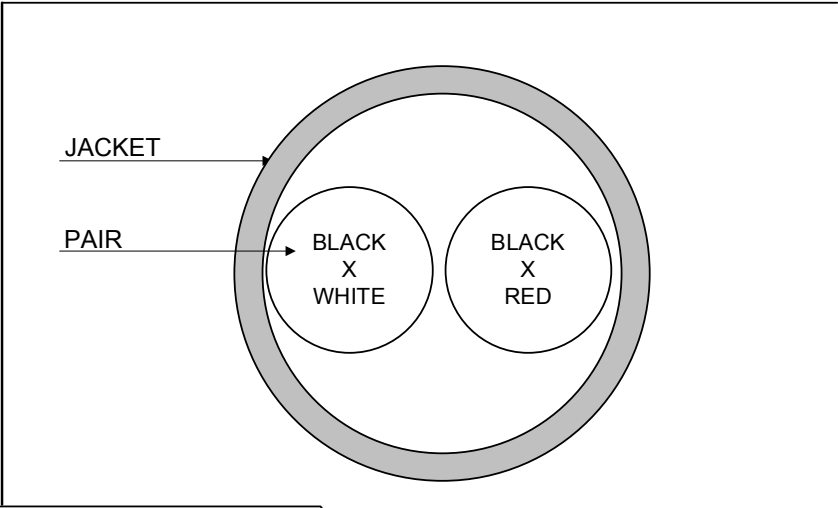

REVISION 03	DATE:	DRAWN S. ADDIE 6/27/96	
REVISED BY	<i>B. Duczynski</i> 4/13/07	CHECKED J. RIVERNIDER 6/27/96	
CHECKED	<i>J. Rivernider</i> 4/17/07	CHECKED M. FERRERO 6/27/96	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE
			2 PR. 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 7260 1 OF 1